

MINCA DIY PENDANT

22055/05 – MATT WHITE COLOUR



Before first using your new Brilliant DIY pendant, it is most important that you read and follow these instructions, even if you feel you are quite familiar with this type of product. Keep this document handy for future reference.

DIY Installation

WARNING : Any alteration or additions to building wiring must be done by a licenced electrician or person authorised by legislation to work on the fixed wiring of any electrical installation in accordance with the latest AS/NZS 3000 and relevant amendments.

For Your Safety

- To prevent electrical shock, please ensure the power is **OFF** before the installation.
- The DIY pendant fits standard B22 ceiling batten holders typically installed in Australian homes.
- During use the light head and/or light assembly may become hot.
- Do not touch the metal head with bare hand while it is 'ON'.
- Do not install in a position where the fitting can be easily accessed by children or the infirm.
- Be aware of the height of your installation. Refer to '**Working at Heights**' guide from your local or State Authorities.
- Any alterations or additions to building wiring **must be completed by a licensed electrician** or person authorised by legislation to work on the fixed wiring of any electrical installation.
- If you aren't familiar with this type of DIY fitting or unsure how to install it, please contact a licenced electrician for installation.

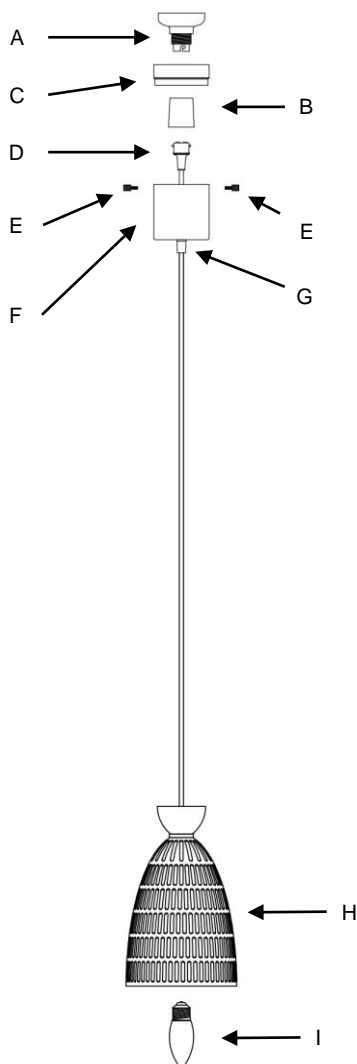

INSTALLATION

ENSURE POWER IS SWITCHED OFF AT THE MAINS PRIOR TO INSTALLATION.

The unit is designed to fit most standard B22 Batten Holders typically installed on the ceiling in Australian homes.

- 1) Remove the product from packaging and dispose of the packaging material thoughtfully.
- 2) **WARNING:** You are about to attach this light fitting to your existing batten holder. Please ensure the batten holder can support the weight of this fitting. If unsure, consult your local electrician.
- 3) First remove the globe (if fitted) from existing B22 Batten Holder. Then remove the B22 lamp skirt 'B' by unscrewing it. Fig. 1
- 4) Remove the 2 screws 'E' from the ceiling canopy body 'F'. Separate the metal 'C' from the ceiling canopy body 'F'.
- 5) Install the metal cup 'C' on the B22 Batten Holder and secure it by previously removed B22 lamp skirt 'B'.
- 6) Loosen up the screw in cord anchorage 'G' and allow ceiling canopy body 'F' gently to slide down on the cord to adjust the pendant head 'H' height you preferred. Tighten the screw in the cord anchorage 'G'.
- 7) Fit the B22 Adaptor Plug 'D' into existing B22 Batten Holder 'A' on the ceiling. Ensure connection is firm and secure.
- 8) Any excess cable should keep inside the ceiling canopy body 'F'.
- 9) Secure the ceiling canopy body 'F' onto the metal cup 'C' using previously removed screws 'E'.
- 9) Insert E27 globe 'I' (NOT INCLUDED) into the lampholder. Do not exceed the maximum 42 wattage.
- 10) Your suspension kit is ready to use. Turn on the light.



MINCA DIY PENDANT

22055/05 – MATT WHITE COLOUR

SPECIFICATIONS

- 220-240V AC 50Hz
- E27 42W MAX (Globe not included)
- Ceiling canopy body & pendant head material: Metal
- Protection: Class II
- Suitable for INDOOR use ONLY.
- Suspension cord length: 850 mm
- Weight: 0.71 kg (Globe NOT Included)

NOTE: When require replace the globe, ensure the maximum wattage is not exceeded 42W.

WARNING

- Use only with existing ceiling B22 Batten Holders.
- The maximum allowable suspension weight is 2kg for the pendant, including a lamp shade,
- Check that your B22 Batten Holder is firmly fixed to the ceiling and can handle the weight of the pendant.
- The globe and the metal head becomes extremely hot when in use. DO not touch the globe or the metal head with bare hands while the unit is operating. Always wait for the unit to cool down to room temperature before replace the globe or clean.
- Clean only with a soft clean cloth.
- Do not attempt to perform modification or change parts within the light fixture.

Environmental Protection:

This electrical product should not be disposed as normal waste. Please always recycle! Check with your Local Council about your recycle options.



Warranty:

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 3 years from date of purchase or as specified elsewhere. For products used in non-domestic or commercial applications, Brilliant Lighting warrants this product for a period of 3 months from date of purchase. This warranty is only valid for products installed and operated within the guidelines specified by Brilliant Lighting, and within the correct operating voltage ranges as stated on the product's rating label.

Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, incorrect installation, service by unqualified or unauthorised personnel or lack of regular maintenance and cleaning. Proof of installation by qualified personnel may be required, e.g. Electrical Safety Certificate. Proof of purchase must be supplied with all warranty claims.

This warranty is provided in addition to any other rights and remedies of the customer under any law. In applications not intended for household, personal or domestic use, liability is limited to replacement or reimbursement of product only. Brilliant Lighting does not warranty the costs of removal or re-installation of this product or associated components.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within the specified warranty period from date of purchase of this product. To make a claim under the warranty; at your own expense take the product (with proof of purchase – receipt or similar) to the store where you purchased the product or contact Brilliant Lighting at the address below.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.
ABN 37 006 203 694
956 Stud Road Rowville, VIC 3178
Phone: 03 9765 2555
Email: Warranty@brilliantlighting.com.au
Web: www.brilliantlighting.com.au
MADE IN CHINA