


mollers


ROLLER BLIND INSTALLATION INSTRUCTIONS


HOW TO INSTALL

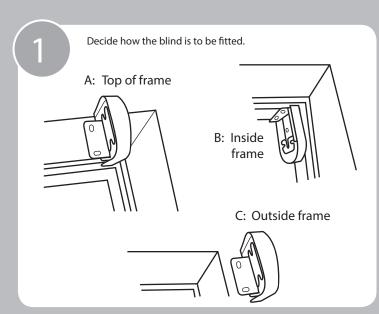


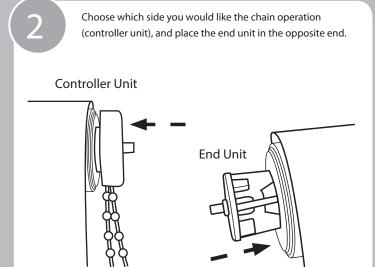


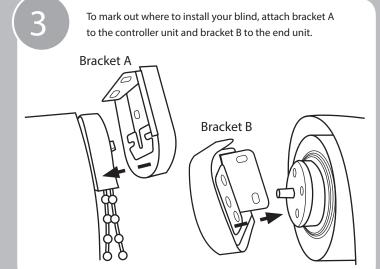

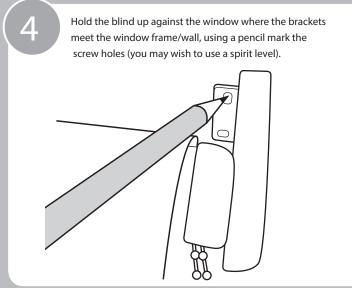



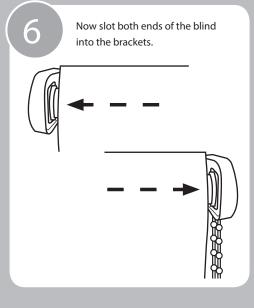

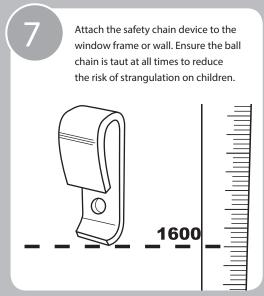




A cord guide may be installed lower than 1600mm above floor level if the cord is sufficiently secured or tensioned to prevent a loop of 220mm or longer from being formed.


If a cord guide is installed lower then 1600mm above floor level it must be designed to prevent a child from being able to remove the cord; and


If a cleat is used to secure the cord it must be at least 1600mm above the floor level because a child is capable of unwinding a cord from a cleat.

HOW TO OPERATE YOUR BLIND

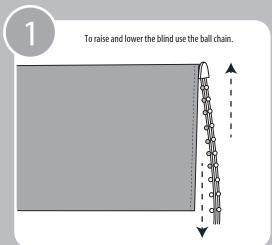



HOW TO CARE FOR YOUR BLIND

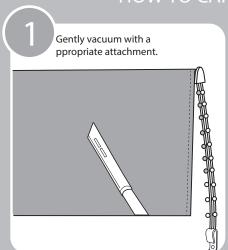

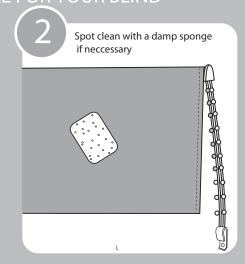

ACCESSORIES ENCLOSED







Fixing Screws and Masonry Plugs



Safety Chain Device





WARNING: CURTAIN AND BLIND CORDS HAVE CAUSED THE DEATH OF YOUNG CHILDREN AND MUST BE INSTALLED SO THAT THEY ARE NOT A STRANGULATION HAZARD. FOLLOW THE INSTALLATION INSTRUCTIONS.



MARNING

Youngs children have died by wrapping loose curtain and blind cords around their necks.
Secure cords or chains with cord guides or keep them out of reach by winding them around a cleat. Move cots and furniture away from window covering cords or chains.



A

WARNING

The tension device reduces the hazards of strangulation or entanglement by limiting access to the cord or bead chain. Anchor the device with the cord or bead chain to the wall or floor, so young children cannot pull the cord or bead chain around their necks. Always keep cords out of the reach of young children.

