



SpecRite™ 
Manufactured For Results.

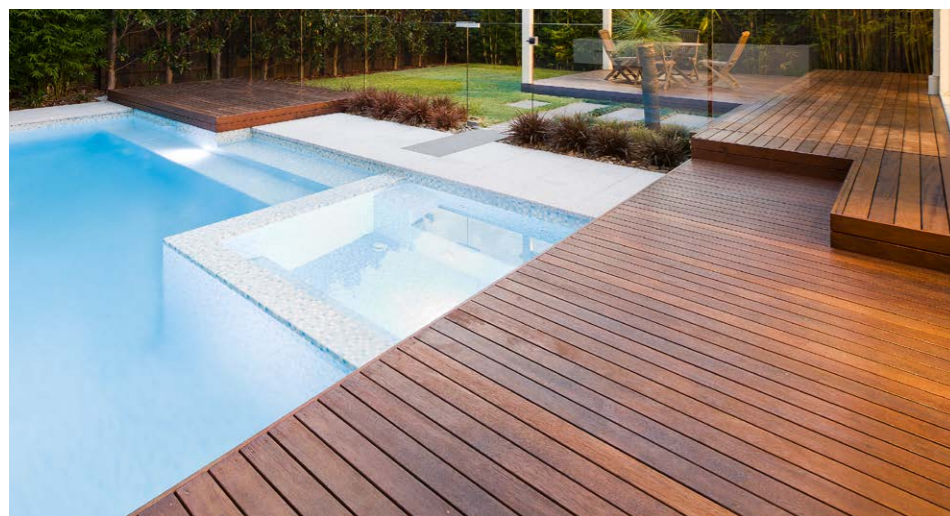

SpecRite Kwila **Outdoor Product Range**

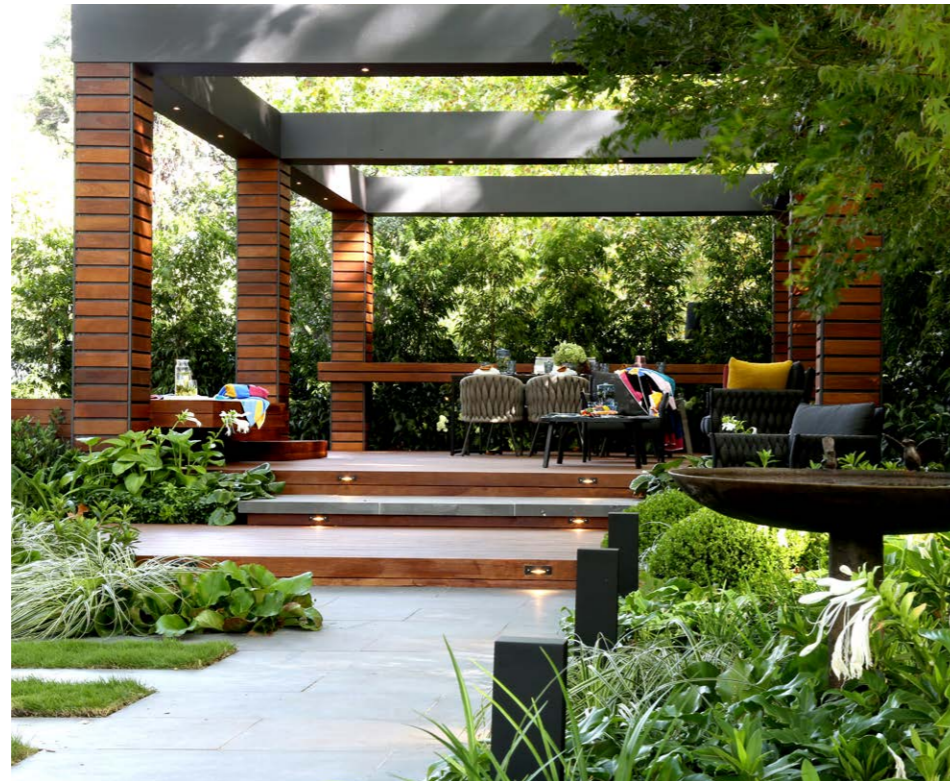

Why Choose SpecRite Kwila?

Built to Last

A deck is a long-term investment, so you want one that will stand the test of time. When it comes to decking, stability is everything.

The constant exposure to the elements can cause some timbers to warp, cup, or split over time. Kwila, however, is known for its exceptional stability and low dimensional movement, making it ideal for New Zealand's climate.

Compared to other popular decking timbers, Kwila offers superior stability that comes with a lower risk of structural issues, keeping your deck beautiful and functional for years to come.

Kwila is also exceptionally durable, with a Class 1 above ground rating for durability, meaning it can last over 40 years with the right maintenance.

Its natural resistance to rot, decay, termites and fungi ensures superior performance compared to many other decking materials.


When properly installed and maintained, your kwila deck can remain sturdy, reliable, and beautiful for generations.

Pre-Oiled Protection

To ensure your deck starts strong, SpecRite Kwila is now available pre-oiled with a Feast Watson® coating that's compatible with both oil- and water-based finishes.

This treatment helps seal the timber against moisture and UV exposure, providing an added layer of protection to all sides of your timber before you apply a final topcoat.

It's a smart way to set up your deck for a great finish.

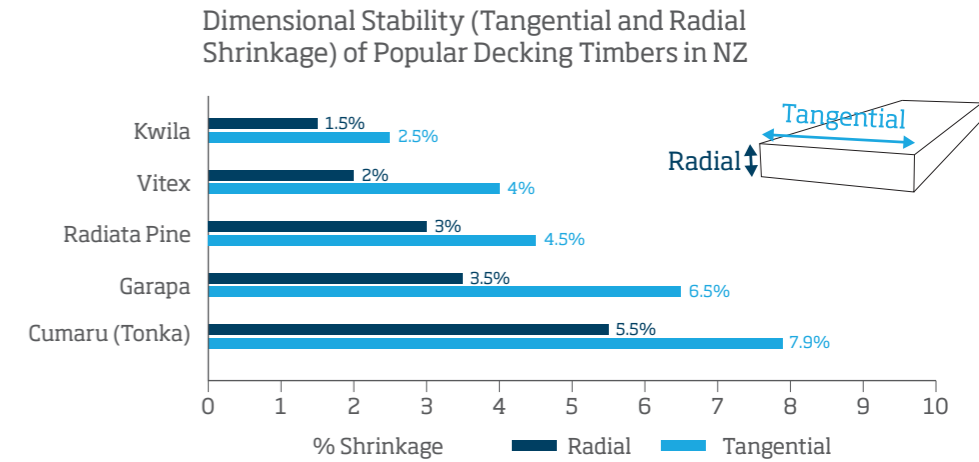

Source: Bootle, K. R. (2010) Wood in Australia, 2nd Edition

Sustainably Sourced

Choosing Kwila doesn't mean sacrificing sustainability.

SpecRite Kwila is FSC®-certified, supporting responsible forestry practices.

The Forest Stewardship Council (FSC) is a positive force for change that supports biodiversity and climate resilience.

When you choose FSC-certified products, you're helping to take care of forests for future generations.

FSC certification requires periodic review and you can check the FSC status of our SpecRite Kwila supplier at any time:

info.fsc.org
Certification No:
SCS-COC-005449



Naturally Versatile

One of timber's greatest strengths is its versatility - and with Kwila, the possibilities are endless. The SpecRite range of Kwila products includes decking, screening, fencing, balustrades and posts.

Unlike composite alternatives that expand and contract across the length of the board, Kwila expands and contracts across its width, meaning fully flexible design possibilities without the requirement to incorporate breaker boards every few metres.

Tried and Tested

Kwila has been a trusted timber decking choice for generations of New Zealanders. It's a tried and tested material that remains popular for its strength, beauty and longevity.

Kwila doesn't cause static shock or overheat like some alternative decking materials.

With its warm, rich tones, Kwila continues to captivate homeowners and designers alike - providing a stylish, naturally sophisticated look that's hard to beat.

¹ Source: Australian Standard 5604-2005 Timber - Natural Durability Ratings

A great finish starts with **SpecRite Pre-Oiled Decking**



- > **Helps save time on installation**
- > **Already primed for topcoating**
- > **Protects from moisture and UV during installation**
- > **Base level protection for the underside of the deck**
- > **Further improves stability**
- > **Helps deliver a premium finish**

Why Choose Pre-Oiled Decking?

When laying a deck, it's common to lay the raw timber, allow it to weather and then apply decking oil. This method works well in protecting the deck from UV after installation, but the process can result in dark, unsightly blotches where tannins in the timber have reacted to trace metals, for example, from muddy work boots during the build, or from the water supply when hosing down the timber to flush away excess tannins before the deck has been sealed.

The underside of the deck is rarely exposed to UV, but it is exposed to moisture, particularly if the deck is exposed to the elements. Excess moisture build-up from inadequate ventilation or drainage underneath the deck can affect the stability of the timber and cause unsightly bowing and cupping and can even impact the structural integrity of the subframe.

SpecRite's pre-oiled Kwila and Heavy Hopea decking products have been primed with Feast Watson® Industrial Timber Oil, which can be topcoated with most water-based and oil-based finishes. A single coat has been applied to all four sides and is designed to help seal and protect your timber from moisture, dirt and UV exposure prior to final topcoating.

Which Topcoat Should I Choose?

When choosing a topcoat, the most suitable product is best determined by your preferred look and feel.

To maintain or highlight the natural appearance of your timber, a transparent, lightly pigmented oil is recommended such as Feast Watson® Traditional Timber Oil. For longer lasting protection, a high-end water based product such as Intergrain® UltraDeck Timber Oil can be used. To transform the colour of the timber, a semi-transparent stain such as Intergrain® UltraDeck Timber Stain will impart a deeper colour while allowing the timber grain to show through.

To ensure you are completely satisfied with your chosen coating and colour, we recommend you first test the coating on a small inconspicuous area.

Timber will naturally grey off if left unfinished.

Maintenance

Refer to your chosen topcoat label for product specific maintenance information. We recommend regularly monitoring the coated timber for signs of colour loss, dryness and weathering. Recoat the timber when it begins to show signs of dryness to help maintain its natural beauty and protection.

When required, clean the surface using a timber cleaner, allow the surface to dry and recoat with one coat of the original coating, following label instructions. For a longer lasting finish, apply a second coat.

Topcoating Your Deck

Step 1

Prepare for topcoating.

Ensure the decking surface is clean. If required, thoroughly scrub with Feast Watson® Woodprep.

A high strength timber cleaner can remove dirt, grease, excess tannins and other contaminants to optimise topcoat performance.

Step 2

Choose your topcoat.

Our pre-oiled decking can be topcoated with most water-based or oil-based finishes.

To maintain or highlight the natural appearance of your kwila timber, a transparent, lightly pigmented oil-based product is recommended. For longer lasting protection, apply a high-end water-based finish.

Step 3

Apply your topcoat.

Allow the timber to dry and apply two coats of your chosen finish following label instructions.

Make sure your deck has dried fully before replacing furniture.

Sit back and relax.



PRE-OILED WITH

FEAST WATSON®


ESTD 1922
PROFESSIONAL TIMBER FINISHES

READY FOR FINISHING ONSITE


Our **Pre-Oiled Decking** Products



Kwila Pre-Oiled Smooth Decking
Random Lengths

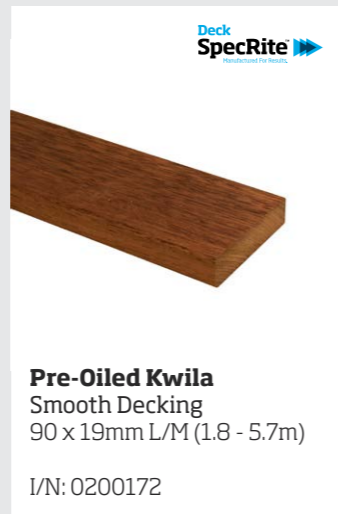


Pre-Oiled Kwila Smooth Decking
90 x 19mm L/M (1.8 - 5.7m)
I/N: 0200172

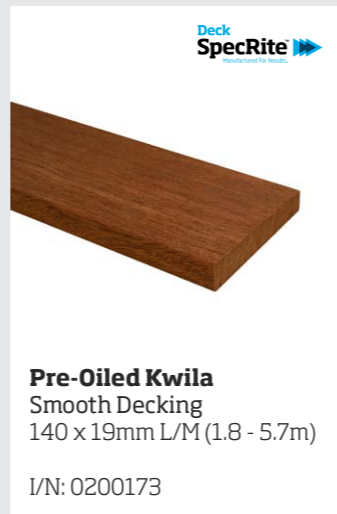


Pre-Oiled Kwila Smooth Decking
140 x 19mm L/M (1.8 - 5.7m)
I/N: 0200173

More Outdoor **Kwila** Products

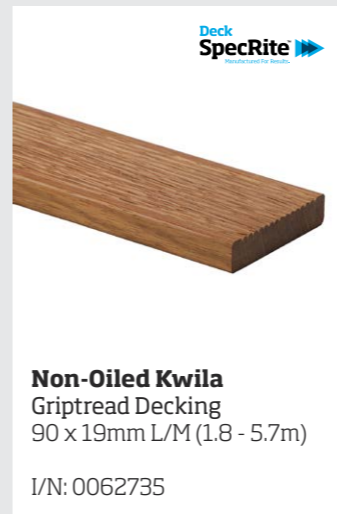


Non-Oiled Kwila Griptread Decking
90 x 19mm L/M (1.8 - 5.7m)
I/N: 0062735

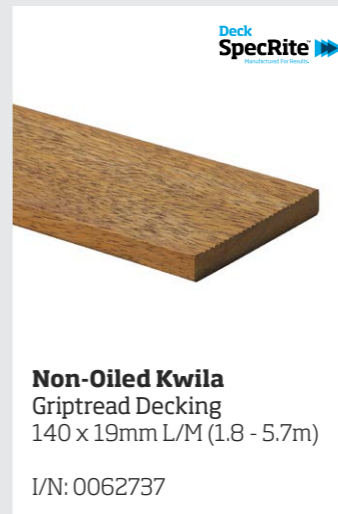

Non-Oiled Kwila Griptread Decking
140 x 19mm L/M (1.8 - 5.7m)
I/N: 0062737



Kwila Non-Oiled Griptread Decking
Random Lengths

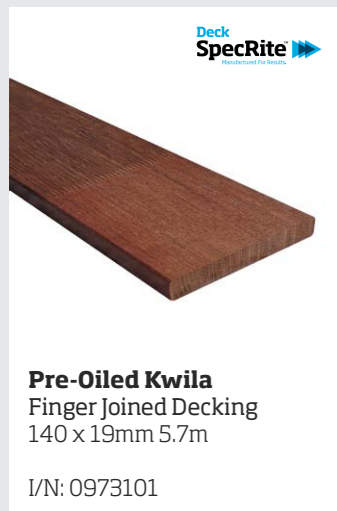


Pre-Oiled Kwila Finger Joined Decking
140 x 19mm 5.7m
I/N: 0973101




FJ Kwila Pre-Oiled Smooth Decking
5.7m Set Lengths

Made from multiple select grade, kiln dried boards, joined together into highly sought after 5.7m lengths with robust face joints using weather resistant A-Bond glue.


Our FJ Kwila decking comes with a 25 year warranty (limited to joint failure).

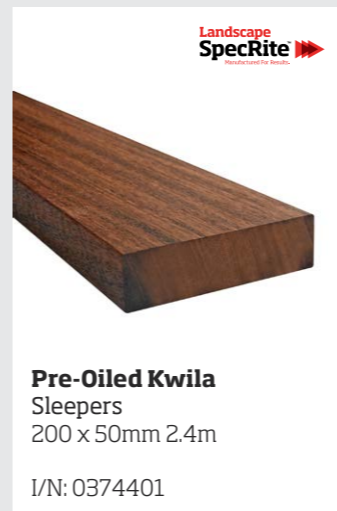


Pre-Oiled Kwila Sleepers
200 x 50mm 2.4m
I/N: 0374401

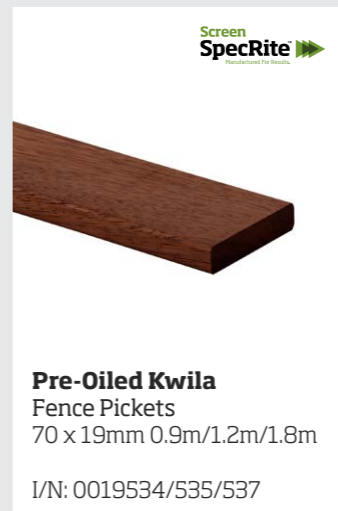

Pre-Oiled Kwila Fence Pickets
70 x 19mm 0.9m/1.2m/1.8m
I/N: 0019534/535/537

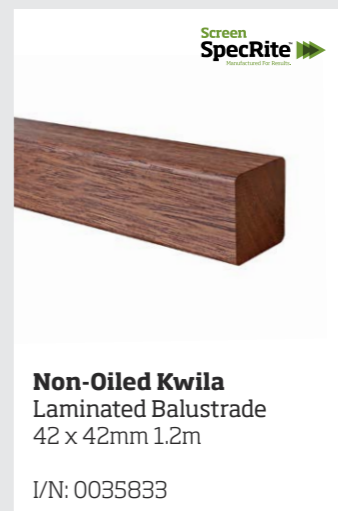


Non-Oiled Kwila Laminated Balustrade
42 x 42mm 1.2m
I/N: 0035833

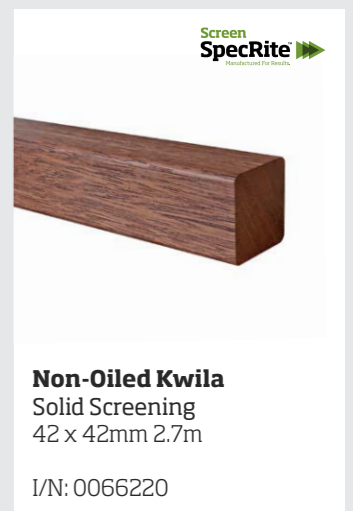


Non-Oiled Kwila Solid Screening
42 x 42mm 2.7m
I/N: 0066220

Our Heavy Hopea offers a unique solution for your next decking project. The strong and stable timber comes in beautiful honey-oak tones and its fine texture and grain make it easy to work with.

Heavy Hopea's natural durability and strength make it ideal for external applications.

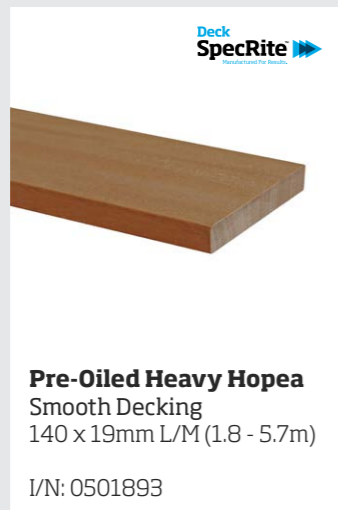


Pre-Oiled Heavy Hopea Smooth Decking
140 x 19mm L/M (1.8 - 5.7m)
I/N: 0501893

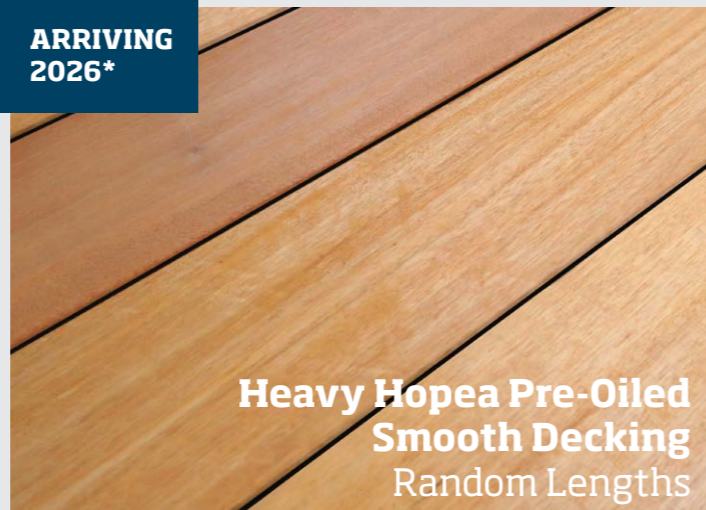

Heavy Hopea Pre-Oiled Smooth Decking
Random Lengths



Non-Oiled Kwila D4S F27 Solid Post
90 x 90mm 2.4m
I/N: 0342941

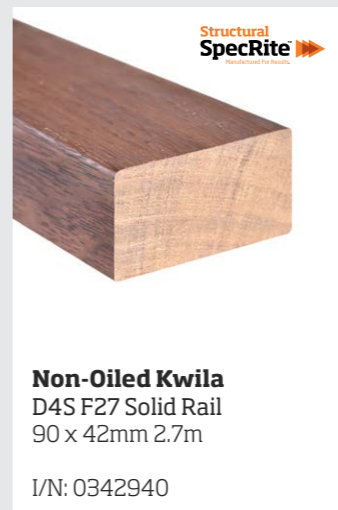

Non-Oiled Kwila D4S F27 Solid Rail
90 x 42mm 2.7m
I/N: 0342940

Visit Our Website

Scan the QR code to see the full range of SpecRite products, as well as helpful articles and FAQs or visit:



specrite.co.nz





Find out more
online at
specrite.co.nz



FSC certification requires periodic review and you can check the FSC status of our SpecRite Kwila and Heavy Hopea supplier at any time:

info.fsc.org
Certification No: SCS-COC-005449

The mark of
responsible forestry

SpecRite™ 
Manufactured For Results.