


222-224 Hammond Road, Dandenong,
Victoria 3175, Australia
T: +61 3 97067577 F: +61 3 97067577
E: vic@australclotheshoists.com.au
www.australclotheslines.com.au



Start here to cord inner lines.

Begin by cording the very outside line first to ensure rotary frame remains square. Knot the cord and secure in an outer Clip. Form the outer line square and finish with another knot.

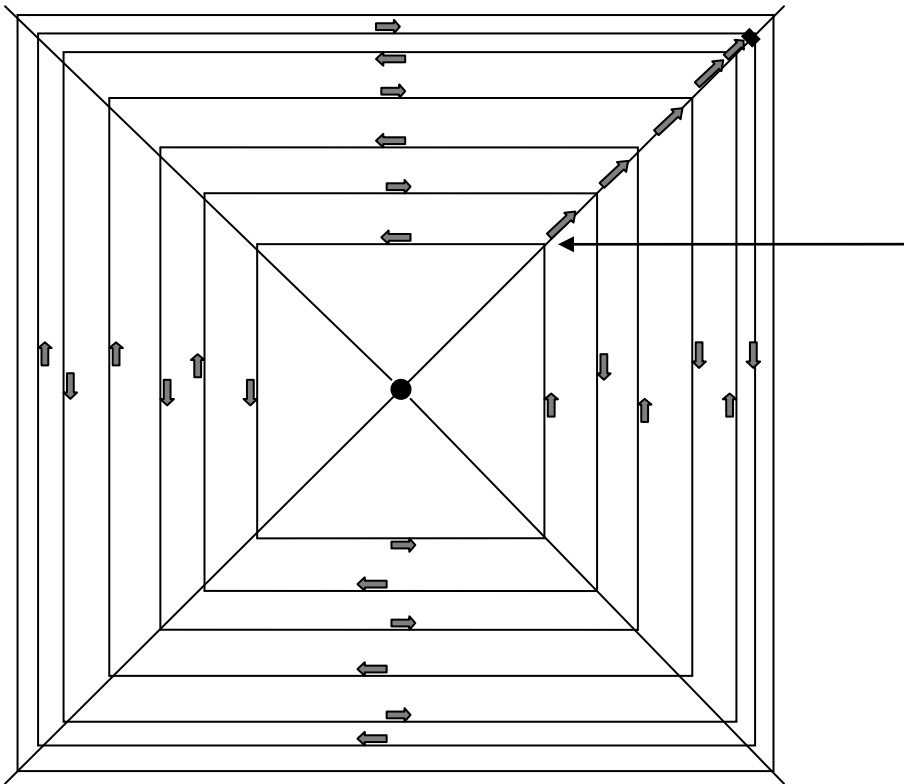

How to cord the inner lines:

Locate the black Tension Knob and ensure it is positioned over the second set of punched holes from the outside (second line from the outside).

Commence cording from the Clip nearest the column, on the same Arm as the Tension Knob. Use a single knot to secure the cord through the first Clip (nearest the column) and pull the cord through the first clip on each Arm to form a square.

The first square may be formed by pulling the cord in either direction but each subsequent square must be formed by pulling the cord in the opposite direction. Remember to keep line taut as each square is formed.

On reaching the starting Clip, pull the cord down along the Arm to the second Clip (see image above).

Pull cord through the Clip and through the second Clip on each Arm to form another square – remembering to go in the opposite direction to the first square (as per diagram). Repeat this procedure until you reach the Tension Knob.

Pull the cord through the Clip over the Tension Knob. Raise the lever on the Tension Knob and pull cord through the hole directly under the lever. Lock lever back into position when line is sufficiently taut. Leave about 15cm of cord before cutting off any excess cord. Pull cord around the pin to form a 'U' shape. This will assist in further securing the cord.



If cord requires tensioning: pull on each line starting near the column and on the same Arm as the Tension Lock. Take up any excess along the top of the Arm before moving to the second line. Continue taking up the slack on each line until you reach the Tension Knob. Unwrap the cord from the 'U' shape and raise the Tension Knob lever. Pull the excess cord through, lower the lever and replace cord around pin to secure.

Austral's cord is available in 40m, 60m and 450m rolls. The outer coating of Austral's cord is manufactured using a vinyl, flexible compound which contains no lead. Materials have been selected to minimize the stretching of the outer coating and to ensure the cord can withstand the harshest of climatic conditions.

For further information please visit our website: www.australclotheslines.com.au

FOLDAWAY ROTARY ACCESSORIES

PRODUCT	DESCRIPTION	APN	VPN
FOLDAWAY Retainer Clips			
Suitable for FoldAway 45 & 51.			
The cord clips are available as mixed packs of inner and outer clips.			
Retainer Clips 8 Pk.	6 x inner; 2 x outer	9315384400140	FACLIP8
Retainer Clips 14Pk.	12 x inner; 2 x outer	9315384400249	FACLIP14

The 2 prongs on the lower part of the Clip will slide down into the punched holes in the Arms, leaving only the upper portion of Clip exposed. The Cord can be pulled back into the Clip without recording the entire Clothesline.

Current model Clips (after 1997)



Internal Clip
(for use on all 6 internal lines)



External Clip
(for use on the very outside line only)

Pre 1997 Clip (no longer available).



If your Clothesline has the older style Clips you may need to make some adjustments. To adjust new Clips, run a square file through clip centre. Alternatively, the Clip opening on the FoldAway Arms may need to be opened up to fit the new clip's curved centre. Carefully, insert 2 large screwdrivers into the Clip opening and push against metal edge to reduce the amount of steel between the 2 holes.

For further information please visit our website: www.australclotheslines.com.au