



WARNING.  
FOR DOMESTIC  
AND OUTDOOR  
USE ONLY



RECYCLABLE  
MATERIALS



Let us help you

Scan QR code for  
Installation video and  
view on our website  
[swingslideclimb.com.au/how-to/](http://swingslideclimb.com.au/how-to/)

# 7 Function Swing Set



Powder Coated  
Steel



UV Stabilised

3+

3+ Years



Basket Ball Ring  
And Ball Target




Trapeze & Swings



2 Seat Glider  
Swings



1.8 M Slide

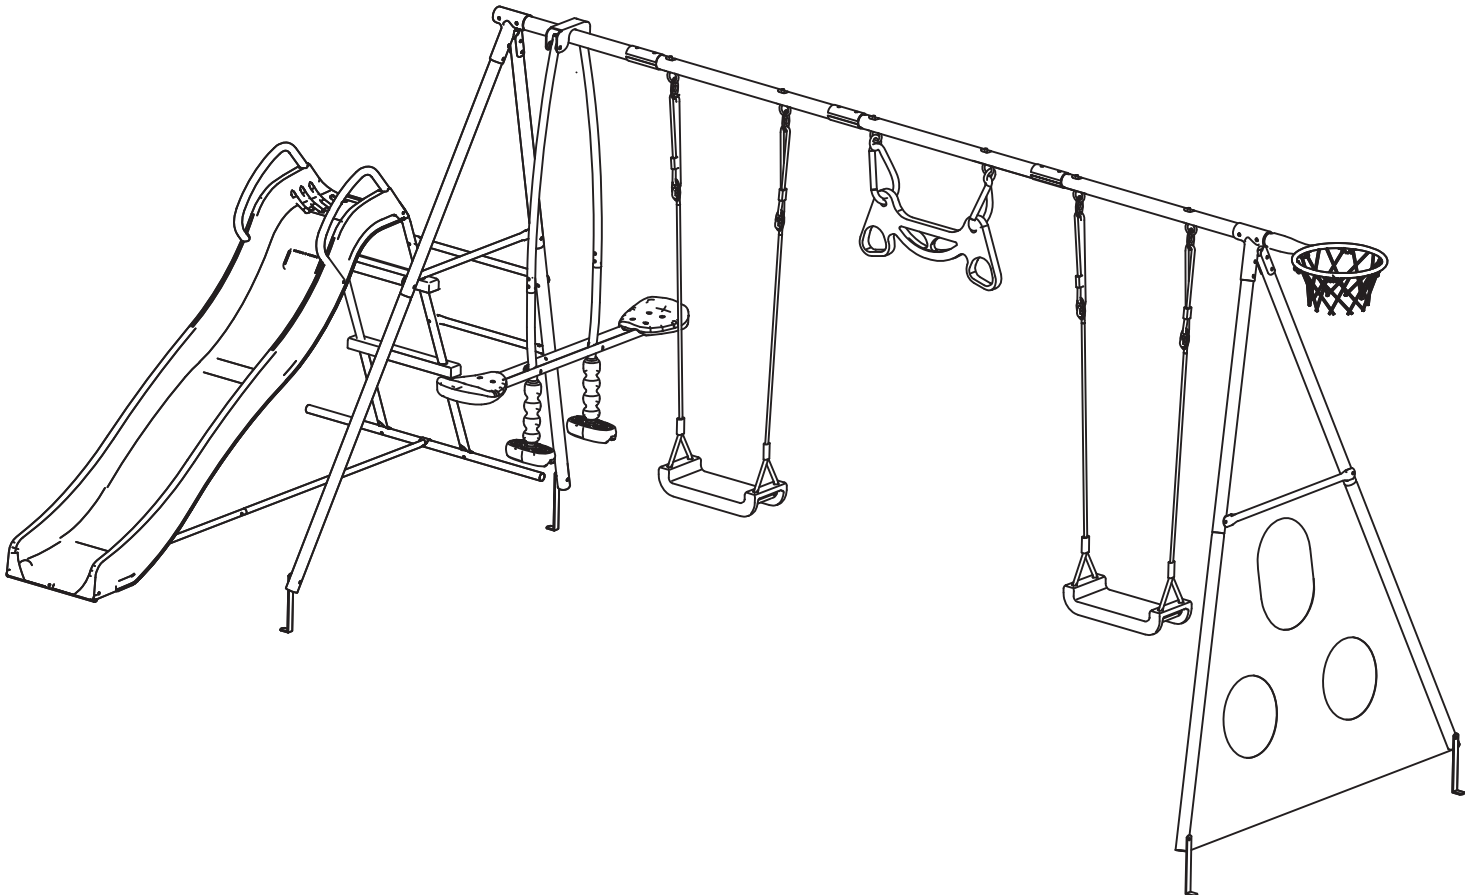

WARNING. ONLY FOR DOMESTIC OUTDOOR USE.

THIS PLAYSET SATISFIES ALL THE REQUIREMENTS OF THE AUSTRALIAN STANDARD AS/NZS ISO 8124 AND HAS BEEN CERTIFIED BY AN INDEPENDENT LABORATORY. TO GUARANTEE SAFETY. PLEASE GIVE SPECIAL ATTENTION TO THE ASSEMBLY, SAFETY AND CARE INSTRUCTIONS DETAILED IN THIS DOCUMENT.

06 / 2020

## ASSEMBLY INSTRUCTIONS

*To be retained for future reference.*

**WARNING:** *Only for domestic outdoor use.*

Dear Customer,

To guarantee safety, please give special attention to the assembly, safety, and care instructions detailed in this document.

### ASSEMBLY ADVICE

Please follow the assembly instructions exactly as given.

- This product must be assembled by an adult.
- Keep a copy of your assembly instructions for future reference. This can be particularly handy for identification of parts if any after sales service is required.
- The EN 71-8, chapter 4-6 standard requires a 40cm minimum distance between the ground and a 2 person swing and a 35cm minimum distance between the ground and swings. These distances are important for safe use. After having assembled the playground, check these distances. In case of non-conformity, do not hesitate to contact our after sales service.
- We advise that the swing set is not faced towards the sun
- Before commencing, check that none of the parts are missing. If you find that you are missing a part please contact our after sales service department.
- Dispose of packaging thoughtfully.
- Do not allow children to play with packaging.

### SAFETY ADVICE

- This product must not be used by children under the age of 36 months. It is suitable only for children between the ages of 3 and 12 years with a maximum weight of 50kg. It must be used under adult supervision.
- As this product contains small parts that could be swallowed, please keep parts away from children under 36 months.
- This product is only for private use at home and must never be used in parks and public gardens, in schools, camp sites, hotels, public leisure areas, etc.
- The swing set should be set up on a flat surface 2 metres away from all other things, structures or obstacles (walls, fences, trees, washing lines or electric cables etc.) that could cause injury during use.
- This product must not be set up over hard surfaces such as concrete, asphalt or other hard surfaces. We recommend installation over grass or other such soft surfaces.
- This swing set must be embedded firmly into the ground. Please follow the instructions carefully for doing so. Only use this product when the concrete is dry.
- Anchors should be placed level with or below ground level in order to reduce tripping hazards
- The anchorage must be checked regularly, in addition to the hooks and fixtures.
- Dispose of packaging thoughtfully.
- Do not allow children to play with packaging.

### FIXING INTO THE GROUND

- 1- Assemble the swing set completely and place it in the desired place.
- 2- Locate and mark the position for the sealing legs.
- 3- Check the dimensions showed on the diagram, and correct if necessary.
- 4- Under the four feet, mark a square of 350 X 350 mm and dig a 350 mm deep hole.
- 5- Fill these holes with concrete following the diagram of the recto. The top of the concrete should not exceed ground level.

6- Place the sealing legs in the concrete in the located place (see point 2). Make sure the drilled end of the sealing legs is above the level of the concrete.

7- Once the concrete is set, screw the feet into the sealing legs.

8- Ensure that the concrete is completely dry before using the swing.

9- Cover the concrete with soil.

We strongly advise checking this anchoring periodically

### MAINTENANCE

All metal parts are galvanized steel and powder coated for rust protection; however, in certain areas close to the sea we advise that additional rust prevention treatment may be necessary.

. The surfaces of all the parts should be checked at least once a month, especially for the fixtures such as hooks on the overhead beam. If the fixtures and hooks show wear over 10% of their original thickness, then they should be replaced with the same fixtures as those originally provided.

. All parts that are under constant friction should be oiled regularly with a suitable lubricant.

. The ground on which the product is placed should be controlled regularly. All elements such as stones or other objects that could cause injury in the case of a fall should be removed.

. It is advised to remove the apparatus during the winter period, when not in use, to avoid any deterioration due to bad weather conditions.

. Check for signs of wear, especially where swinging apparatus' plastic ring attaches to the metal swing hooks on the upper beam. As soon as the plastic ring shows signs of deterioration, the apparatus should be replaced.

. All used apparatuses and/or parts must be replaced by a part delivered by our after sales service, or by an approved retailer.

### PRACTICAL ADVICE

*Frequent questions and observations*

#### Safety

Safety checks should be carried out regularly on this product. These checks should include, if necessary, removing any sharp edges, replacing missing screw covers, and tightening the nuts and bolts. These checks should be done to avoid any danger or upturning of the swing set through normal wear and tear.

#### Comfort

If the swing set develops a squeak apply a suitable gel lubricant. Do not use liquid lubricant as it will run down the fixings and apparatus. The height of the swing can be adjusted using the plastic eyelet fixture. By pulling the rope through the fixture, the height of the seat can be adjusted to suit the user.

The dimensions given are indicative only, they may vary according to the assembly method.

This Swing Set must be used under adult supervision. Keep any additional components, they may be useful for later operation of maintenance.

**CAUTION !** Fall danger.

### Consumer information sheet for playground surfacing materials

The US Consumer Product Safety Commission (CPSC) estimates that about 100000 playground equipment-related injuries resulting from falls to the ground surface are treated annually in US hospital emergency rooms. Injuries involving this hazard pattern tend to be among the most serious of all playground injuries, and have the potential to be fatal, particularly when the injury is to the head. The surface under and around playground equipment can be a major factor in determining the injury-causing potential of a fall. It is self-evident that a fall on to a shock-absorbing surface is less likely to cause a serious injury than a fall onto a hard surface. Playground equipment should never be placed on hard surfaces, such as concrete or asphalt, and while grass may appear to be acceptable, it may quickly turn to hard-packed earth in areas of high traffic. Shredded bark mulch, wood chips, fine sand or fine gravel are considered to be acceptable shock absorbing surfaces when installed and maintained at a sufficient depth under and around playground equipment.

Table B.1 lists the maximum height from which a child would not be expected to sustain a life-threatening head injury in a fall on to four different loose-fill surfacing materials if they are installed and maintained at depths of 150 mm, 225 mm and 300 mm.

**Table B.1 — Fall height in millimetres from which a life-threatening head injury would not be expected**





| Type of material           | Depth of surfacing material |        |        |
|----------------------------|-----------------------------|--------|--------|
|                            | 150 mm                      | 225 mm | 300 mm |
| Double shredded bark mulch | 1800                        | 3000   | 3300   |
| Wood chips                 | 1800                        | 2100   | 3600   |
| Fine sand                  | 1500                        | 1500   | 2700   |
| Fine gravel                | 1800                        | 2100   | 3000   |

However, it should be recognised that all injuries due to falls cannot be prevented, no matter what surfacing material is used.







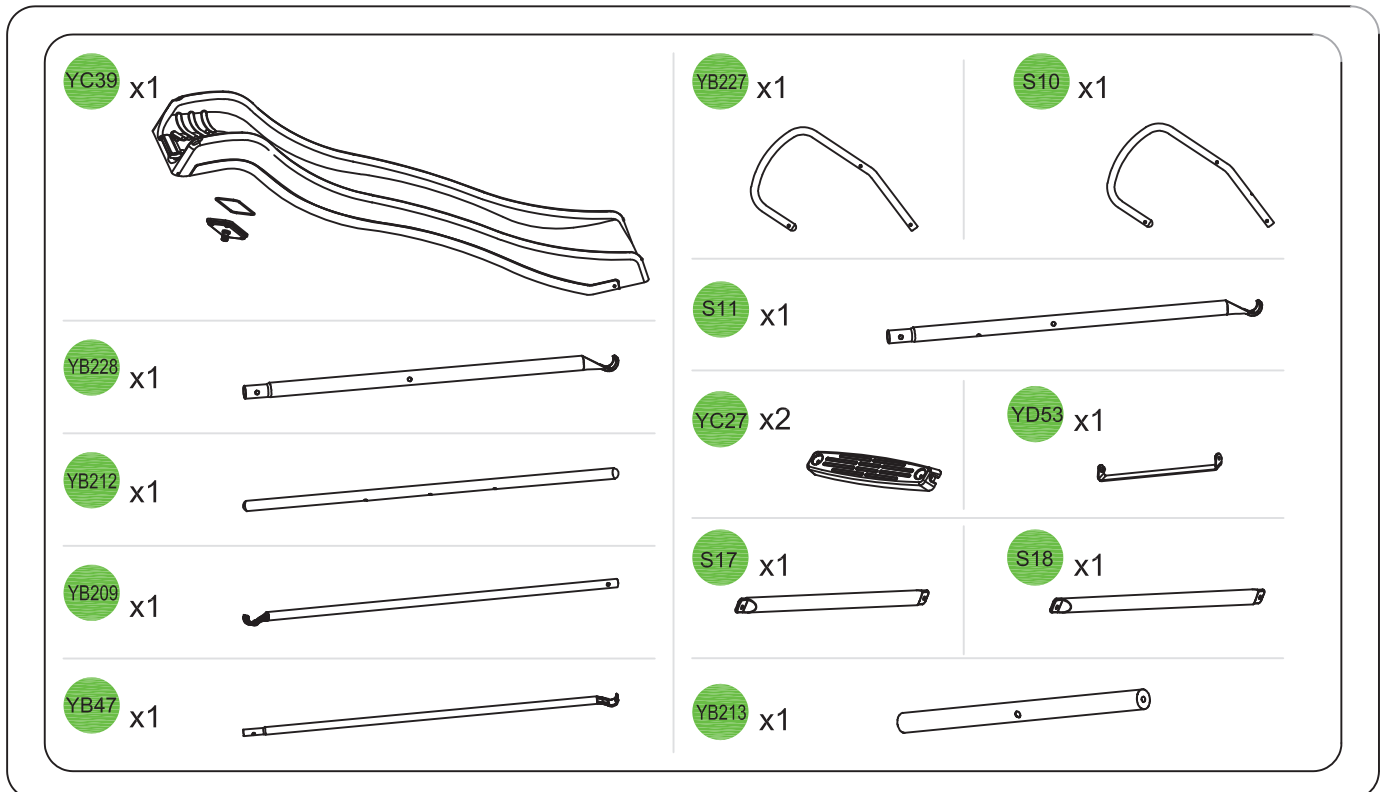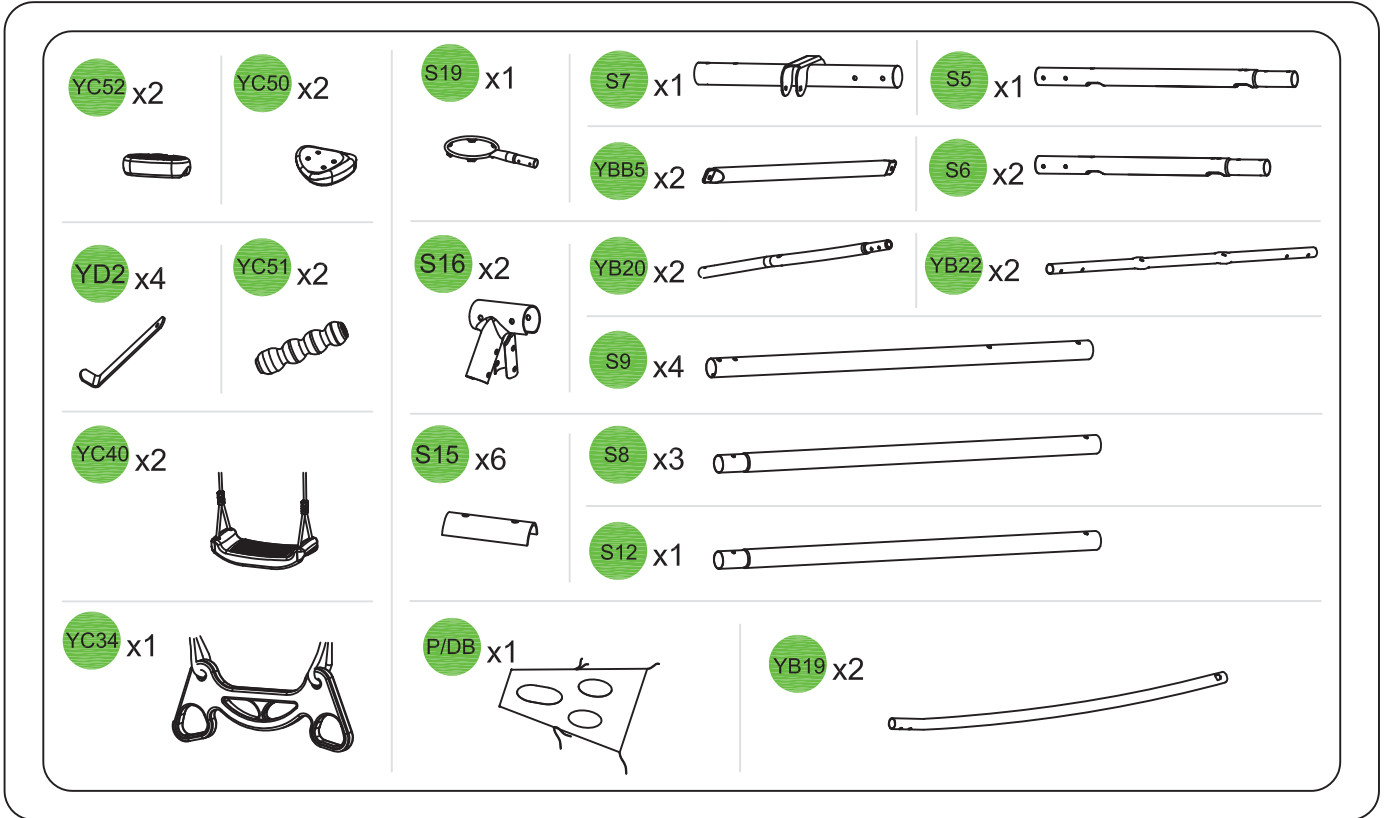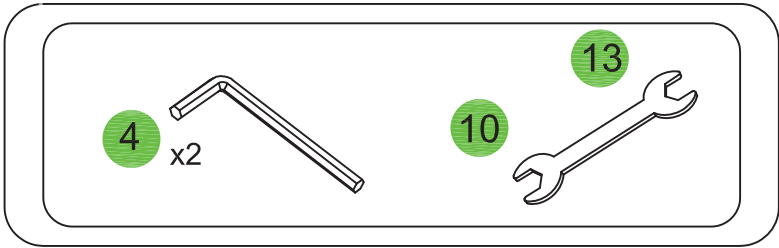

















It is recommended that a shock absorbing material extend a minimum of 1 800 mm in all directions from the perimeter of stationary equipment such as climbing frames and slides. However, because children may deliberately jump from a moving swing, the shock absorbing material should extend in the front and rear of a swing a minimum distance of twice the height of the pivot point measured from a point directly beneath the pivot on the supporting structure.

This information is intended to assist in comparing the relative shock-absorbing properties of various materials. No particular material is recommended over another. However, each material is only effective when properly maintained. Materials should be checked periodically and replenished to maintain correct depth as determined necessary for the equipment in question. The choice of a material depends on the type and height of the playground equipment, the availability of the material in a particular area, and its cost.

This information has been extracted from the CPSC publications "*Playground Surfacing — Technical Information Guide*" and "*Handbook for Public Playground Safety*".








|  |   |   |  |  |  |
|--|---|---|--|--|--|
| <p>Fa6 x4</p>  <p>M 4x13</p>  | <p>YN3 x10</p>  <p>Ø 8/M6x40</p> | <p>Fa8 x8</p>  <p>Ø 8/M6x35</p>  | <p>YN4 x4</p>  <p>Ø 8/M6x20</p> | <p>YF2 x2</p>  <p>M 8x50</p>  | <p>YF11 x8</p>  <p>M 6x25</p> |
| <p>YE1 x12</p>  <p>M 6x35</p> | <p>YE5 x2</p>  <p>M 8x78</p>     | <p>YE12 x2</p>  <p>M 6x40</p>    | <p>YE19 x3</p>  <p>M 6x13</p>   | <p>YE29 x8</p>  <p>M 6x20</p> | <p>YE9 x4</p>  <p>M 6x45</p>  |
| <p>YD10 x26</p>  <p>Ø 6</p>   | <p>YD11 x31</p>  <p>Ø 8</p>      | <p>YD12 x2</p>  <p>Ø 10</p>      | <p>YL1 x31</p>  <p>Ø 8</p>      | <p>YL2 x26</p>  <p>Ø 6</p>    | <p>YD3 x6</p>                 |
| <p>YC3 x8</p>                | <p>YG1 x2</p>  <p>M 6</p>       | <p>YG13 x49</p>  <p>M 6x20</p> | <p>YG2 x10</p>  <p>M 8</p>     | <p>YG6 x4</p>                | <p>YD15 x3</p>               |

1




- S5 x1
- S7 x1
- S6 x2
- S9 x1
- S19 x4
- YD11 x18
- YL1 x18
- S16 x2
- YN3 x10
- Fa8 x8
- YG13 x18
- S15 x6

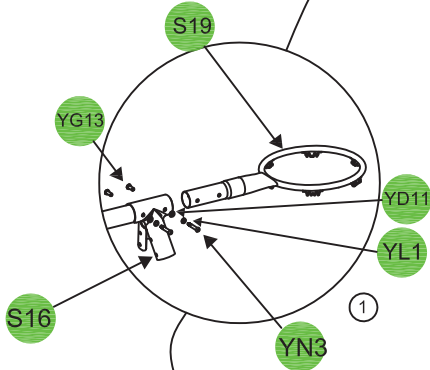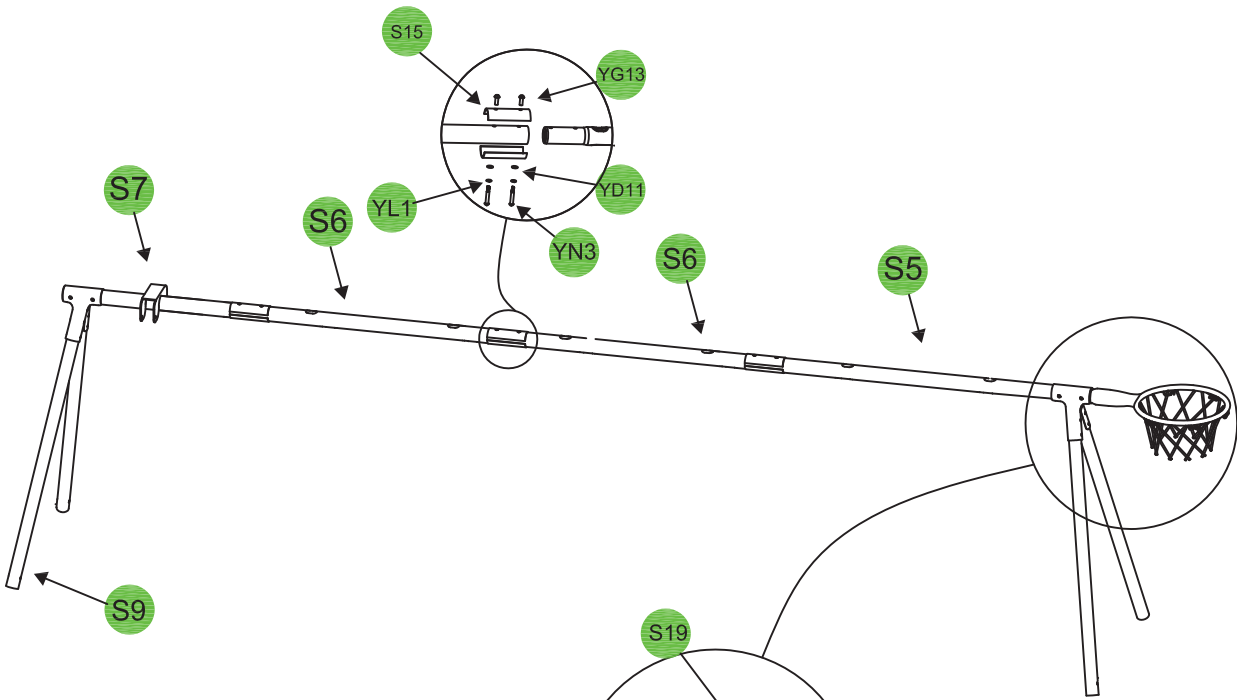


2

3


- YBB5 x2
- S8 x3
- YC34 x1
- YC40 x2
- YD10 x4
- YL2 x4
- YD3 x6
- YG2 x6
- YE1 x4
- YG13 x4
- S12 x1
- P/DB x1

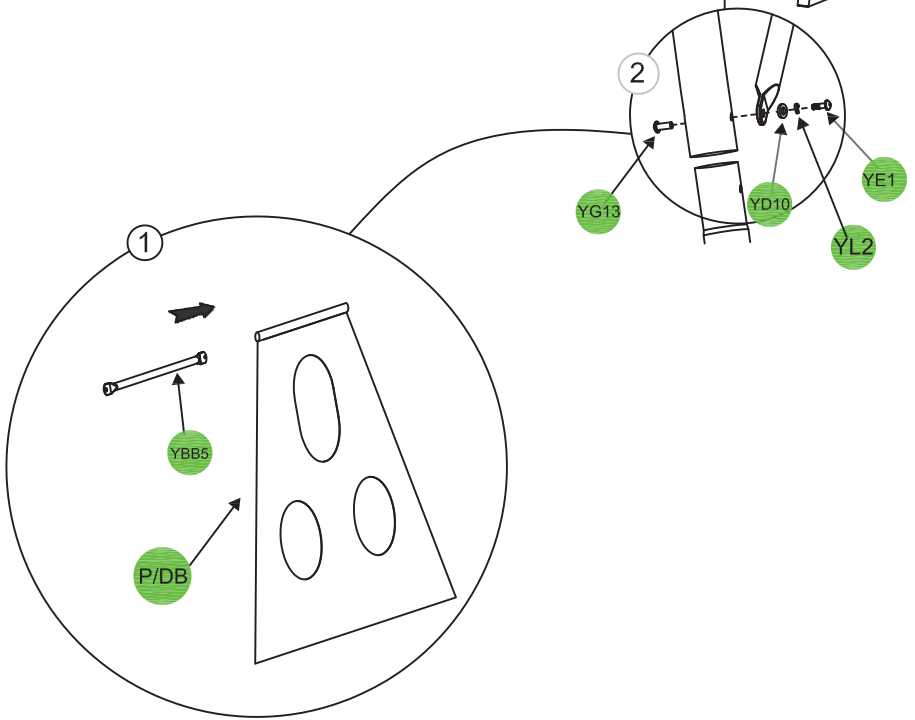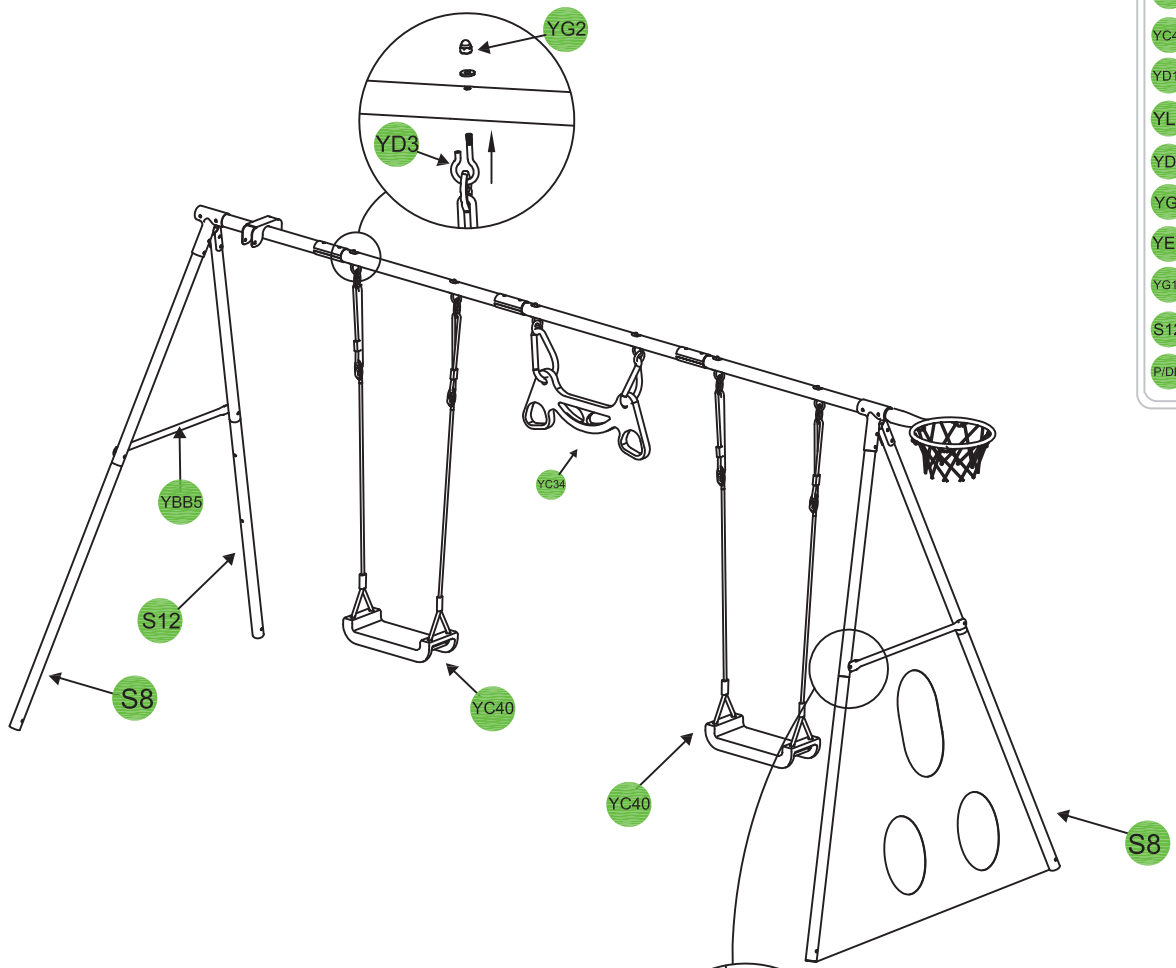



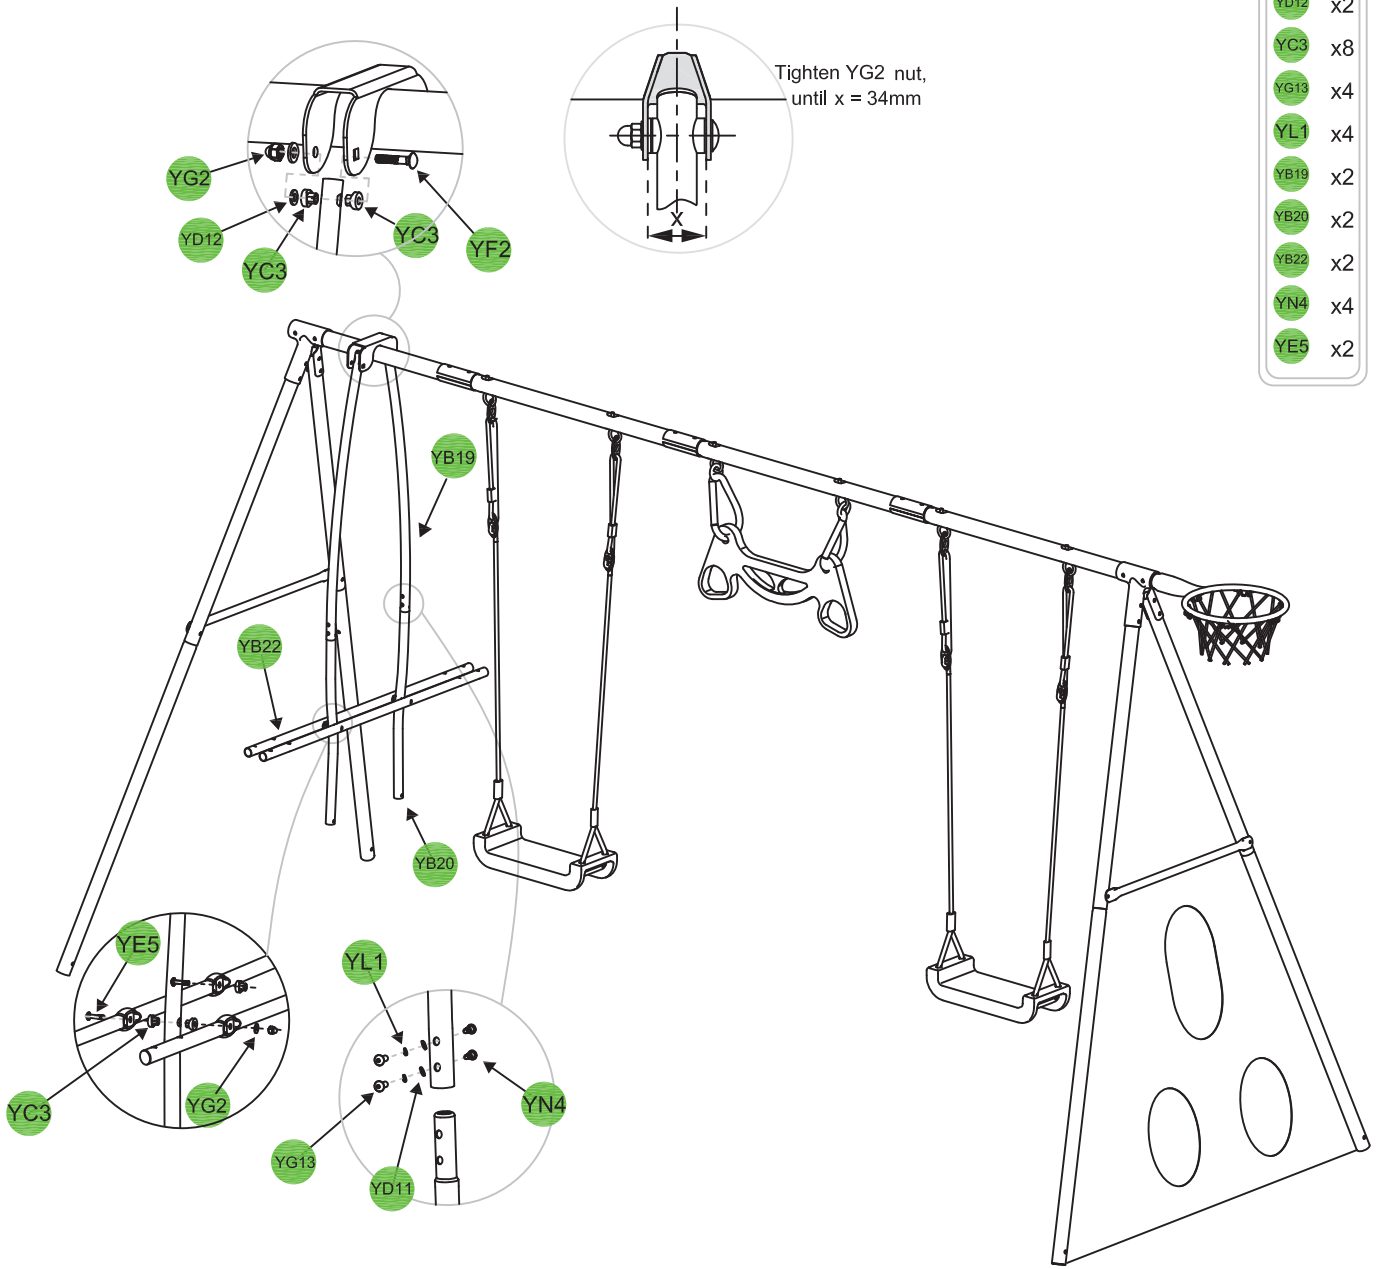

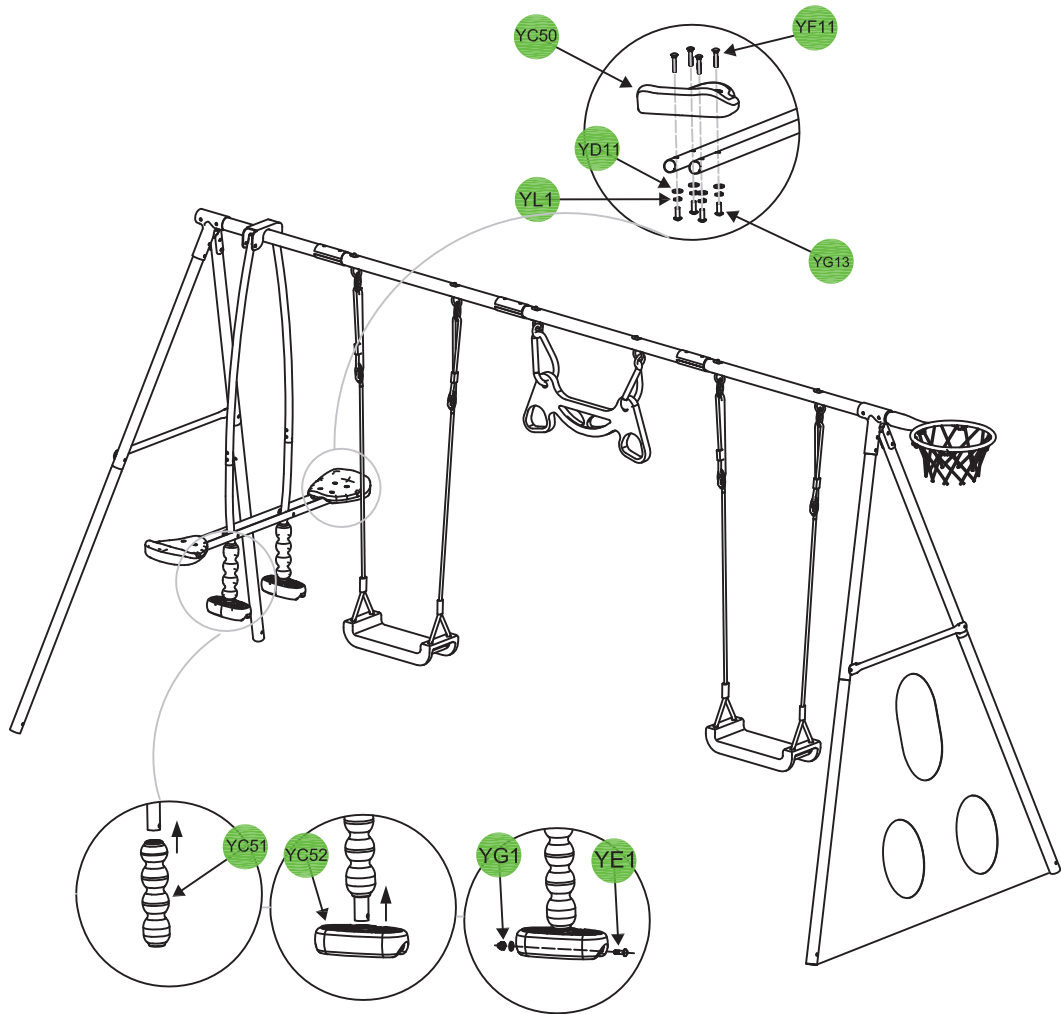

|      |    |
|------|----|
| YD11 | x4 |
| YG2  | x4 |
| YF2  | x2 |
| YD12 | x2 |
| YC3  | x8 |
| YG13 | x4 |
| YL1  | x4 |
| YB19 | x2 |
| YB20 | x2 |
| YB22 | x2 |
| YN4  | x4 |
| YE5  | x2 |






- YD11 x8
- YL1 x8
- YF11 x8
- YC50 x2
- YG13 x8
- YC51 x2
- YC52 x2
- YG1 x2
- YE1 x2






-  x4
-  x4
-  x4
-  x4
-  x4
-  x1

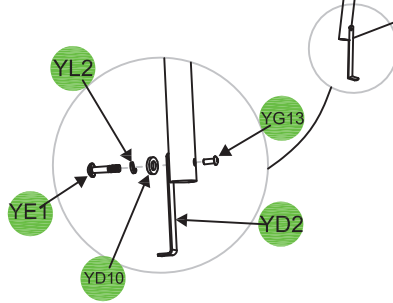
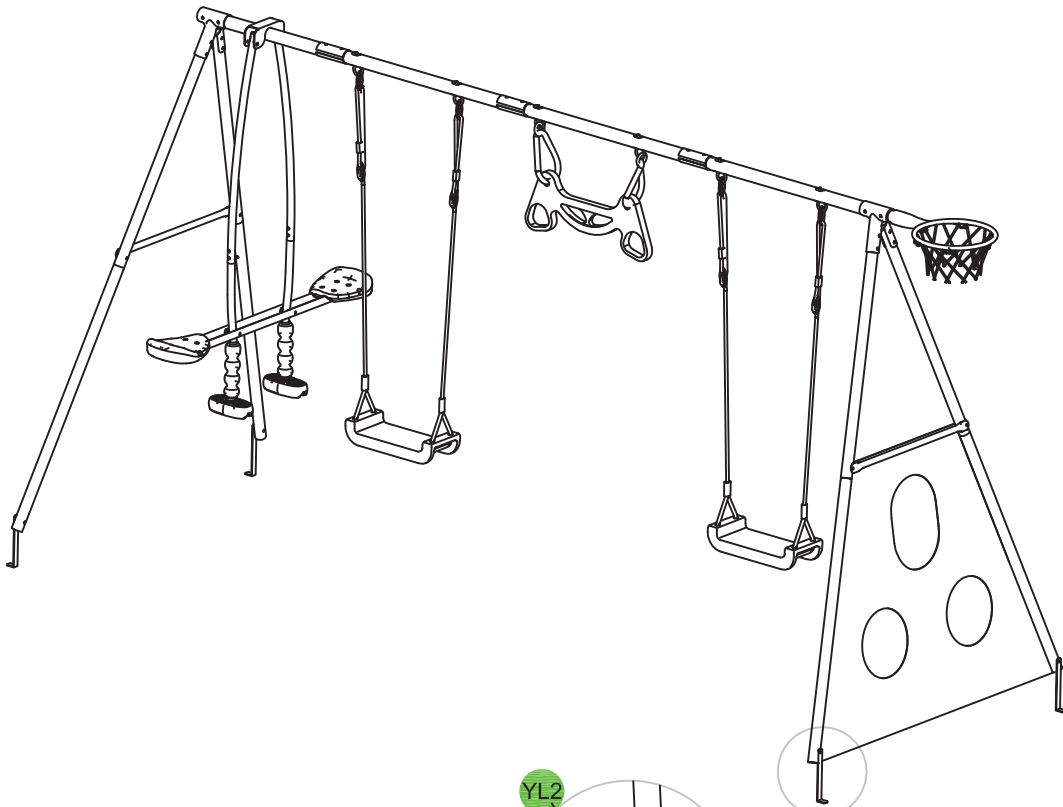


6

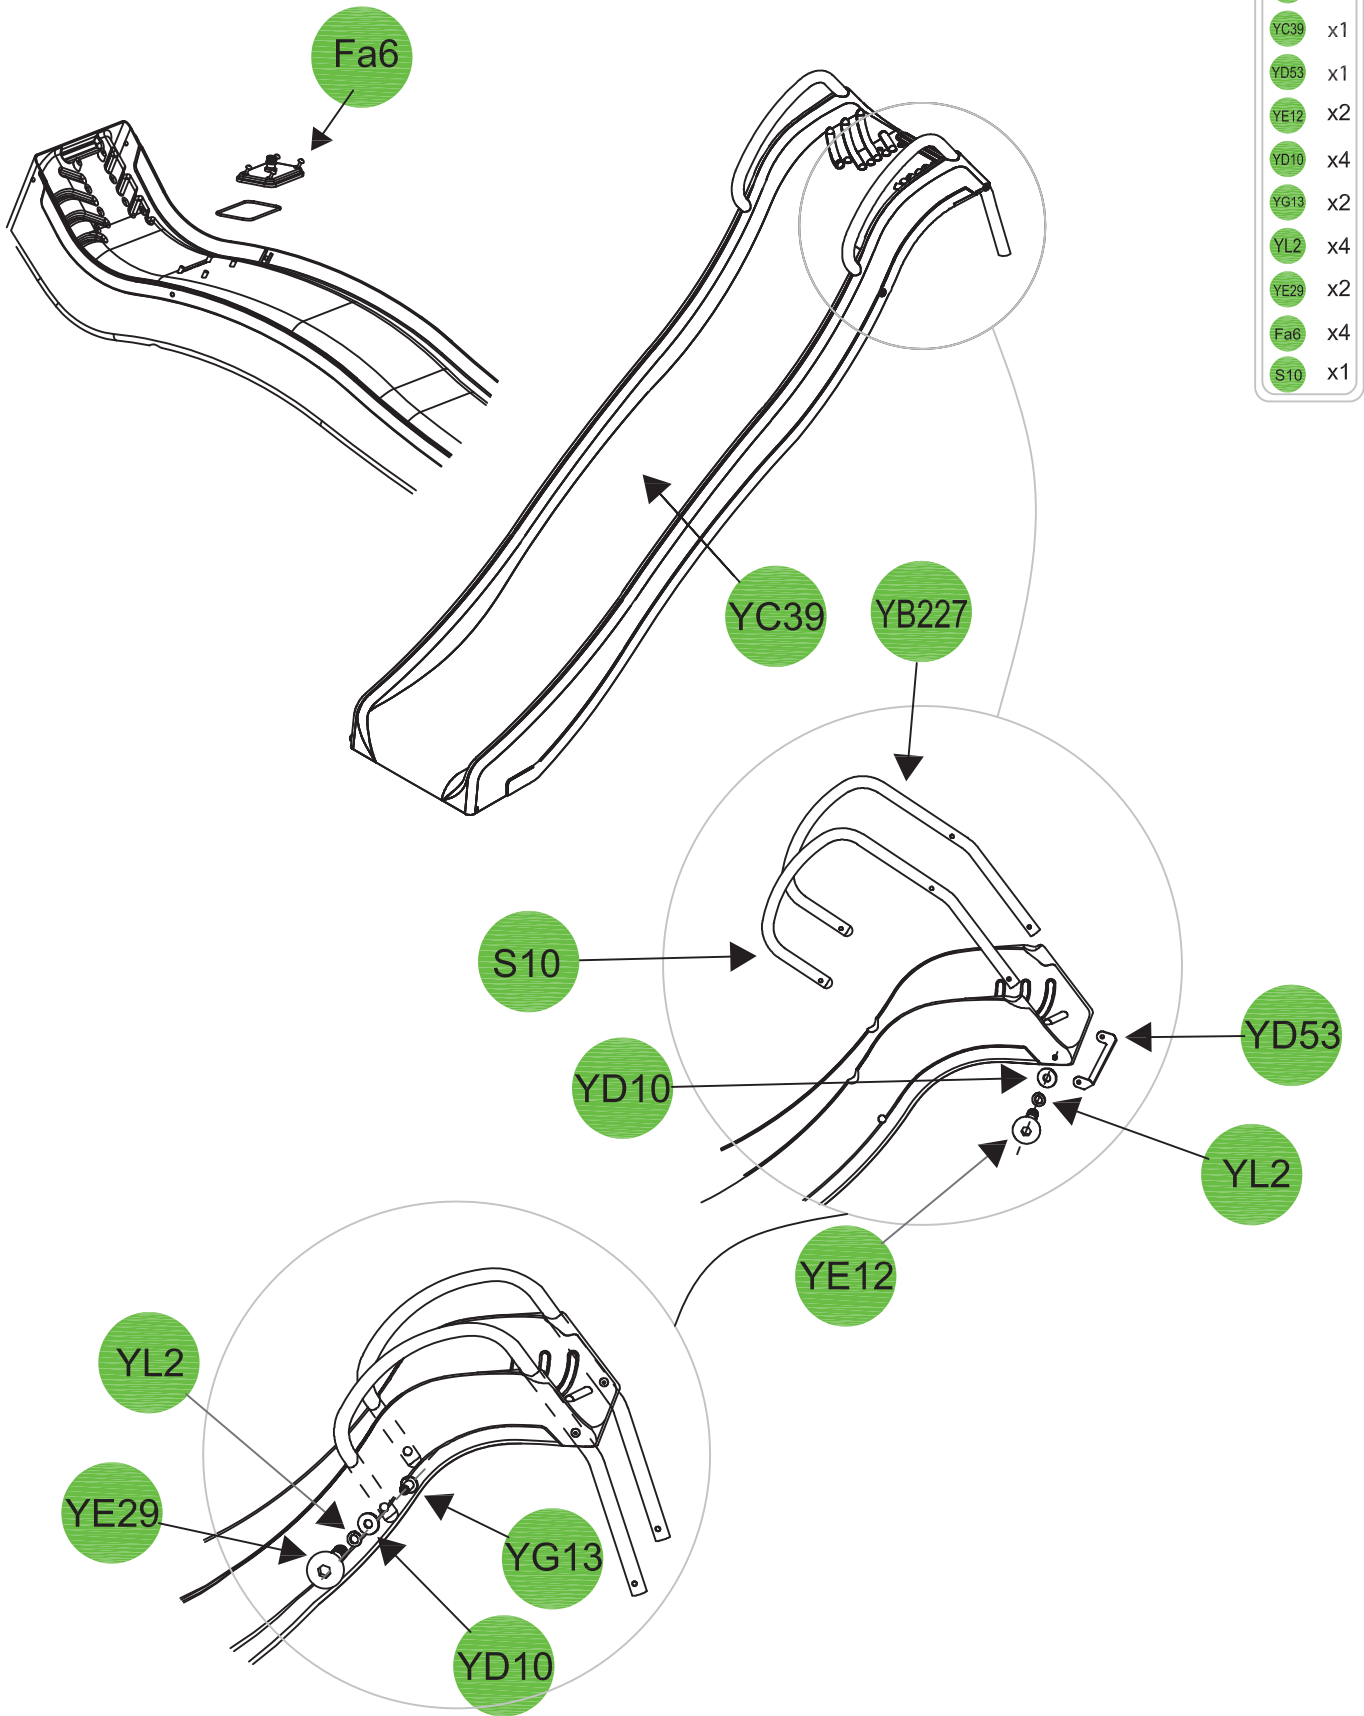


7

|       |    |
|-------|----|
| YB228 | x1 |
| YC27  | x1 |
| YG6   | x2 |
| YE9   | x2 |
| YL2   | x2 |
| YD10  | x2 |
| S11   | x1 |

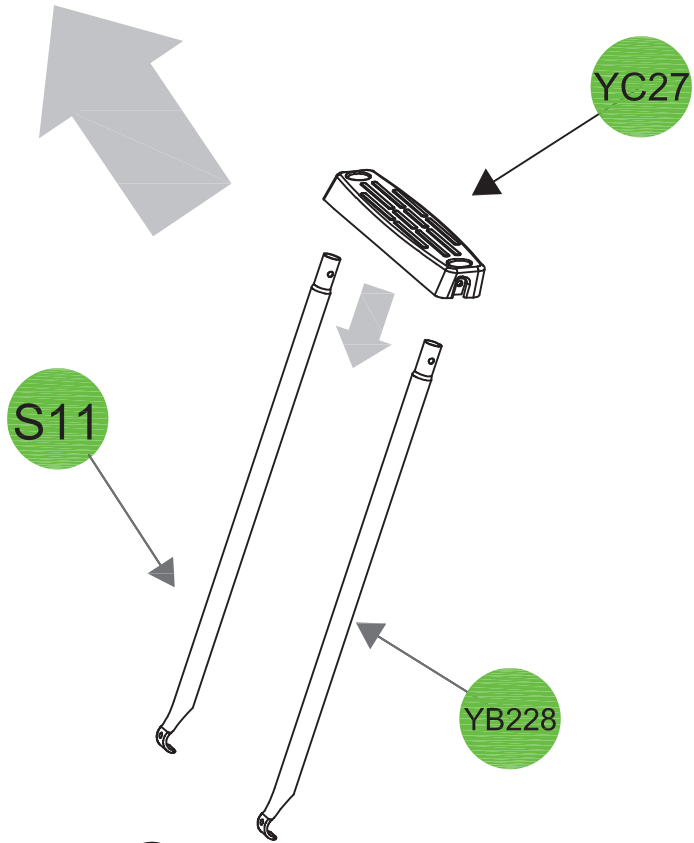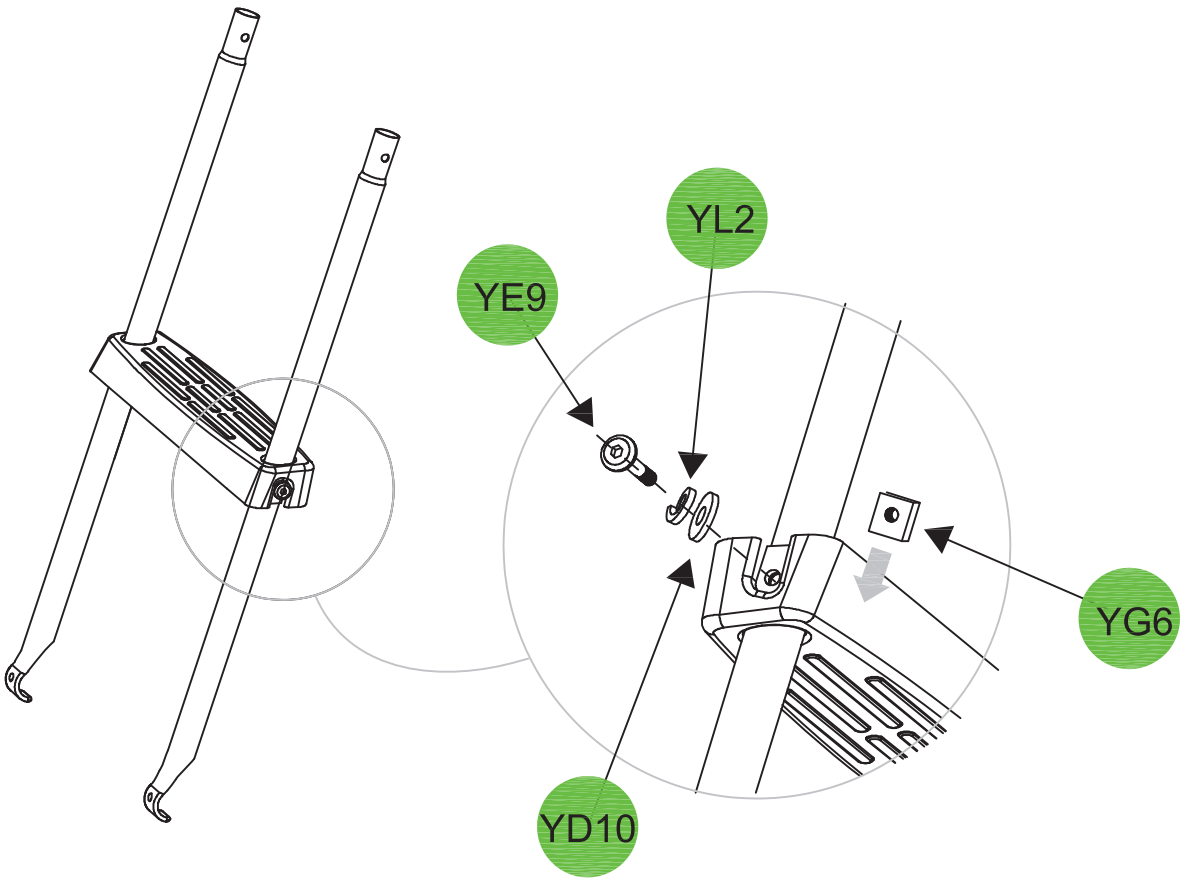


9

|      |    |
|------|----|
| YD10 | x2 |
| YC27 | x1 |
| YE9  | x2 |
| YG6  | x2 |
| YL2  | x2 |

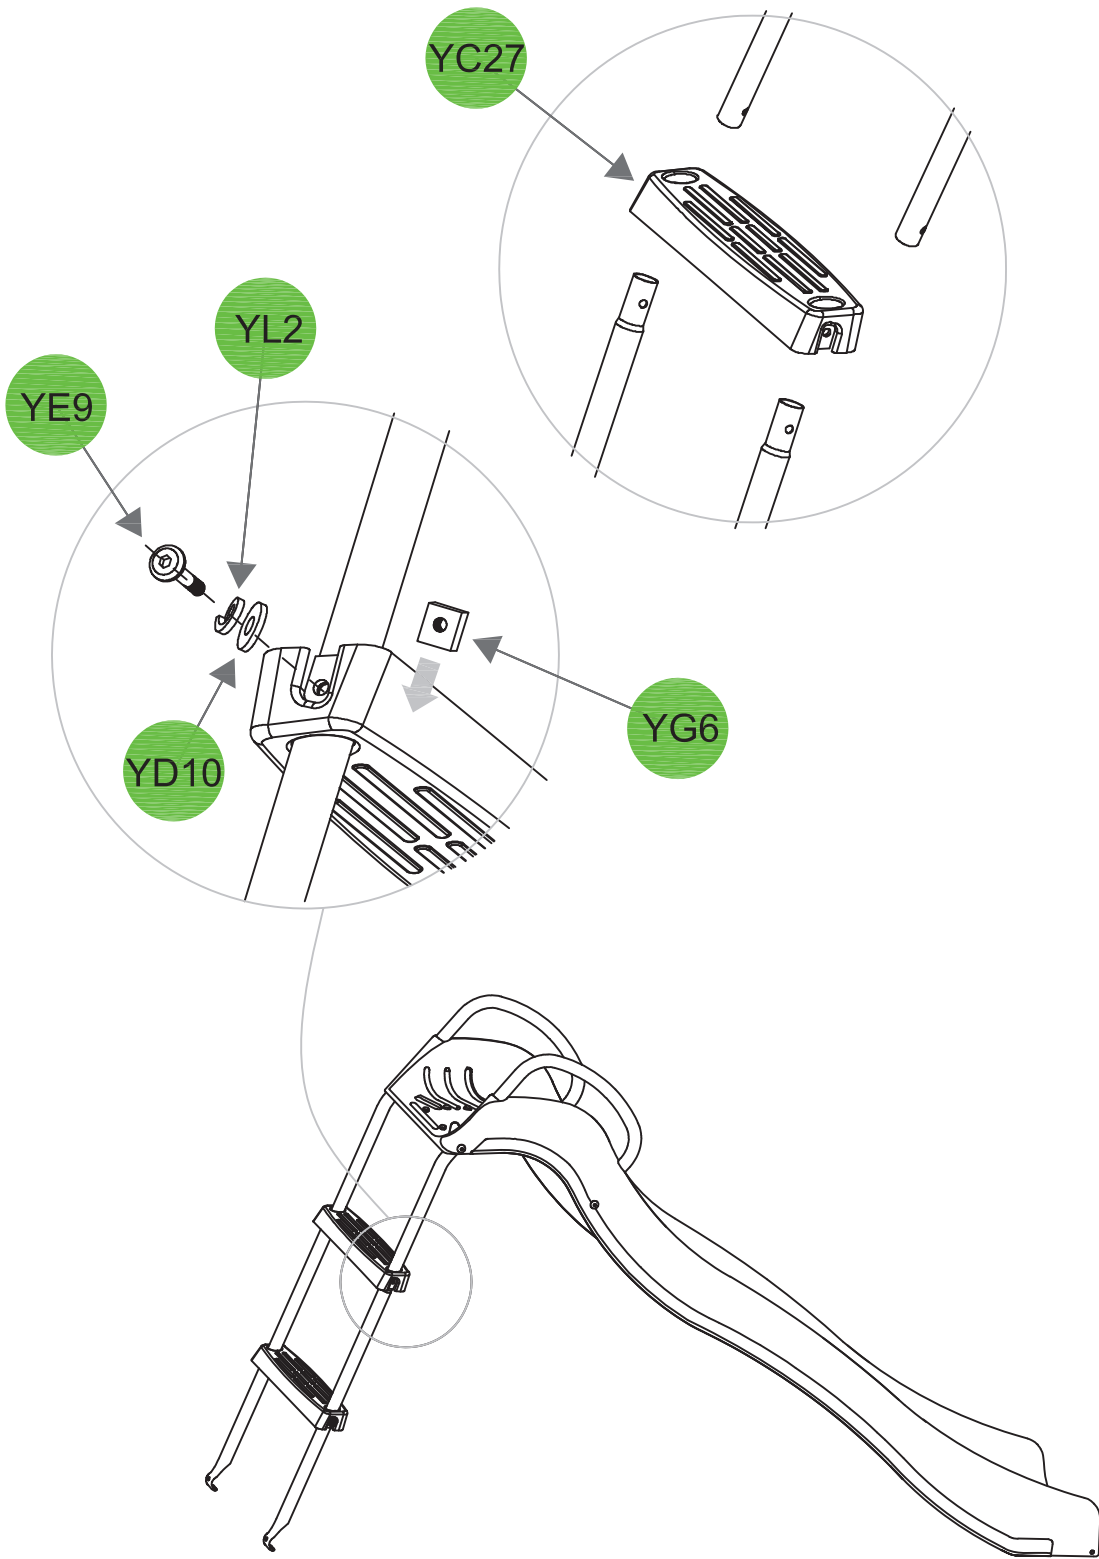


|       |    |
|-------|----|
| YB212 | x1 |
| YB209 | x1 |
| YE29  | x3 |
| YL2   | x3 |
| YD10  | x3 |
| YG13  | x3 |


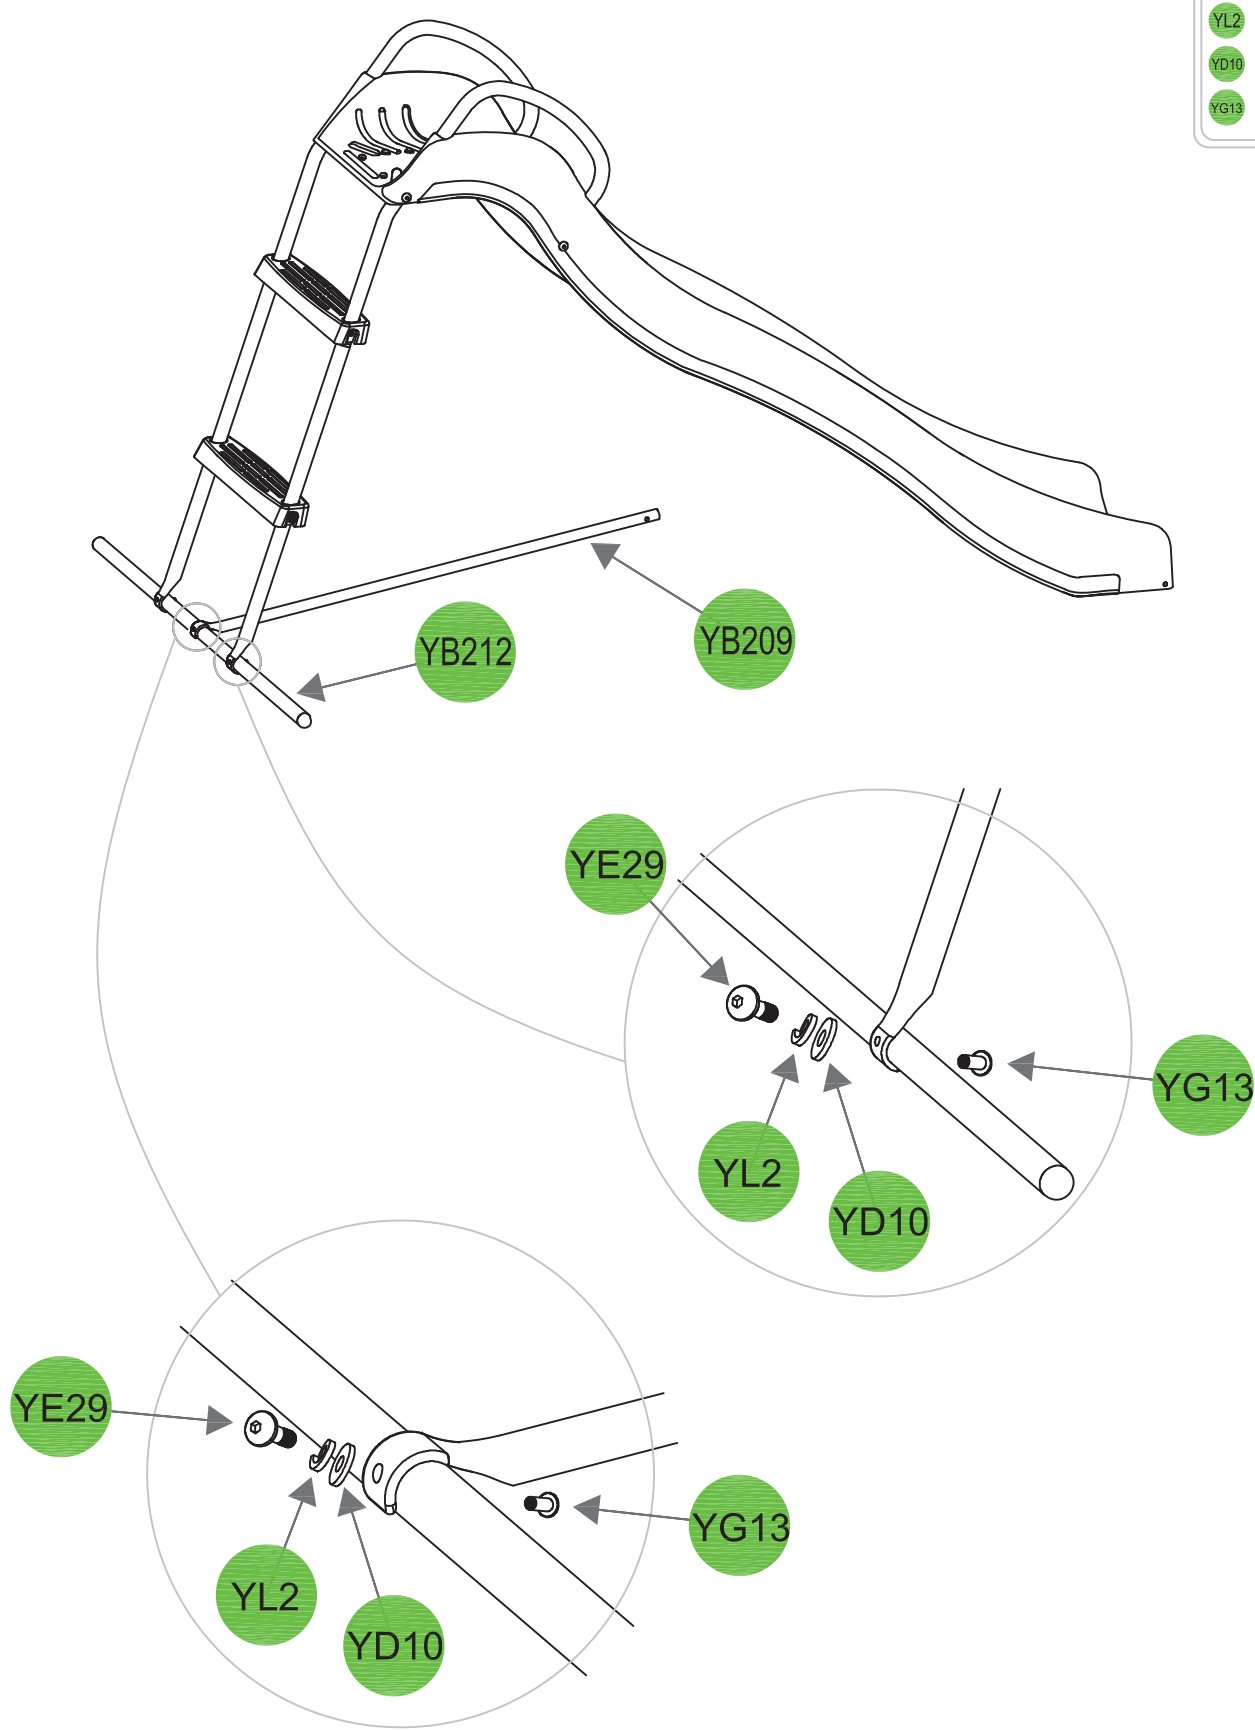






|       |    |
|-------|----|
| YB213 | x1 |
| YB47  | x1 |
| YE29  | x1 |
| YG13  | x1 |
| YL2   | x1 |
| YD10  | x1 |

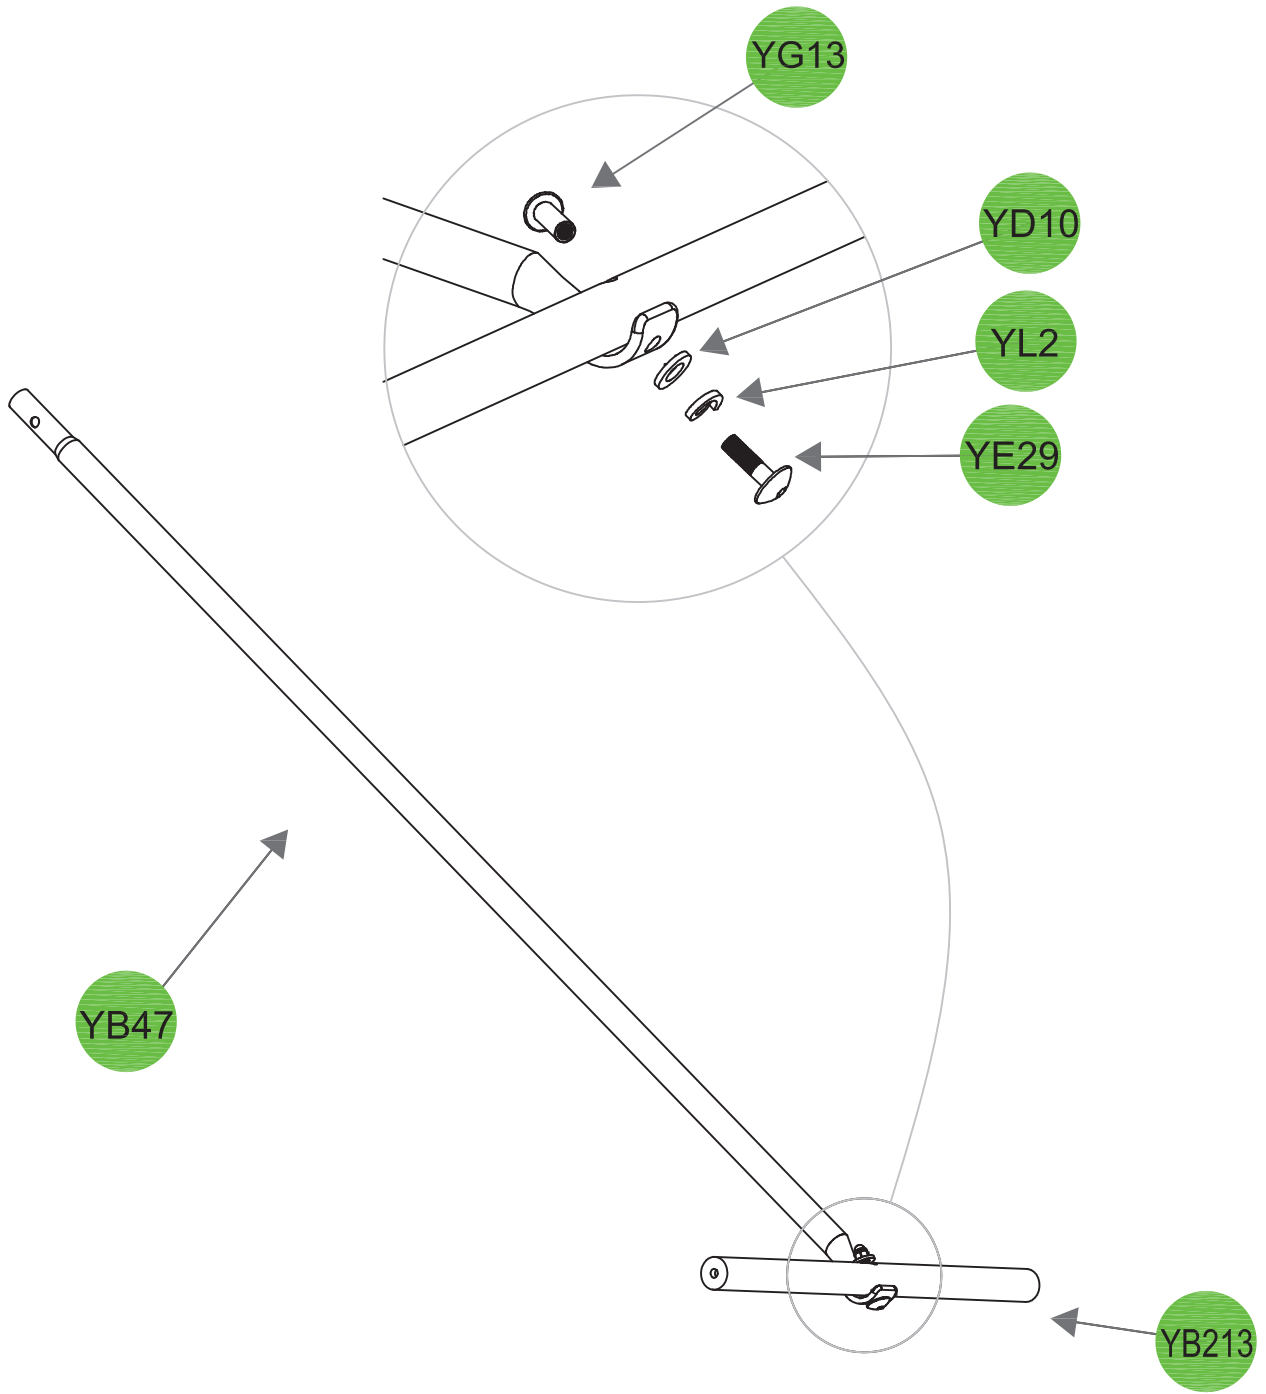


- YE19 x1
- YL1 x1
- YD11 x1
- YG13 x1

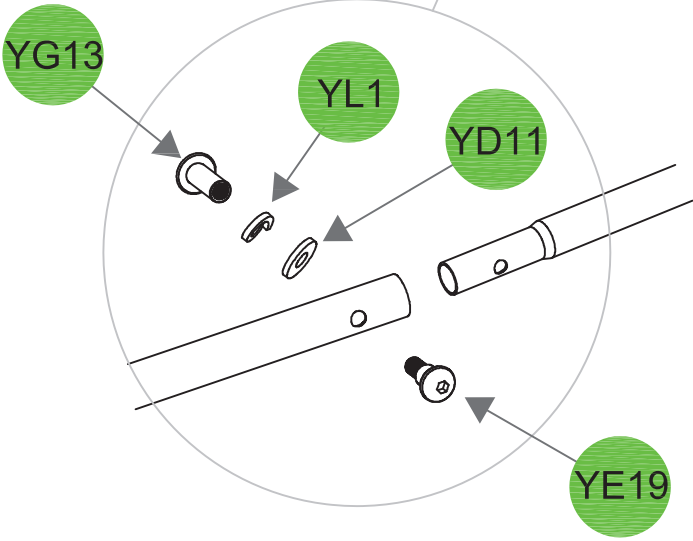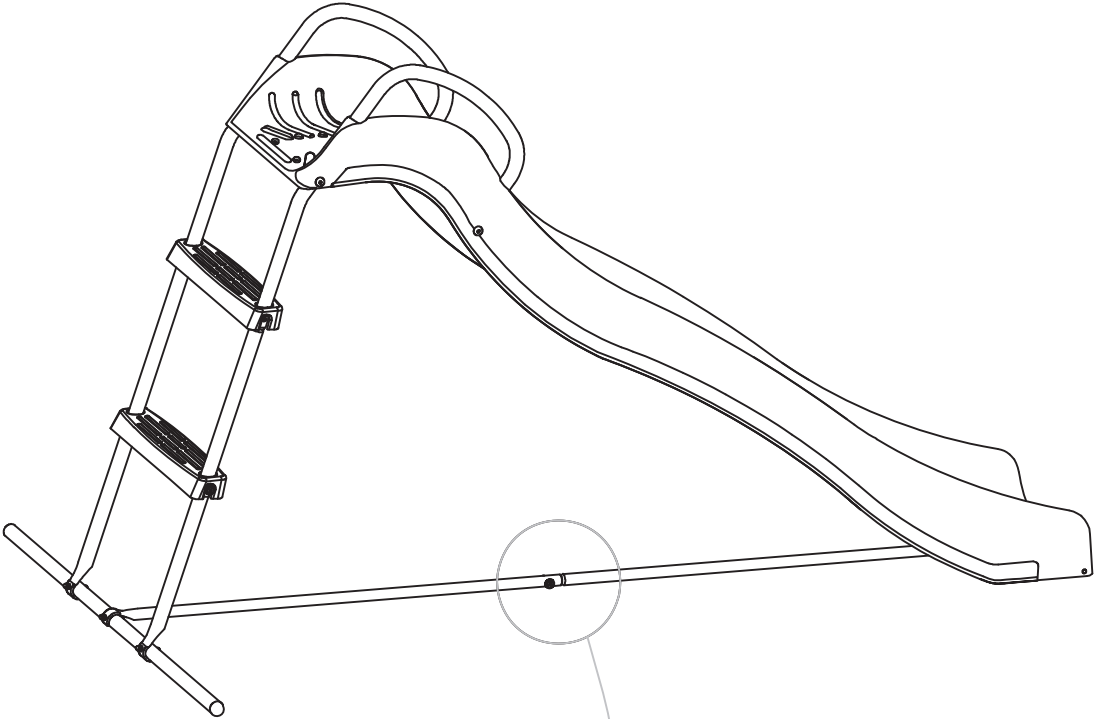


- YE19 x2
- YL2 x2
- YD10 x2

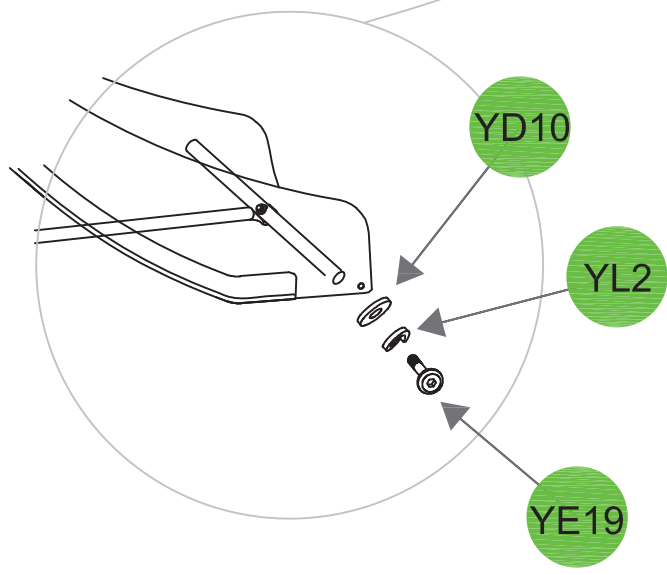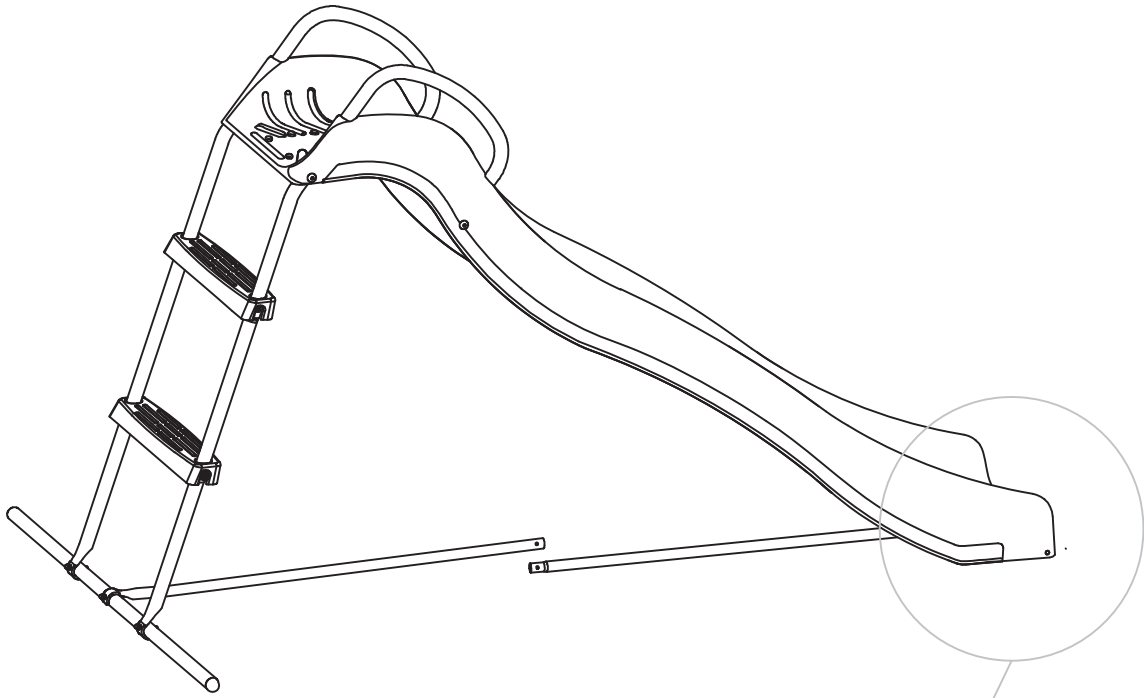

-  x2
-  x4
-  x4
-  x4
-  x2
-  x3
-  x2
-  x3

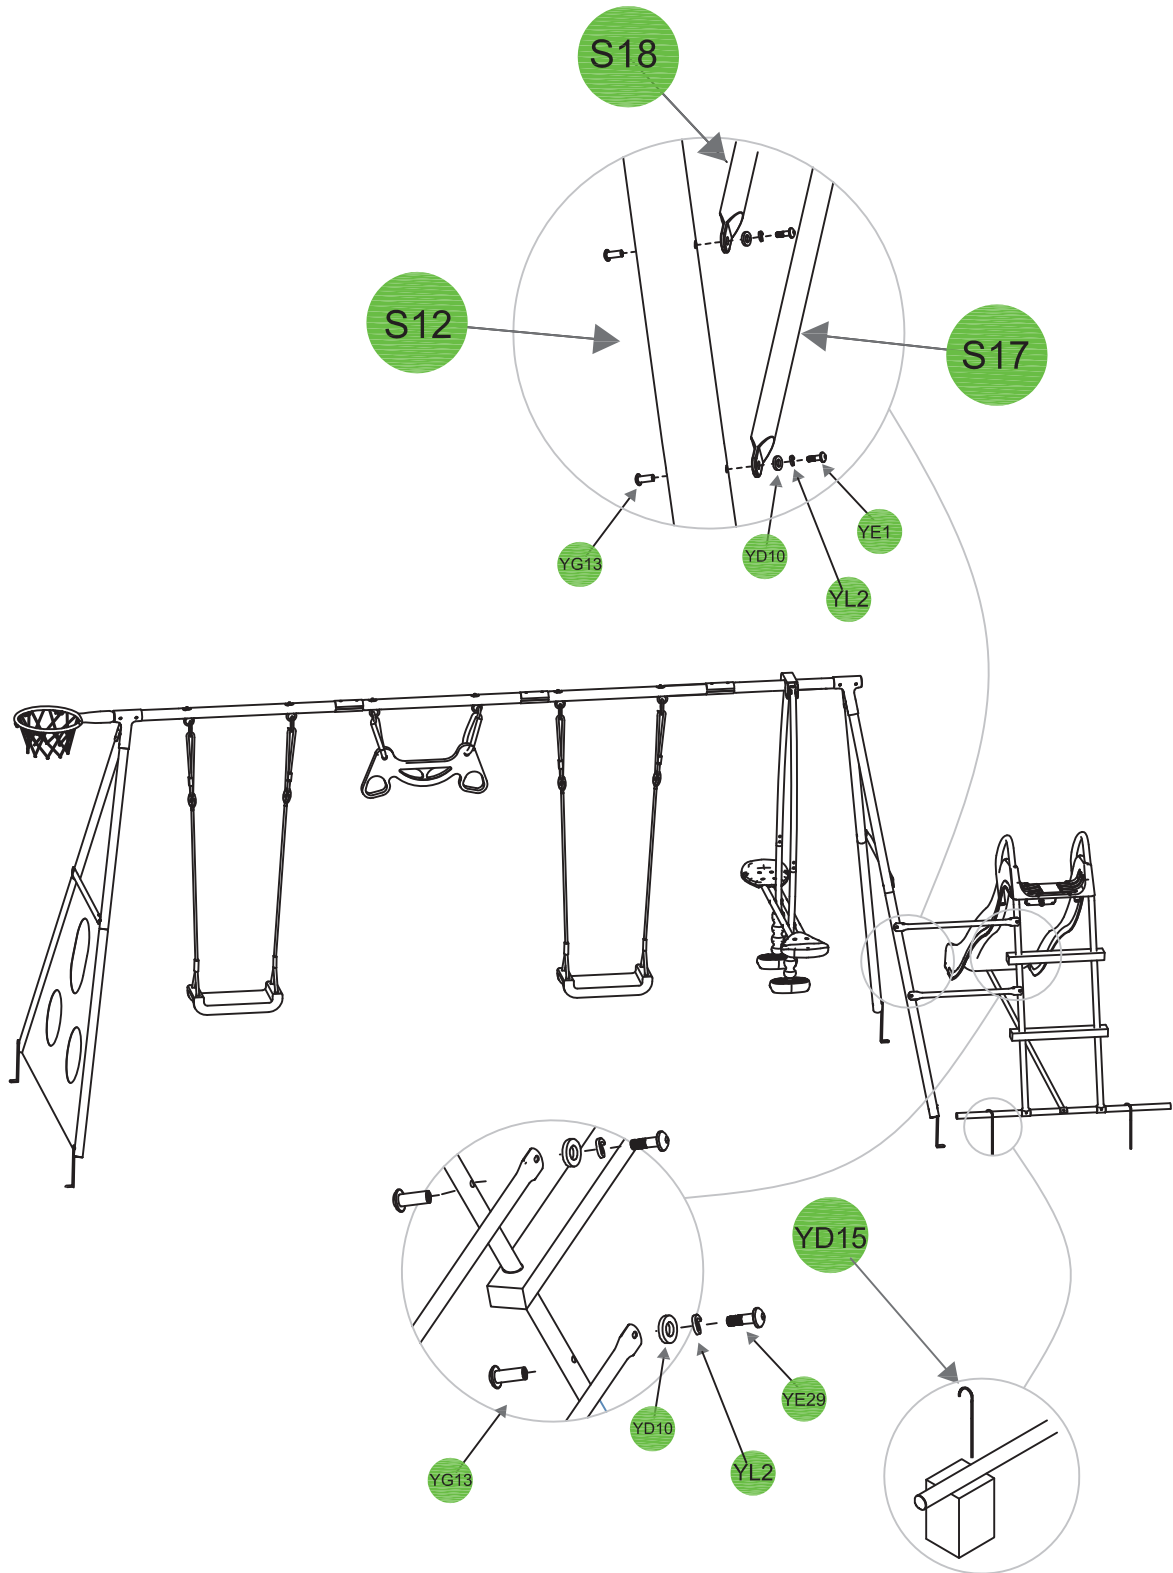

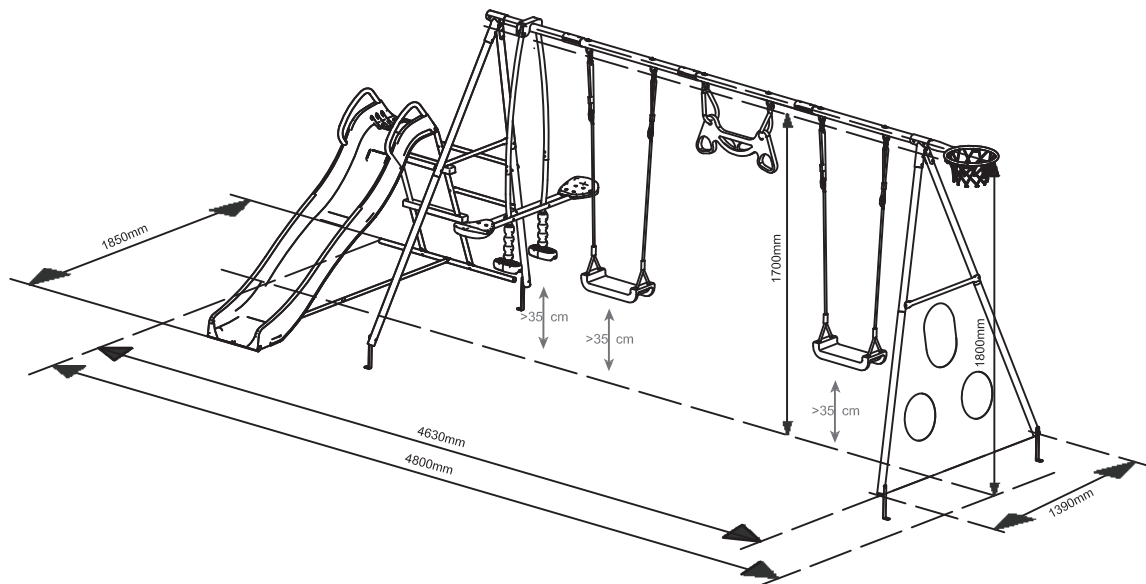

*Warning: Maximum fall heights is 170 cm*