



MIMOSA®


Installation Guide

Bentota Circle Chair

STEEL AND OLEFIN




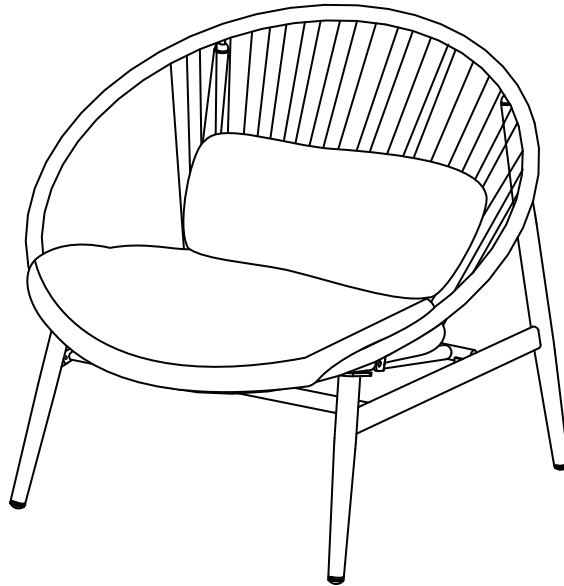


Wood Heat Transfer Finish






Assembly Instructions



Please carefully read the below warnings and instructions. Save the instructions for future reference.


- 1. Please carefully read all instructions before assembly and use**
- 2. Please separate and identify all parts, ensuring that you have all parts listed**
- 3. To avoid damaging your umbrella, it is recommended that you assemble it on a clean, protected surface**
- 4. Washers must be used when indicated during the assembly process**
- 5. Loosely tighten the nuts and then securely tighten when all are in position. Be careful not to over tighten the nuts during assembly.**

PARTS LIST		
CODE	PARTS	QTY.
1	 Seat	1PC
2	 Left Leg	1PC
3	 Right Leg	1PC
4	 Support tube	1PC
5	 Seat Cushion	1PC
6	 Back Cushion	1PC


HARDWARE LIST		
CODE	PARTS	QTY.
A	 M6x20mm	6PC
B	 M6x35mm	2PC
C	 Washer	8PC
D	 Allen Key	1PC
E	 Cap	8PC

Assembly Instructions


- 1 Plug left and right leg (2&3) in seat rim (1).

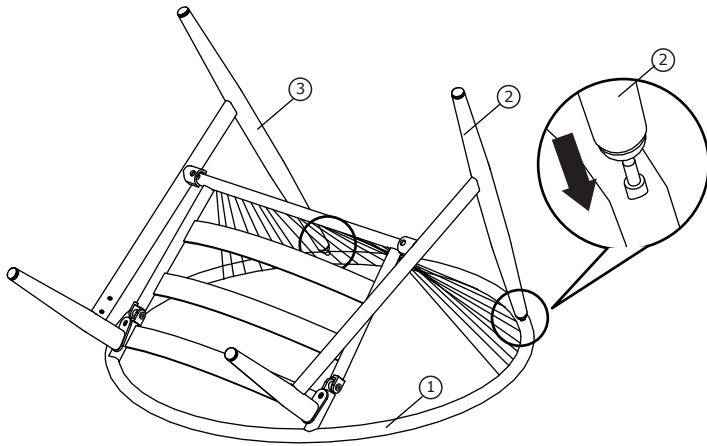


- 2 Secure left leg and right leg (2&3) to seat rim(1), using bolt (A&B) and washer (C), tighten to 80%. Until all bolts are in position, then tighten to 100%. cover caps (E).

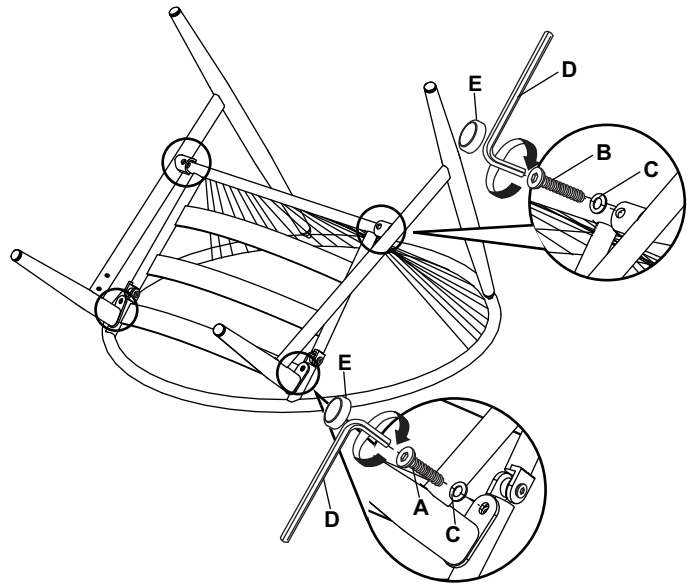

- 3 Secure support tube (4) to left and right leg as picture, using bolt (A) and washer (C). cover caps (E).

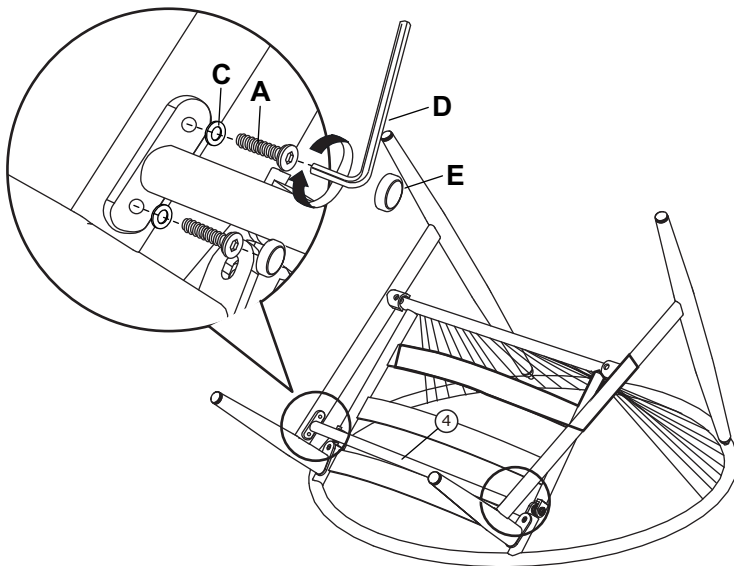

- 4 Place seat and back cushions on your chair and locate in desired position. If the surface is uneven, you can level the chair with the adjustable feet. Your chair is now ready for use.

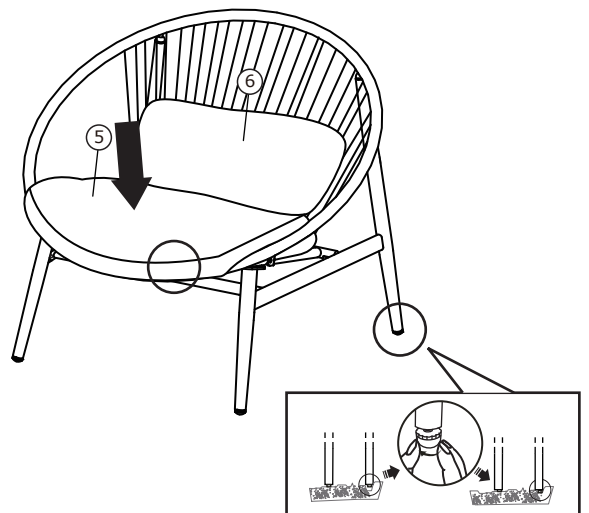

CARE AND CLEANING:

1. TO CLEAN, WIPE WITH DAMP CLOTH. DO NOT USE BLEACH, ACID SOLVENTS OR ABRASIVE CLEANERS ON FRAME PARTS.
2. DURING VARYING WEATHER CONDITIONS AND WINTER PERIOD, WE STRONGLY RECOMMEND THAT IT CAN BE STORED IN A DRY AREA WITH A SUITABLE COVER BEFORE STORAGE, PLEASE ENSURE IT IS CLEAN AND DRY BEFORE STORAGE.
3. IN THE EVENT OF BARE METAL SHOWING DUE TO SCRATCH, IT IS PREFERRED TO TREAT WITH A RUST REPELLING VARNISH OR SIMILAR.
4. PERIODICALLY CHECK AND ENSURE THAT ALL THE SCREWS ARE COMPLETELY TIGHTENED.
5. A PROTECTIVE WEATHER COVER IS ENCOURAGED TO PROLONG THE LIFESPAN OF YOUR LOUNGE.