



# CorePro LEDlinear MV

## CorePro LED linear R7S 118mm 7.2-60W 830

CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light that is just like a halogen lamp. Within the range, you can choose dimmable products which have deep a dimming function that enables a cosy ambience when using a dimmable fixture.

### Product data


General information		Warm-up time to 60% light (nom.)	
Cap base	R7S [ R7s]		0.5 s
EU RoHS compliant	Yes	Power factor (nom.)	0.5
Nominal lifetime (nom.)	15000 h	Voltage (Nom)	220-240 V
Switching cycle	8,000X		
	Sphere		
Light technical		Temperature	
Colour Code	830 [ CCT of 3,000 K]	T-Case maximum (nom.)	110 °C
Lamp Luminous Flux 25°C EL (Nom)	810 lm		
Colour Designation	White (WH)	Controls and dimming	
Colour Temperature, horizontal (Nom)	3000 K	Dimmable	No
Lamp Luminous Efficacy EM (Nom)	112.00 lm/W	Mechanical and housing	
Colour consistency	<6	Lamp Finish	Clear
Colour Rendering Index, horiz (Nom)	80	Bulb shape	Linear
LLMF at end of nominal lifetime (nom.)	70 %	Approval and application	
Operating and electrical		Energy Efficiency Class	E
Input frequency	50 to 60 Hz	Suitable for accent lighting	No
Power (Rated) (Nom)	7.2 W	Energy consumption kWh/1,000 hours	8 kWh
Lamp current (nom.)	40 mA		624213
Wattage equivalent	60 W	Product data	
Starting time (nom.)	0.5 s	Full product code	871951430397300
		Order product name	CorePro LED linear R7S 118mm 7.2-60W 830

# CorePro LEDlinear MV

EAN/UPC – product	8719514303973
Order code	929002495002
Local order code	R7SLED7.2WWG2
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10

SAP material	929002495002
Copy Net Weight (Piece)	0.016 kg



## Dimensional drawing

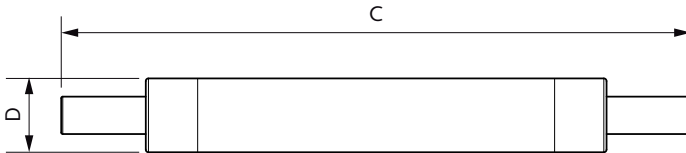

Product	D	C
CorePro LED linear R7S 118mm 7.2-60W 830	15 mm	118 mm


## CorePro LED linear R7S 118mm 7.2-60W 830

## Photometric data

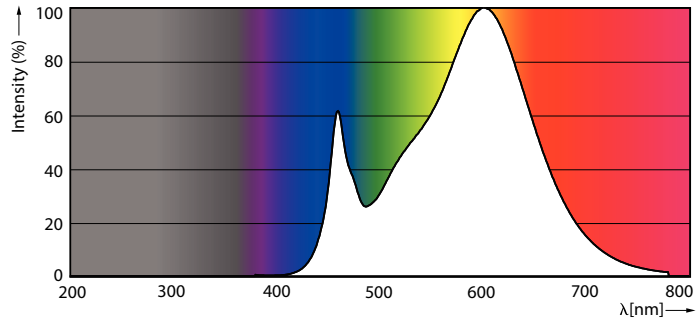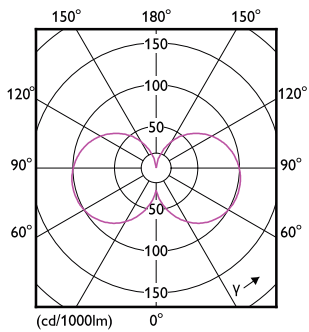

## LEDlinear CorePro 7,2W R7S 830-LDD



## LEDlinear CorePro 7,2W R7S 830-POC



## LEDlinear CorePro 7,2W R7S 830-GUL

# CorePro LEDlinear MV

## Lifetime

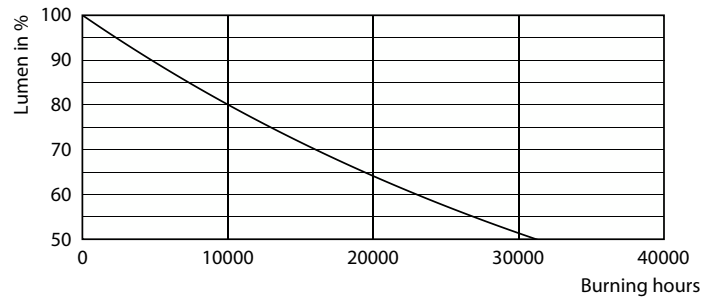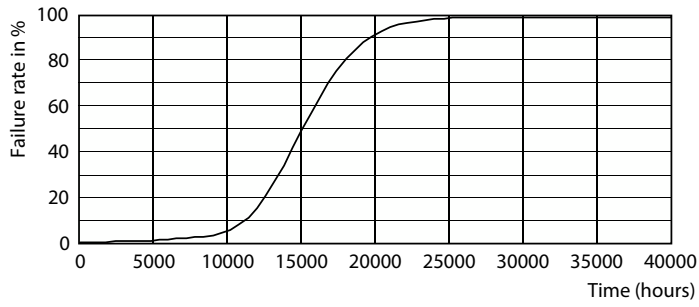

Life Expectancy Diagram

Lumen Maintenance Diagram

