



WAKAFLEX

TRUSTED ON AUSSIE HOMES SINCE 2001

**FLASH IT RIGHT
THE FIRST TIME**



- LEAD FREE ROOF FLASHING
- CHEMICALLY BONDS ON OVERLAPS
- 2 BUTYL ADHESIVE STRIPS
- INTERNAL ALUMINIUM MESH



SCAN FOR MORE INFORMATION

Including installation guidelines as well
as product and warranty information







TRUSTED ON AUSSIE HOMES SINCE 2001

Wakaflex is the professional choice for flashing abutments, chimneys, walls and other rising structures

Wakaflex is our premium lead free flashing. Made from an extruded Polymer rubber called Polyisobuthylene (PIB), Wakaflex has the unique ability to chemically bond to itself when overlapped. This creates one continuous waterproof seal for joins and step flashings. No other flashing material available today can provide this level of protection at roof/wall joints. Internally, Wakaflex contains an aluminium mesh that provides rigidity and a lasting memory when dressed to the roof surface. Wakaflex has two butyl sealing strips running along both edges of the roll, and a 3-piece HDPE protective backing. With a three-dimensional stretch (up to 50% in length and 15% in width), Wakaflex is designed to replace lead flashing in all its traditional applications and dresses down to any roofing material in a smooth seamless finish.

BEST FOR - New build applications such as abutments, step-flashing, chimneys and Dutch Gables.

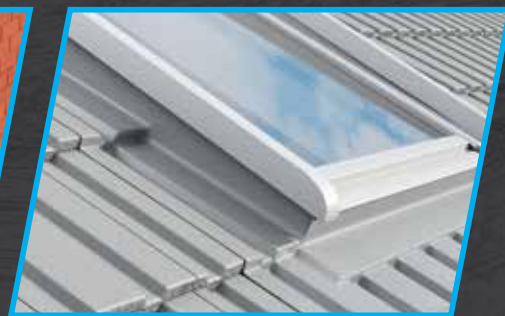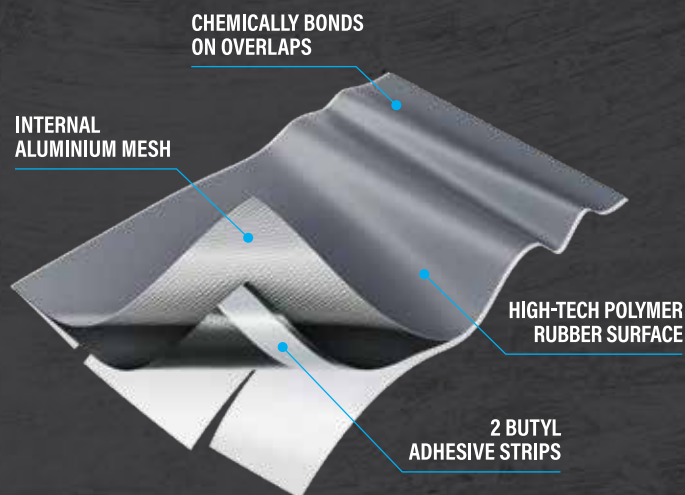


PRODUCT FEATURES

- Chemically bonds on overlaps
- 2 butyl adhesive strips
- Internal aluminium mesh
- BAL-29 approved - the highest of any lead free flashings
- Hi-tech polymer rubber surface

TECHNICAL INFORMATION


- Complies with AS/NZS 2904:1995 'Damp Proof Courses and Flashing'
- Complies with AS/NZS 4020:2005 'Testing of products for use in contact with drinking water'
- Easily installation with no specialist tools required
- Install in full 5m lengths with a 50mm overlap
- Compatible with most roofing materials
- Only to be used on a roof pitch of at least 12°
- Temperature stability - -40°C to 100°
- UV resistant in accordance with DIN 16726.
- Can be painted to match any building design

Colour/Width	Now available in 1m rolls			
	280mm x 1m	280mm x 5m	370mm x 5m	560mm x 5m
Lead Grey	●	●	●	●
Black	●	●	●	●
Terracotta	●	●	●	●
Brown		●		
New Colour Light Grey		●		




CHEMICALLY BONDS ON OVERLAPS

Wakaflex has the unique ability to chemically bond together when overlapped by 50mm. Instantly waterproof and fused permanently within minutes.



2 BUTYL ADHESIVE STRIPS

Two butyl strips run along each edge of the roll to ensure a watertight seal no matter what roofing material it's applied to.



INTERNAL ALUMINIUM MESH

Embedded inside each roll is an aluminium honeycomb mesh that provides a lasting profile of the roof and stops any lifting.



Distributed by Evo Building Products



02 9666 1069



info@evobuild.com.au



www.evobuild.com.au