



SpecRite™ 
Manufactured For Results.

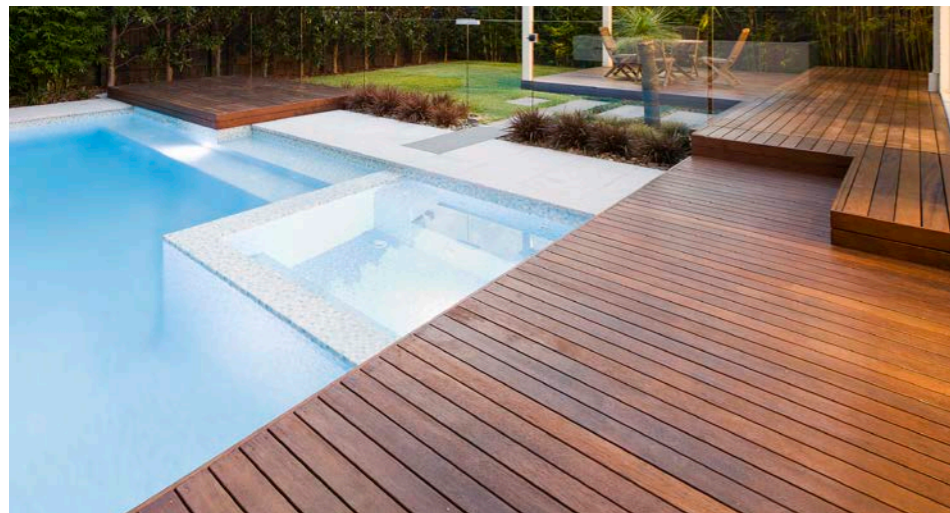

SpecRite Merbau Product Range

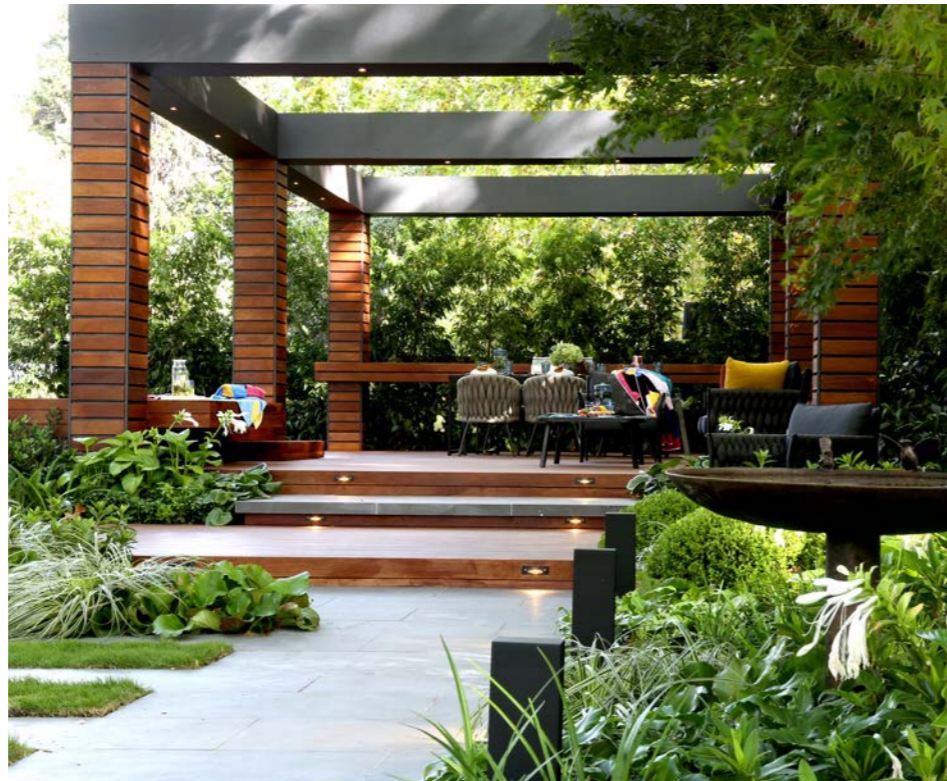

Why Choose SpecRite Merbau?

Built to Last

A deck is a long-term investment, so you want one that will stand the test of time. When it comes to decking, stability is everything.

Constant exposure to the elements can cause some timbers to warp, cup, or split over time. Merbau, however, is known for its exceptional stability and low dimensional movement, making it ideal for Australia's climate. Compared to other popular decking timbers, Merbau offers superior stability that comes with a lower risk of structural issues, keeping your deck beautiful and functional for years to come.

Merbau is also exceptionally durable, with a Class 1 above ground durability rating*, meaning it can last over 40 years with the right maintenance. Its natural resistance to rot, decay, termites, dry wood borers and fungi ensures superior performance compared to many other decking materials. And Merbau is BAL 29-rated, so it's suitable for use in bushfire-prone areas.


When properly installed and maintained, your merbau deck can remain sturdy, reliable, and beautiful for generations.

Pre-Oiled Protection

To ensure your deck starts strong, SpecRite Merbau comes pre-oiled with a Feast Watson® coating that's compatible with both oil- and water-based finishes.

This treatment helps seal the timber against moisture and UV exposure, providing an added layer of protection to all sides of your timber before you apply a final topcoat.

It's a smart way to set up your deck for a great finish.

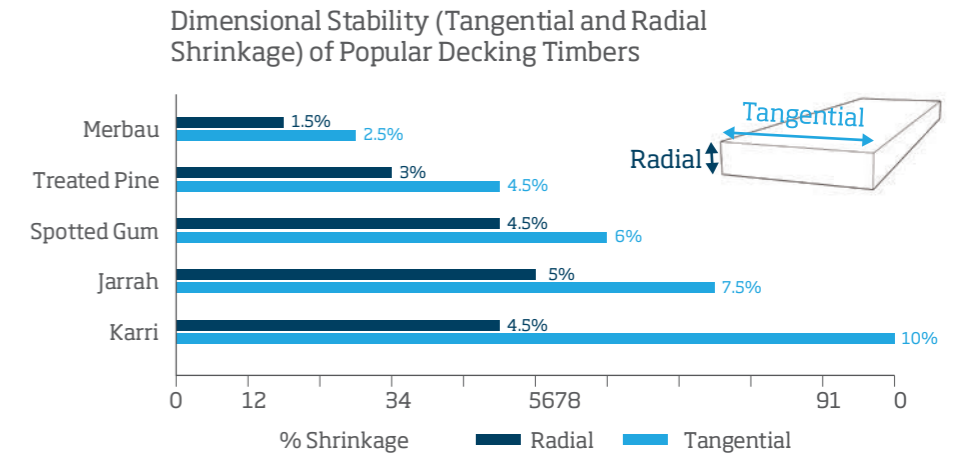

Sustainably Sourced

Choosing Merbau doesn't mean sacrificing sustainability.

SpecRite Merbau is FSC®-certified, supporting responsible forestry practices.

The Forest Stewardship Council (FSC) is a positive force for change that supports biodiversity and climate resilience.

When you choose FSC-certified products, you're helping to take care of forests for future generations.

FSC certification requires periodic review and you can check the FSC status of our SpecRite Merbau supplier at any time:

info.fsc.org
Certification No: SCS-COC-005449



The mark of responsible forestry

Naturally Versatile

One of timber's greatest strengths is its versatility - and with Merbau, the possibilities are endless. Our range of Merbau products includes decking, screening, garden edging and structural GL17 posts and beams.

Unlike composite alternatives that expand and contract across the length of the board, Merbau expands and contracts across its width, meaning fully flexible design possibilities without needing to incorporate breaker boards every few metres.

Tried and Tested

Merbau has been a trusted timber decking choice for generations of Aussies. It's a tried and tested material that remains popular for its strength, beauty and longevity.

Merbau doesn't cause static shock or overheat like some alternative decking materials.

With its warm, rich tones, Merbau continues to captivate homeowners and designers alike - providing a stylish, naturally sophisticated look that's hard to beat.

* Source: Australian Standard 5604-2005 Timber - Natural Durability Ratings

SpecRite Pre-Oiled Decking

The start of a great finish



- > **Helps save time on installation**
- > **Already primed for topcoating**
- > **Protects from moisture and UV during installation**
- > **Base level protection for the underside of the deck**
- > **Further improves stability**
- > **Helps deliver a premium finish**

Why Choose Pre-Oiled Decking?

When laying a deck, it's common to lay the raw timber, allow it to weather and then apply decking oil. This method works well in protecting the deck from UV after installation, but the process can result in dark, unsightly blotches where tannins in the timber have reacted to trace metals, for example, from muddy work boots during the build, or from the water supply when hosing down the timber to flush away excess tannins before the deck has been sealed.

The underside of the deck is rarely exposed to UV, but it is exposed to moisture, particularly if the deck is exposed to the elements. Excess moisture build-up from inadequate ventilation or drainage underneath the deck can affect the stability of the timber and cause unsightly bowing and cupping and can even impact the structural integrity of the subframe.

SpecRite's pre-oiled decking products have been primed with Feast Watson® Industrial Timber Oil, which can be topcoated with most water-based and oil-based finishes. A single coat has been applied to all four sides and is designed to help seal and protect your timber from moisture, dirt and UV exposure prior to final topcoating.

Which Topcoat Should I Choose?

When choosing a topcoat, the most suitable product is best determined by your preferred look and feel.

To maintain or highlight the natural appearance of your timber, a transparent, lightly pigmented oil is recommended such as Feast Watson® Traditional Timber Oil. For longer lasting protection, a high-end water based product such as Intergrain® UltraDeck Timber Oil can be used. To transform the colour of the timber, a semi-transparent stain such as Intergrain® UltraDeck Timber Stain will impart a deeper colour while allowing the timber grain to show through.

To ensure you are completely satisfied with your chosen coating and colour, we recommend you first test the coating on a small inconspicuous area.

Timber will naturally grey off if left unfinished.

Maintenance

Refer to your chosen topcoat label for product specific maintenance information. We recommend regularly monitoring the coated timber for signs of colour loss, dryness and weathering. Recoat the timber when it begins to show signs of dryness to help maintain its natural beauty and protection.

When required, clean the surface using a timber cleaner, allow the surface to dry and recoat with one coat of the original coating, following label instructions. For a longer lasting finish, apply a second coat.

Topcoating Your Deck

Step 1

Prepare for topcoating.

Ensure the decking surface is clean. If required, thoroughly scrub with Feast Watson® Woodprep.

A high strength timber cleaner can remove dirt, grease, excess tannins and other contaminants to optimise topcoat performance.

Step 2

Choose your topcoat.

Our pre-oiled decking can be topcoated with most water-based or oil-based finishes.

To maintain or highlight the natural appearance of your timber, a transparent, lightly pigmented oil-based product is recommended. For longer lasting protection, apply a high-end water-based finish.

Step 3

Apply your topcoat.

Allow the timber to dry and apply two coats of your chosen finish following label instructions.

Make sure your deck has dried fully before replacing furniture.

Sit back and relax.



PRE-OILED WITH


FEAST WATSON®
ESTD 1922
PROFESSIONAL TIMBER FINISHES

READY FOR FINISHING ONSITE


Our **Pre-Oiled Decking** Range




Merbau Solid Decking
Random Lengths

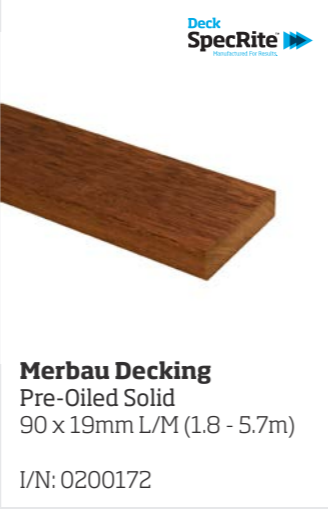


Merbau Decking
Pre-Oiled Solid
90 x 19mm L/M (1.8 - 5.7m)
I/N: 0200172

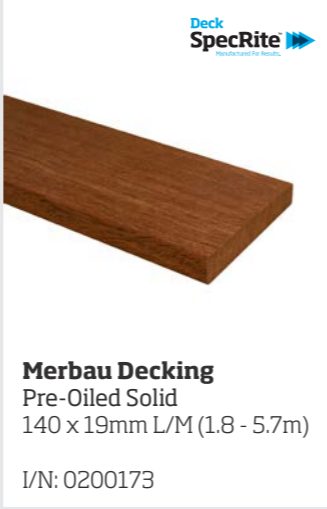

Merbau Decking
Pre-Oiled Solid
140 x 19mm L/M (1.8 - 5.7m)
I/N: 0200173

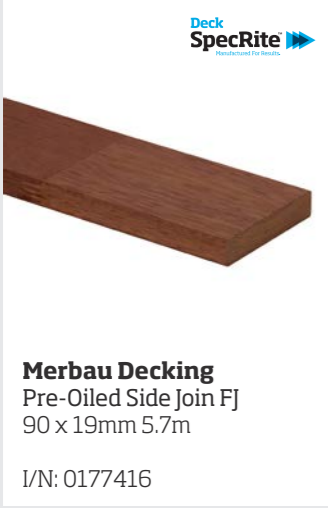

Merbau Decking
Pre-Oiled Side Join FJ
90 x 19mm 5.7m
I/N: 0177416

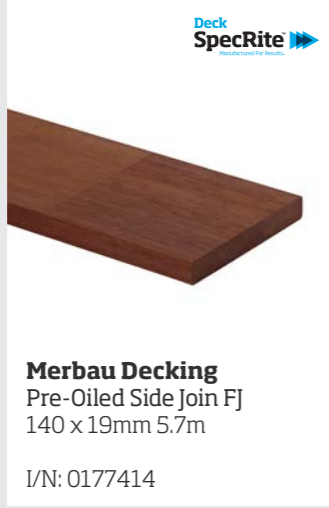


Merbau Decking
Pre-Oiled Side Join FJ
140 x 19mm 5.7m
I/N: 0177414




Merbau Side Join FJ Decking
5.7m Set Lengths



Merbau Face Join FJ Decking
2.25m Bundles

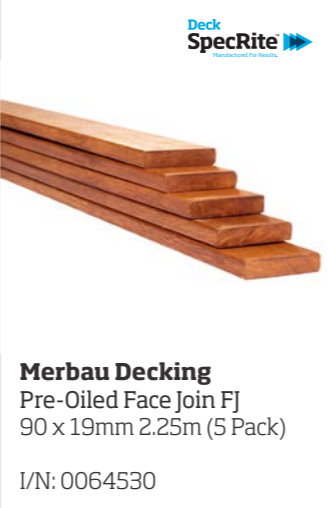


Merbau Decking
Pre-Oiled Face Join FJ
90 x 19mm 2.25m (5 Pack)
I/N: 0064530

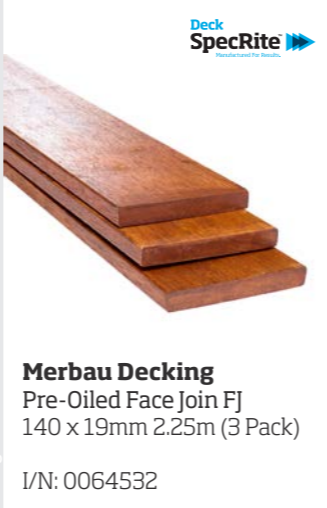


Merbau Decking
Pre-Oiled Face Join FJ
140 x 19mm 2.25m (3 Pack)
I/N: 0064532

Our Heavy Hopea offers a unique solution for your next decking project. The strong and stable timber comes in beautiful honey-oak tones and its fine texture and grain make it easy to work with.


Heavy Hopea's natural durability and strength make it ideal for external applications.

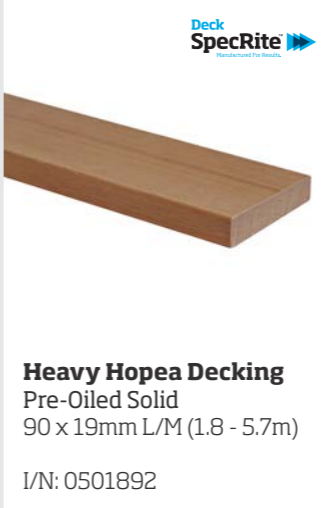

Heavy Hopea Decking
Pre-Oiled Solid
90 x 19mm L/M (1.8 - 5.7m)
I/N: 0501892

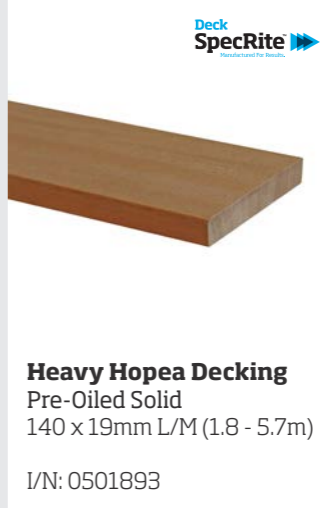

Heavy Hopea Decking
Pre-Oiled Solid
140 x 19mm L/M (1.8 - 5.7m)
I/N: 0501893

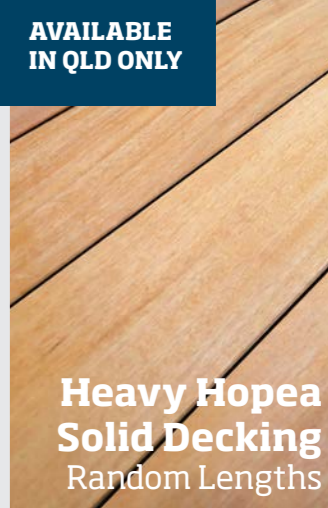

AVAILABLE IN QLD ONLY

Heavy Hopea Solid Decking
Random Lengths



More Products in the SpecRite Merbau Range



Find out more
Scan the QR code to see the full range of SpecRite products, as well as helpful articles and FAQs, or visit:
specrite.com.au



Screening
Pre-Oiled Solid Merbau
42 x 42mm 2.7m
I/N: 0517074

Screening
Pre-Oiled Solid Merbau
42 x 19mm 2.7m
I/N: 0517078

Vertical Slat Gate
Pre-Oiled FJ Merbau
1800 x 900 x 30mm
I/N: 8500233


Horizontal Slat Gate
Pre-Oiled FJ Merbau
1833 x 900 x 30mm
I/N: 8500232

Garden Fence Panel
Pre-Oiled FJ Merbau
1800 x 600 x 33mm
I/N: 8500298

Alternated Fence Panel
Pre-Oiled FJ Merbau
1800 x 902 x 30mm
I/N: 8500281

Screening
Pre-Oiled Solid Merbau
70 x 19mm 2.7m
I/N: 0517075

Fence Pickets
Pre-Oiled Solid Merbau
70 x 19mm 0.9/1.2/1.5/1.8m
I/N: 0019534/5/6/7

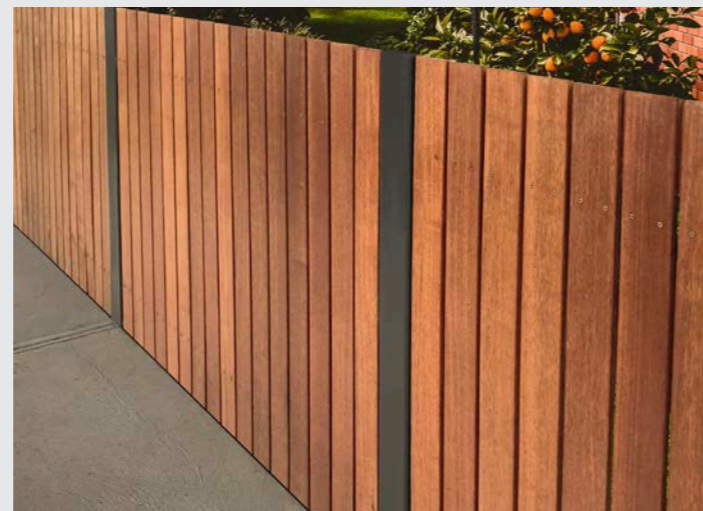

1200mm Multi-Use
FJ Merbau Panel
405/600 x 18mm
I/N: 8330195/8330196

1800mm Multi-Use
FJ Merbau Panel
600 x 18mm
I/N: 0421658

2200mm Multi-Use
FJ Merbau Panel
600 x 26mm
I/N: 8330163



Garden Border Roll
Pre-Oiled Tapered Merbau
200 / 300 x 18mm 2m
I/N: 3321641 / 1077537

Garden Edging
Non-Oiled FJ Merbau
69 x 7mm 5.7m
I/N: 0064274 (VIC only)

F27 KD DAR
Pre-Oiled Solid Merbau
200 x 50mm 2.4m
I/N: 0575945

2400mm Multi-Use
FJ Merbau Panel
900 x 33mm
I/N: 0421659

600mm Multi-Use
FJ Round Merbau Panel
600 x 600 x 18mm
I/N: 0421657

GL17 Posts
Pre-Oiled Merbau
Various Sizes
See overleaf for options

GL17 Beams
Pre-Oiled Merbau
Various Sizes
See overleaf for options

SpecRite Merbau GL17

Structural Posts and Beams



Our new SpecRite GL17 Merbau posts come with all the features and benefits of Merbau, with the added benefit of solid pieces of no-join Merbau on two sides, creating an attractive, robust and straight product that can be used in structural and aesthetic applications specified to GL17 or lower.

Applications

Our GL17 Merbau posts and beams can be used in both indoor and outdoor applications including pergola posts and beams, roof beams, garage openings and handrails.

Structural Integrity

SpecRite GL17 Merbau posts and beams have been certified to AS1328 and are backed by GLTAA (Glue Laminated Timber Association of Australia) approval.



Scan the QR code to download the GL17 Merbau Posts and Beams Product Information, Warranty and Design Guide.

See the table below to find out which products are available in your state.



GL17 Availability by State: ● Available in store* ● Special Order** ● Not Available

PROFILE	LENGTH	ITEM NO.	ACT	NSW	NT	QLD	SA	TAS	VIC	WA
90 x 90mm	2.4m	0549667	●	●	●	●	●	●	●	●
	2.7m	0549671	●	●	●	●	●	●	●	●
	3.0m	0549662	●	●	●	●	●	●	●	●
	3.6m	0549668	●	●	●	●	●	●	●	●
	4.8m	0549677	●	●	●	●	●	●	●	●
	5.4m	0549659	●	●	●	●	●	●	●	●
100 x 100mm	3.6m	0746021	●	●	●	●	●	●	●	
115 x 115mm	2.4m	0549656	●	●	●	●	●	●	●	●
	2.7m	0549674	●	●	●	●	●	●	●	●
	3.0m	0549660	●	●	●	●	●	●	●	●
	3.6m	0549664	●	●	●	●	●	●	●	●
	5.4m	0746019	●	●	●	●	●	●	●	●
120 x 120mm	2.4m	0549675	●	●	●	●	●	●	●	●
	2.7m	0549663	●	●	●	●	●	●	●	●
	3.0m	0549680	●	●	●	●	●	●	●	●
	3.6m	0549655	●	●	●	●	●	●	●	●
140 x 140mm	2.4m	0549673	●	●	●	●	●	●	●	●
	2.7m	0549665	●	●	●	●	●	●	●	●
	3.0m	0549669	●	●	●	●	●	●	●	●
	3.6m	0549679	●	●	●	●	●	●	●	●
	5.4m	0746020	●	●	●	●	●	●	●	●
90 x 42mm	5.4m	0549670	●	●	●	●	●	●	●	
140 x 42mm	5.4m	0549658	●	●	●	●	●	●	●	



Scan the QR code for the full range of SpecRite products, helpful articles and FAQs, or visit:

specrite.com.au



The mark of responsible forestry

FSC certification requires periodic review and you can check the FSC status of our SpecRite Merbau and Heavy Hopea supplier at any time:

info.fsc.org
Certification No: SCS-COC-005449

SpecRite™ 
Manufactured For Results.