

XGT



Makita[®]

XGT 40V | 80V MAX
PRODUCT GUIDE 2024



XGT X2
80V max

Two batteries mean more power! Makita-built brushless motors, along with **two 40V Max XGT batteries**, deliver the power and performance required for heavy-load applications. By using two 40V Max XGT batteries, you get 80V Max of power within one system. The increased power and performance allow XGT cordless equipment and tools to rival corded tools and petrol equipment.



CONTENTS

Batteries, Chargers & Adaptor	4-7	Cooler & Warmer	38
Hammer Driver Drill & Driver Drill	8	Microwave	39
Impact Driver	9	Kettle	40
Impact Wrench	10-12	Inflator	40
Brad & Pin Nailer	13	Air Compressor	40
Angle Grinder	14-16	Jobsite Radio / Radio Lantern	41-42
Slide Compound Saw	17	Dust Blower	42
Plunge Cut Saw	18	Charging Adaptor	42
Circular Saw	19-20	Worklight, Flashlight & Torch	43-45
Rear Handle Saw	21	Concrete Vibrator	46
Recipro Saw	22	Mixing Drill	46
Jigsaw	22	Earth Auger	47
Laminate Trimmer	23	Pressure Washer	47
Planer	23	Mist Blower / Blower	48
Metal Cut Saw	24	Lawn Scarifier	49
Bandsaw	24	Lawn Mower	50-51
Power Cut	25	Brushcutter / Line Trimmer	52-55
Rotary Hammer	26-29	Chainsaw / Pole Saw	56-57
Demolition Hammer	30	Hedge Trimmer	58-59
Polisher	31	Multi-Function Powerhead	60-61
Dust Extraction Vacuum	32-33	Combo Kits	62-67
Backpack, Upright & Stick Vacuum	34-36	Accessories	68-71
Jobsite Fan	37		

Tool ◀▶ Battery ◀▶ Charger

DIGITAL COMMUNICATION





XGT is a system with its own tools, batteries and chargers. A combination of innovative tool design and higher output batteries provide a genuine solution for high demand industrial users.

OPTIMUM POWER SUPPLY SYSTEM & OPTIMUM CHARGING SYSTEM

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. Battery technology and motor engineering that work together for optimum performance.



40V MAX LI-ION BATTERIES

Battery	Charging Time
 2.5Ah Battery BL4025	28 min
 4.0Ah Battery BL4040 / BL4040F	45 min
 5.0Ah Battery BL4050F	50 min
 8.0Ah Battery BL4080F	76 min

DC40RA

40V Max Rapid Charger

The enlarged and raised LED light provides clearer indication of charging status.



ADP10

18V Battery Charging Adaptor



Compatible with LXT Li-ion batteries

DC40RB

40V Max Same Time Dual Port Rapid Charger





BUILT TOUGH

High durability specifications specially designed for 40V Max Li-Ion batteries



HIGH RIGIDITY BATTERY RAILS

Durable slide in battery rail that holds the battery and the tools firmly and securely to withstand high power products.



TERMINAL SHORT-CIRCUIT PREVENTION STRUCTURE

The protection wall is positioned between terminals to protect against water and dust.



WATER RESISTANT TRIPLE-LAYER STRUCTURE

Prevents cell failure due to water and dust.



SHOCK ABSORPTION STRUCTURE

Drastically increased drop impact resistance. Heavy duty outer casing and cell holder.

BUILT SMART

New Optimum Charging System



OPTIMUM CHARGING SYSTEM

Rapid optimum charge is achieved by feeding real time data of the battery being charged with the charging control system. Data such as battery condition and cell temperature are communicated to optimise the charge.

NEW CHARGING STATUS INDICATOR LIGHT

The enlarged and raised LED light provides clearer indication of charging status.



COMPATIBLE WITH LXT LI-ION BATTERIES

ADP10 was developed for use with the DC40RA to rapid charge 18V batteries faster than ever before.



DUAL COOLING FANS

One for the battery and one for the charging circuit. This enables the charger to rapid charge batteries constantly without slowing down due to increased heat.

POWERS 260+

LXT PRODUCTS

The 18V Battery Charger Adaptor (ADP10) provides users a link between the 18V LXT and 40V Max XGT battery platforms. When using the 18V Battery Charging Adaptor with the 40V Max Rapid Charger (DC40RA) 18V LXT batteries are able to be rapid charged faster than ever before. Creating this link gives users the convenience of access to both battery platforms.

TWO BATTERY PLATFORMS, ONE CHARGER.



ADP10
**CHARGING
ADAPTOR**

DC40RA
CHARGER

HAMMER DRIVER DRILL / DRILL

40V Max Brushless HAMMER DRIVER DRILL

HP001G



- Heavy duty power with 141Nm peak torque
- Active feedback sensors shut down the tool in the event of a kickback
- Massive drilling capacity with 152mm hole saw & 50mm auger bit
- 35% faster drilling speed compared with the equivalent 18V model
- Electronic clutch for selecting between 41 torque range settings

Max. Drilling Capacities in Wood	Auger Bit: 50mm Self-Feeding Bit: 76mm Hole Saw: 152mm
Max. Drilling Capacities in Steel	20mm
Max. Drilling Capacities in Masonry	20mm
No Load Speed	Hi: 0 - 2,600rpm Lo: 0 - 650rpm
Impact Rate	Hi: 0 - 39,000ipm Lo: 0 - 9,750ipm
Max. Peak Torque	141Nm
Max. Tightening Torque	Hard: 140Nm Soft: 68Nm
Overall Length	182mm
Skin Weight	2.0kg
Weight (With Battery)	3.0kg (BL4040)
Voltage	40V Max



40V Max Brushless DRIVER DRILL

DF001G

- Heavy duty power with 141Nm peak torque
- Active feedback sensors shut down the tool in the event of a kickback
- Massive drilling capacity with 152mm hole saw & 50mm auger bit
- 35% faster drilling speed compared with the equivalent 18V model
- Electronic clutch for selecting between 41 torque range settings

Max. Drilling Capacities in Wood	Auger Bit: 50mm Self-Feeding Bit: 76mm Hole Saw: 152mm
Max. Drilling Capacities in Steel	20mm
No Load Speed	Hi: 0 - 2,600rpm Lo: 0 - 650rpm
Max. Peak Torque	141Nm
Max. Tightening Torque	Hard: 140Nm Soft: 68Nm
Overall Length	182mm
Skin Weight	2.0kg
Weight (With Battery)	3.0kg (BL4040)
Voltage	40V Max



40V Max Brushless RIGHT ANGLE DRILL

DA001G

- Massive drilling capacity with up to 159mm hole saw capacity
- Automatic Torque Drive increases torque to power through any task
- 136Nm of max torque with a torque limiter reducing kickback if the bit binds
- High durability 13mm keyed chuck for secure bit retention
- 2 speed mechanical clutch for high speed and high torque applications

Max. Drilling Capacities in Wood	Auger Bit: 50mm Self-Feeding Bit: 118mm Hole Saw: 159mm
Max. Drilling Capacities in Steel	13mm
No Load Speed	Hi: 0 - 1,500rpm Lo: 0 - 400rpm
Max. Peak Torque	136Nm
Max. Tightening Torque	Hard: 136Nm Soft: 55Nm
Overall Length	545mm
Skin Weight	4.9kg
Weight (With Battery)	5.9kg (BL4040)
Voltage	40V Max

NEW



40V Max Brushless IMPACT DRIVER

TD001G

- Heavy duty power with 220Nm max. torque
- Precision fastening with enhanced anvil stability for less bit wobble
- Optimised application selector with 6 modes adapting speed and impacts for each task
- Single hand quick change trigger allows user to change between speeds and modes at the touch of a button
- Constant speed control allows tool to operate at the same speed regardless of battery capacity

Max. Capacities Standard Bolt	M5 - M16
Max. Capacities High Tensile Bolt	M5 - M14
No Load Speed	Max.: 0 - 3,700rpm Hard: 0 - 3,200rpm Med: 0 - 2,100rpm Soft: 0 - 1,100rpm
Impact Rate	Max.: 0 - 4,400ipm Hard: 0 - 3,600ipm Med: 0 - 2,600ipm Soft: 0 - 1,100ipm
Max. Tightening Torque	Max.: 220Nm Hard: 170Nm Med: 50Nm Soft: 20Nm
Drive Shank	6.35mm (1/4") Hex
Overall Length	120mm
Skin Weight	1.0kg
Weight (With Battery)	2.0kg (BL4040)
Voltage	40V Max



40V Max Brushless IMPACT DRIVER

TD003G

- 4 speed power selection and T-Mode for tightening self-drilling screws
- Heavy duty power with 210Nm max. torque
- Precision fastening with enhanced anvil stability for less bit wobble
- Constant speed control allows tool to operate at the same speed regardless of battery capacity
- Compact length at only 121mm, ideal for working in tight spaces

Max. Capacities Standard Bolt	M5 - M16
Max. Capacities High Tensile Bolt	M5 - M14
No Load Speed	Max.: 0 - 3,700rpm Hard: 0 - 3,200rpm Med: 0 - 2,100rpm Soft: 0 - 1,100rpm
Impact Rate	Max.: 0 - 4,100ipm Hard: 0 - 3,600ipm Med: 0 - 2,600ipm Soft: 0 - 1,100ipm
Max. Tightening Torque	Max.: 210Nm Hard: 170Nm Med: 50Nm Soft: 20Nm
Drive Shank	6.35mm (1/4") Hex
Overall Length	121mm
Skin Weight	1.0kg
Weight (With Battery)	2.0kg (BL4040)
Voltage	40V Max



IMPACT WRENCH



1,800Nm
Max. Fastening Torque



40V Max Brushless 3/4" IMPACT WRENCH

TW001G

- Heavy duty power with 2,050Nm nut busting torque
- High durability construction with battery vibration suppression
- Optimised application selector, 6 modes customisable for each task
- Full speed mode shortens distance of trigger travel to hit full speed
- 4 Stage power selection for optimum rpm and fastening torque

Max. Capacities Standard Bolt	M12 - M36
Max. Capacities High Tensile Bolt	M10 - M27
No Load Speed	Max: 0 - 1,800rpm Hard: 0 - 1,400rpm Med: 0 - 1,150rpm Soft: 0 - 950rpm
Impact Rate	Max: 0 - 2,500ipm Hard: 0 - 2,400ipm Med: 0 - 2,200ipm Soft: 0 - 1,900ipm
Max. Fastening Torque	Max: 1,800Nm Hard: 1,500Nm Medium: 840Nm Soft: 450Nm
Nut Busting Torque	2,050Nm
Drive Shank	3/4" Square C-Ring
Overall Length	217mm
Skin Weight	3.2kg
Weight (With Battery)	4.2kg (BL4040)
Voltage	40V Max



Pin Detent

40V Max Brushless 1/2" Mid-Torque IMPACT WRENCH

TW007G

- High power in a compact design with 1,100Nm nut busting torque
- Continues to perform in continuous heavy duty application
- Application selector with 6 modes adapting speed and impacts
- Full speed mode shortens the distance of trigger travel required to hit full speed
- 4 Stage power selection for optimum rpm and fastening torque

Max. Capacities Standard Bolt	M10 - M24
Max. Capacities High Tensile Bolt	M10 - M16
No Load Speed	Max: 0 - 2,300rpm Hard: 0 - 1,900rpm Med: 0 - 1,200rpm Soft: 0 - 600rpm
Impact Rate	Max: 0 - 2,900ipm Hard: 0 - 2,700ipm Med: 0 - 1,900ipm Soft: 0 - 1,200ipm
Max. Fastening Torque	Max: 760Nm Hard: 320Nm Med: 200Nm Soft: 150Nm
Nut Busting Torque	1,100Nm
Drive Shank	1/2" Square C-Ring
Overall Length	170mm
Skin Weight	2.3kg
Weight (With Battery)	3.3kg (BL4040)
Voltage	40V Max

40V Max Brushless 1/2" Mid-Torque IMPACT WRENCH

TW008G

- High power in a compact design with 1,100Nm nut busting torque
- Continues to perform in continuous heavy duty application
- Application selector with 6 modes adapting speed and impacts
- Full speed mode shortens the distance of trigger travel required to hit full speed
- 4 Stage power selection for optimum rpm and fastening torque

Max. Capacities Standard Bolt	M10 - M24
Max. Capacities High Tensile Bolt	M10 - M16
No Load Speed	Max: 0 - 2,300rpm Hard: 0 - 1,900rpm Med: 0 - 1,200rpm Soft: 0 - 600rpm
Impact Rate	Max: 0 - 2,900ipm Hard: 0 - 2,700ipm Med: 0 - 1,900ipm Soft: 0 - 1,200ipm
Max. Fastening Torque	Max: 760Nm Hard: 320Nm Med: 200Nm Soft: 150Nm
Nut Busting Torque	1,100Nm
Drive Shank	1/2" Square Pin Detent
Overall Length	170mm
Skin Weight	2.3kg
Weight (With Battery)	3.3kg (BL4040)
Voltage	40V Max



IMPACT WRENCH



40V Max Brushless 1/2" IMPACT WRENCH

TW004G

- High power in a compact design with 630Nm nut busting torque
- Continues to perform in continuous heavy duty application
- Application selector with 6 modes adapting speed and impacts
- Full speed mode shortens the distance of trigger travel required to hit full speed
- 4 Stage power selection for optimum rpm and fastening torque

Max. Capacities Standard Bolt	M10 - M20
Max. Capacities High Tensile Bolt	M10 - M16
No Load Speed	Max: 0 - 3,200rpm Hard: 0 - 2,600rpm Med: 0 - 1,800rpm Soft: 0 - 1,000rpm
Impact Rate	Max: 0 - 4,000ipm Hard: 0 - 3,400ipm Med: 0 - 2,600ipm Soft: 0 - 1,800ipm
Max. Fastening Torque	Max: 350Nm Hard: 210Nm Med: 160Nm Soft: 100Nm
Nut Busting Torque	630Nm
Drive Shank	1/2" Square C-Ring
Overall Length	144mm
Skin Weight	1.2kg
Weight (With Battery)	2.2kg (BL4040)
Voltage	40V Max



Pin Detent

40V Max Brushless 1/2" Pin Detent IMPACT WRENCH

TW005G

- High power in a compact design with 630Nm nut busting torque
- Continues to perform in continuous heavy duty application
- Application selector with 6 modes adapting speed and impacts
- Full speed mode shortens the distance of trigger travel required to hit full speed
- 4 Stage power selection for optimum rpm and fastening torque

Max. Capacities Standard Bolt	M10 - M20
Max. Capacities High Tensile Bolt	M10 - M16
No Load Speed	Max: 0 - 3,200rpm Hard: 0 - 2,600rpm Med: 0 - 1,800rpm Soft: 0 - 1,000rpm
Impact Rate	Max: 0 - 4,000ipm Hard: 0 - 3,400ipm Med: 0 - 2,600ipm Soft: 0 - 1,800ipm
Max. Fastening Torque	Max: 350Nm Hard: 210Nm Med: 160Nm Soft: 100Nm
Nut Busting Torque	630Nm
Drive Shank	1/2" Square Pin Detent
Overall Length	144mm
Skin Weight	1.2kg
Weight (With Battery)	2.2kg (BL4040)
Voltage	40V Max



RAPID
FIRING UP TO 5,000 NAILS
 On a single 2.5Ah battery



40V Max Brushless 18Ga BRAD NAILER

FN001G

- Rapid fire 18Ga brad nails between 15-40mm
- Counterweight mechanism offsets rebound force for a high quality finish
- Spring drive motor delivers up to 5,000 nails runtime on a 2.5Ah battery
- Ultra compact & lightweight at only 2.6kg in weight with a 2.5Ah
- Depth driving adjustment for ideal sinking depth

Fastener Length	15, 20, 25, 30, 35, 40mm
Gauge	18Ga
Magazine Capacity	100pcs
Sound Pressure Level	81dB
Vibration	2.5m/s ²
Overall Length	265mm
Skin Weight	1.9kg
Weight (With Battery)	2.9kg (BL4040)
Voltage	40V Max



40V Max Brushless 23Ga PIN NAILER

PT001G

- Accepts 15, 18, 25, 30 & 35mm length nails
- Low recoil force for easier handling and quality finish nailing
- Powerful spring drive mechanism, improves driving speed
- Up to 6000+ shots on a fully charged 2.5Ah battery
- Anti-dry fire mechanism and easy to see slim nose

Fastener Length	15, 18, 25, 30, 35mm
Gauge	23Ga
Magazine Capacity	100pcs
Sound Pressure Level	79dB (A)
Vibration	2.5m/s ²
Overall Length	265mm
Skin Weight	1.7kg
Weight (With Battery)	2.7kg (BL4040)
Voltage	40V Max

ANGLE GRINDER



40V Max Brushless 230mm (9") ANGLE GRINDER

GA038G

- Heavy duty power provided by increased wheel rotation when heavily loaded
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- High durability with advanced protection against heat and dust
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Wheel Diameter	230mm (9")
Switch Type	Paddle Switch
Electric Brake	Yes
AWS Compatible	Yes
No Load Speed	6,600rpm
Overall Length	535mm
Skin Weight	6.1kg
Weight (With Battery)	7.4kg (BL4050F)
Voltage	40V Max



40V Max Brushless 180mm (7") ANGLE GRINDER

GA037G

- Heavy duty power provided by increased wheel rotation when heavily loaded
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- High durability with advanced protection against heat and dust
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Wheel Diameter	180mm (7")
Switch Type	Paddle Switch
Electric Brake	Yes
AWS Compatible	Yes
No Load Speed	7,800rpm
Overall Length	535mm
Skin Weight	4.1kg
Weight (With Battery)	5.4kg (BL4050F)
Voltage	40V Max

40V Max Brushless 125mm (5") Paddle Switch ANGLE GRINDER

GA050G



NEW

- Heavy duty power equivalent to a 1,400W AC angle grinder
- Anti-vibration rubber joint reducing vibration transferred to handle
- Active feedback sensors shut down the tool in the event of a kickback
- High durability with advanced protection against heat and dust
- Enhanced safety features including an electric brake, soft start & anti-restart

Wheel Diameter	125mm (5")
Switch Type	Paddle Switch
Electric Brake	Yes
AWS Compatible	No
No Load Speed	11,000rpm
Overall Length	410mm
Skin Weight	2.31kg
Weight (With Battery)	3.31kg (BL4040)
Voltage	40V Max



40V Max Brushless X-Lock Variable Speed 125mm (5") ANGLE GRINDER

GA041G

- X-lock allows installation of accessories in a single action
- Variable speed control dial allows between 3,000 - 8,500rpm
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Wheel Diameter	125mm (5")
Switch Type	Slide Switch
Electric Brake	Yes
AWS Compatible	Yes
No Load Speed	3,000 - 8,500rpm
Overall Length	433mm
Skin Weight	2.3kg
Weight (With Battery)	3.3kg (BL4040)
Voltage	40V Max



40V Max Brushless X-Lock Variable Speed 125mm (5") ANGLE GRINDER

GA044G

- X-lock allows installation of accessories in a single action
- Variable speed control dial allows between 3,000 - 8,500rpm
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Wheel Diameter	125mm (5")
Switch Type	Paddle Switch
Electric Brake	Yes
AWS Compatible	Yes
No Load Speed	3,000 - 8,500rpm
Overall Length	433mm
Skin Weight	2.3kg
Weight (With Battery)	3.3kg (BL4040)
Voltage	40V Max

40V Max Brushless X-Lock 125mm (5") ANGLE GRINDER

GA047G



- X-lock allows installation of accessories in a single action
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- High durability with advanced protection against heat and dust
- Improved heat dissipation capacity allows for continuous heavy duty use

Wheel Diameter	125mm (5")
Switch Type	Paddle Switch
Electric Brake	Yes
AWS Compatible	No
No Load Speed	8,500rpm
Overall Length	418mm
Skin Weight	2.2kg
Weight (With Battery)	3.2kg (BL4040)
Voltage	40V Max

ANGLE GRINDER



40V Max Brushless Variable Speed 125mm (5") ANGLE GRINDER

GA023G

- Variable speed control dial allows between 3,000 - 8,500rpm
- High durability with advanced protection against heat and dust
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Wheel Diameter	125mm (5")
Switch Type	Slide Switch
Electric Brake	Yes
No Load Speed	3,000 - 8,500rpm
Overall Length	425mm
Skin Weight	2.3kg
Weight (With Battery)	3.3kg (BL4040)
Voltage	40V Max



40V Max Brushless Variable Speed 125mm (5") ANGLE GRINDER

GA029G

- Variable speed control dial allows between 3,000 - 8,500rpm
- High durability with advanced protection against heat and dust
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Wheel Diameter	125mm (5")
Switch Type	Paddle Switch
Electric Brake	Yes
No Load Speed	3,000 - 8,500rpm
Overall Length	425mm
Skin Weight	2.3kg
Weight (With Battery)	3.3kg (BL4040)
Voltage	40V Max



40V Max Brushless 125mm (5") ANGLE GRINDER

GA005G

- Heavy duty power cutting 40% faster than the 18V equivalent model
- High durability with advanced protection against heat and dust
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- Improved heat dissipation capacity allows for continuous heavy duty use

Wheel Diameter	125mm (5")
Switch Type	Slide Switch
Electric Brake	Yes
No Load Speed	8,500rpm
Overall Length	410mm
Skin Weight	2.2kg
Weight (With Battery)	3.2kg (BL4040)
Voltage	40V Max



40V Max Brushless 125mm (5") ANGLE GRINDER

GA013G

- Heavy duty power cutting 40% faster than the 18V equivalent model
- High durability with advanced protection against heat and dust
- Active feedback sensors shut down the tool in the event of a kickback
- Enhanced safety features including an electric brake, soft start & anti-restart
- Improved heat dissipation capacity allows for continuous heavy duty use

Wheel Diameter	125mm (5")
Switch Type	Paddle Switch
Electric Brake	Yes
No Load Speed	8,500rpm
Overall Length	410mm
Skin Weight	2.2kg
Weight (With Battery)	3.2kg (BL4040)
Voltage	40V Max

SLIDE COMPOUND SAW



40V Max Brushless 305mm (12") SLIDE COMPOUND SAW

LS003G

- Forward rail design maximises work space and provides smooth precise cutting
- Shadow line projects cut line onto work material
- Dual zone dust extraction ports suppress dust scattering of wood chips
- Constant speed control maintains cutting speed under heavy load
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	Max. Width: 92 x 382mm Max. Height: 107 x 363mm
Max. Cutting Capacities at 45° Mitre	Max. Width: 92 x 268 Max. Height: 107 x 255
Bevel Capacity	48° left - 48° right
Mitre Capacity	60° left - 60° right
Blade Diameter	305mm (12")
Bore Diameter	25.4mm
No Load Speed	3,600rpm
Overall Length	898mm
Skin Weight	29.8kg
Weight (With Battery)	31.1kg (BL4050F)
Voltage	40V Max



40V Max Brushless 260mm (10-1/4") SLIDE COMPOUND SAW

LS004G

- Forward rail design maximises work space and provides smooth precise cutting
- Shadow line projects cut line onto work material
- Dual zone dust extraction ports suppress dust scattering of wood chips
- Constant speed control maintains cutting speed under heavy load
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	Max. Width: 68 x 310mm Max. Height: 91 x 279mm
Max. Cutting Capacities at 45° Mitre	Max. Width: 68 x 218 Max. Height: 91 x 197
Bevel Capacity	48° left - 48° right
Mitre Capacity	60° left - 60° right
Blade Diameter	260mm (10-1/4")
Bore Diameter	25.4mm
No Load Speed	3,600rpm
Overall Length	805mm
Skin Weight	25.9kg
Weight (With Battery)	26.9kg (BL4040)
Voltage	40V Max

40V Max Brushless 216mm (8-1/2") SLIDE COMPOUND SAW

LS002G



- Forward rail design for smooth precise cutting
- Expandable sub-table for improved stability when cutting long material
- Shadow line projects cut line onto work material
- Dual zone dust extraction ports suppress dust scattering of wood chips
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	70x312mm
Max. Cutting Capacities at 45° Mitre	70x220mm
Bevel Capacity	48° left - 48° right
Mitre Capacity	60° left - 60° right
Blade Diameter	216mm (8-1/2")
Bore Diameter	25.4mm
No Load Speed	4,800rpm
Overall Length	702mm
Skin Weight	15.6kg
Weight (With Battery)	16.6kg (BL4040)
Voltage	40V Max

PLUNGE CUT SAW



**CONSTANT
SPEED CONTROL**
Maintains cutting speed under heavy load

40V Max Brushless 165mm (6-1/2") PLUNGE CUT SAW

SP001G

- Compatible with optional guide rail system for ultra precise straight cutting
- Constant speed control maintains cutting speed under heavy load
- Electric blade brake and soft start improve safety during use
- Dual front and rear bevel lock provide additional rigidity for accurate bevel cuts
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter



Max. Cutting Capacities at 0°	56mm
Max. Cutting Capacities at 45°	40mm
Max. Cutting Capacities at Max Bevel	34mm
Bevel Capacity	-1° - 48°
Blade Diameter	165mm (6-1/2")
Bore Diameter	20mm
No Load Speed	2,500 - 4,900rpm
Overall Length	375mm
Skin Weight	3.7kg
Weight (With Battery)	4.7kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025* / BL4040* BL4050F* / BL4080F *Recommended



40V Max Brushless 270mm (10-5/8") CIRCULAR SAW

HS011G

- Guide rail compatible saw base adapts with optional guide rails to provide perfectly straight cut
- Heavy duty power with constant speed control maintaining blade speed under load
- Safety protection with electric brake and soft start for user safety
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Lightweight design and optimised balance improving the tools manoeuvrability

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	101mm
Max. Cutting Capacities at 45°	71mm
Max. Cutting Capacities at Max Bevel	51mm
Bevel Capacity	-1° - 60°
Blade Diameter	270mm (10-5/8")
Bore Diameter	25.4mm
No Load Speed	3,500rpm
Overall Length	453mm
Skin Weight	4.8kg
Weight (With Battery)	5.8kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025 / BL4040 BL4050F* / BL4080F* *Recommended



40V Max Brushless 235mm (9-1/4") CIRCULAR SAW

HS009G

- Guide rail compatible saw base adapts with optional guide rails to provide perfectly straight cut
- Heavy duty power with constant speed control maintaining blade speed under load
- Safety protection with electric brake and soft start for user safety
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Lightweight design and optimised balance improving the tools manoeuvrability

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	85mm
Max. Cutting Capacities at 45°	61mm
Max. Cutting Capacities at Max Bevel	44mm
Bevel Capacity	-1° - 60°
Blade Diameter	235mm (9-1/4")
Bore Diameter	25.4mm
No Load Speed	4,000rpm
Overall Length	413mm
Skin Weight	4.4kg
Weight (With Battery)	5.4kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025 / BL4040 BL4050F* / BL4080F* *Recommended



CIRCULAR SAW



40V Max Brushless 185mm (7-1/4") CIRCULAR SAW

HS003G

- Heavy duty power with cutting speeds faster than the equivalent 240V model
- Safety protection with electric brake and soft start for user safety
- Innovative technology with automatic torque drive optimising cutting speed & torque
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Lightweight design and optimised balance improving the tools manoeuvrability

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	66mm
Max. Cutting Capacities at 45°	45.5mm
Max. Cutting Capacities at Max Bevel	34mm
Bevel Capacity	0° - 56°
Blade Diameter	185mm (7-1/4")
Bore Diameter	20mm
No Load Speed	6,000rpm
Overall Length	331mm
Skin Weight	3.4kg
Weight (With Battery)	4.4kg (BL4040)
Voltage	40V Max

40V Max Brushless 165mm (6-1/2") CIRCULAR SAW

HS012G



40V Max Brushless 185mm (7-1/4") CIRCULAR SAW

HS004G

- Guide rail compatible saw base adapts with optional guide rails to provide perfectly straight cut
- Heavy duty power with rapid cutting speeds at 6,000rpm
- Safety protection with electric brake and soft start for user safety
- Innovative technology with automatic torque drive optimising cutting speed & torque
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	60mm
Max. Cutting Capacities at 45°	43mm
Max. Cutting Capacities at Max Bevel	41mm
Bevel Capacity	0° - 48°
Blade Diameter	185mm (7-1/4")
Bore Diameter	20mm
No Load Speed	6,000rpm
Overall Length	337mm
Skin Weight	3.7kg
Weight (With Battery)	4.7kg (BL4040)
Voltage	40V Max

- Heavy duty power cutting 40% faster than the 18V equivalent model
- Active feedback sensors shut down the tool in the event of a kickback
- Constant speed control maintains cutting speed under heavy load
- Safety protection with electric brake and soft start for user safety
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	57mm
Max. Cutting Capacities at 45°	41mm
Bevel Capacity	0° - 50°
Blade Diameter	165mm (6-1/2")
Bore Diameter	20mm
No Load Speed	5,200rpm
Overall Length	352mm
Skin Weight	2.48kg
Weight (With Battery)	3.48kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025* / BL4040* BL4050F / BL4080F *Recommended



40V Max Brushless 260mm (10-1/4") REAR HANDLE SAW

RS002G

- Massive cutting capacity with a 95mm cutting depth
- Innovative technology with automatic torque drive optimising cutting speed & torque
- Safety protection with electric brake and soft start for user safety
- Lightweight design and optimised balance improving the tools manoeuvrability
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Max. Cutting Capacities at 0°	95mm
Max. Cutting Capacities at 45°	70mm
Max. Cutting Capacities at Max Bevel	54.5mm
Bevel Capacity	0° - 56°
Blade Diameter	260mm (10-1/4")
Bore Diameter	30mm
No Load Speed	4,000rpm
Overall Length	489mm
Skin Weight	5.0kg
Weight (With Battery)	6.3kg (BL4050F)
Voltage	40V Max



40V Max Brushless 185mm (7-1/4") REAR HANDLE SAW

RS001G

- Makita-built brushless motor delivers up to 6,400rpm for faster cutting performance
- Innovative technology with automatic torque drive optimising cutting speed & torque
- Safety protection with electric brake and soft start for user safety
- Lightweight design and optimised balance improving the tools manoeuvrability
- Maximum cutting depth of 65mm provides best in class cutting depth

Max. Cutting Capacities at 0°	65mm
Max. Cutting Capacities at 45°	45mm
Max. Cutting Capacities at Max Bevel	38mm
Bevel Capacity	0° - 53°
Blade Diameter	185mm (7-1/4")
Bore Diameter	20mm
No Load Speed	6,400rpm
Overall Length	446mm
Skin Weight	4.4kg
Weight (With Battery)	5.6kg (BL4050F)
Voltage	40V Max



RECIPRO SAW / JIGSAW



40V Max Brushless ORBITAL RECIPRO SAW

JR002G

- High performance cutting with orbital cutting mechanism for heavy load demolition
- Anti-vibration technology provides extremely low vibration of 8.5m/s²
- High durability construction with reinforced self lubricating slider
- Blade ejection lever for convenient blade removal
- Variable speed control dial, high speed for wood cutting & low speed for metal cutting

Max. Cutting Capacities in Wood	255mm
Max. Cutting Capacities in Pipe	ø 130mm
Length of Stroke	32mm
Strokes per Minute	0 - 3,000spm
Overall Length	451mm
Skin Weight	3.9kg
Weight (With Battery)	4.9kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025* / BL4040* BL4050F* / BL4080F *Recommended



40V Max Brushless RECIPRO SAW

JR001G

- High performance cutting speeds up to 35% faster than the equivalent 18V model
- Massive cutting capacity with the ability to cut wood up to 255mm wide
- High durability construction with battery vibration suppression protecting the battery
- Blade ejection lever for convenient blade removal
- Electric speed selector, high speed for wood cutting & low speed for metal cutting

Max. Cutting Capacities in Wood	255mm
Max. Cutting Capacities in Pipe	ø 130mm
Length of Stroke	32mm
Strokes per Minute	Hi: 0 - 3,000spm Lo: 0 - 2,300spm
Overall Length	457mm
Skin Weight	3.5kg
Weight (With Battery)	4.5kg (BL4040)
Voltage	40V Max

NEW



40V Max Brushless BARREL HANDLE JIGSAW

JV001G

- Heavy duty power cutting 20% faster than the 18V equivalent model
- Constant speed control maintains cutting speed under heavy load
- Enhanced safety features including an electric brake and soft start
- 3 orbital settings plus straight cutting deliver faster and more accurate cuts in a variety of materials
- Soft No Load automatically reduces SPM for accurate cutting

Max. Cutting Capacities in Wood	135mm
Max. Cutting Capacities in Steel	10mm
Max. Cutting Capacities in Aluminium	20mm
Length of Stroke	26mm
Strokes per Minute	800 - 3,500spm
Bevel Capacity	45° left - 45° right
Overall Length	269mm
Skin Weight	1.9kg
Weight (With Battery)	2.9kg (BL4040)
Voltage	40V Max

NEW



40V Max Brushless D-HANDLE JIGSAW

JV002G

- Heavy duty power cutting 20% faster than the 18V equivalent model
- Constant speed control maintains cutting speed under heavy load
- Enhanced safety features including an electric brake and soft start
- 3 orbital settings plus straight cutting deliver faster and more accurate cuts in a variety of materials
- Soft No Load automatically reduces SPM for accurate cutting

Max. Cutting Capacities in Wood	135mm
Max. Cutting Capacities in Steel	10mm
Max. Cutting Capacities in Aluminium	20mm
Length of Stroke	26mm
Strokes per Minute	0 - 3,500spm
Bevel Capacity	45° left - 45° right
Overall Length	280mm (BL4040)
Skin Weight	2.0kg
Weight (With Battery)	3.0kg (BL4040)
Voltage	40V Max

LAMINATE TRIMMER / PLANER



40V Max Brushless LAMINATE TRIMMER

RT001G

- Up to 35% faster cutting than the 18V LXT equivalent
- Constant speed control and soft start for performance and control
- 10,000 - 31,000rpm no load speed for a clean professional finish
- Aluminium base compatible with a variety of optional trimmer bases
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Collet Capacity	6.35mm (1/4")
Plunge Capacity	Trimmer Base: 0 - 40mm Plunge Base: 0 - 35mm
No Load Speed	10,000 - 31,000rpm
Overall Length	226mm
Skin Weight	1.5kg
Weight (With Battery)	2.5kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025* / BL4040* / BL4050F *Recommended

40V Max Brushless 82mm PLANER

KP001G

- High powered brushless motor allows for a massive 4mm maximum cutting depth
- Auto-start Wireless System (AWS) for on demand dust extraction*
- 15,000rpm no load speed for rapid cutting speeds
- Left or right side chip ejection
- Electric brake & foot on base plate protect workpiece from damage

*Requires optional wireless transmitter

Planing Width	82mm
Max. Planing Depth	4mm
Shiplapping / Rebate	25mm
No Load Speed	15,000rpm
Noise	87db(A)
Vibration	4.3m/s ²
Overall Length	385mm
Skin Weight	3.0kg
Weight (With Battery)	4.0kg (BL4040)
Voltage	40V Max



METAL CUT SAW / BANDSAW



40V Max Brushless 185mm (7-1/4") METAL CUT SAW

CS002G

- High power brushless motor allows for a massive 67mm cutting depth
- Active feedback sensors shut down the tool in the event of a kickback
- Constant speed control maintaining blade speed under load for rapid cutting
- Safety protection with electric brake and soft start for user safety
- Quick release chip collector captures debris produced while cutting

Max. Cutting Depth	67mm
Blade Diameter	185mm
No Load Speed	3,500rpm
Overall Length	350mm
Skin Weight	3.5kg
Weight (With Battery)	4.5kg (BL4040)
Voltage	40V Max



40V Max Brushless BANDSAW

PB002G

- Up to 200% faster cutting 100mm steel pipe with 6mm thickness than the 18V LXT equivalent
- Constant speed control, blade speed remains constant under heavy load for faster cutting
- Variable speed via trigger and dial for controlled cutting in various materials
- High durability aluminium frame for stable cutting up to 127x127mm
- Enhanced safety features including an electric brake, soft start and anti-restart

Cutting Capacities	127 x 127mm
Blade Speed	0 - 192m/min
Blade Size (LxWxH)	1,140 x 13 x 0.5mm
Overall Length	510mm
Skin Weight	5.9kg
Weight (With Battery)	6.9kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025* / BL4040* BL4050F / BL4080F *Recommended





80V Max (40Vx2) Brushless 355mm (14") POWER CUT

CE001G

- Active feedback sensors, shuts down the tool in the event of kickback
- Advanced safety protection with the electric brake and extremely low vibration of only 2.0m/s²
- Massive max. cutting depth of 127mm at a rapid 5,300rpm
- Water resistance of IPX4 for increased protection against moisture ingress
- Water supply adaptor for water suppression during masonry cuts

Wheel Diameter	355mm (14")
Max. Cutting Depth	127mm
No Load Speed	5,300rpm
Noise	108.7dB
Vibration	2.0m/s ²
Overall Length	786mm
Skin Weight	10.3kg
Weight (With Battery)	14.1kg (2x BL4080F)
Voltage	80V Max (40Vx2)
Compatible Batteries	BL4040 / BL4050F* / BL4080F* *Recommended



NEW



80V Max (40Vx2) Brushless AWS 355mm (14") POWER CUT

CE002G

- Designed for dry cutting, efficient dust extraction minimising water and slurry
- Active feedback sensors, shuts down the tool in the event of kickback
- Advanced safety protection with the electric brake and extremely low vibration of only 2.0m/s²
- Massive max. cutting depth of 127mm at a rapid 4,200rpm
- Compatible with AWS for wireless connectivity with suitable dust extraction

Wheel Diameter	355mm (14")
Max. Cutting Depth	127mm
No Load Speed	4,200rpm
Noise	105.8dB
Vibration	2.0m/s ²
Overall Length	825mm
Skin Weight	11.3kg
Weight (With Battery)	15.1kg (2x BL4080F)
Voltage	80V Max (40Vx2)
Compatible Batteries	BL4040 / BL4050F* / BL4080F* *Recommended



ROTARY HAMMER



Up to
30%
FASTER DRILLING
than AC equivalent (HR5212C)



80V Max (40Vx2) Brushless 52mm SDS Max **ROTARY HAMMER**

HR006G

- Extreme power with 21.4j of impact energy
- Active feedback sensors shut down the tool in the event of a kickback
- Anti-vibration technology provides extremely low vibration of 8.5m/s²
- Soft no load function reduces speed and vibration when under no load for improved comfort
- Compatible with AWS* for wireless connectivity with compatible dust extraction

^Rating in accordance with EPTA 05/2009. *Requires optional wireless transmitter

Max. Drilling Capacities in Masonry	TCT Bit: 52mm Core Bit: 160mm
Chuck Type	SDS Max
Impact Energy	21.4j
No Load Speed	150 - 310rpm
Impact Rate	1,100 - 2,250ipm
Sound Pressure	99dB(A)
Vibration	8.5m/s ²
Overall Length	610mm
Skin Weight	11.7kg
Weight (With Battery)	14.3kg (BL4050F)
Voltage	80V Max (40Vx2)

40V Max Brushless 40mm SDS Max ROTARY HAMMER

HR005G



- Heavy duty power hitting at 8.0j[^] of impact energy
- Active feedback sensors shut down the tool in the event of a kickback
- Anti-vibration technology provides extremely low vibration of 5.0m/s²
- Soft no load function reduces speed and vibration when under no load for improved comfort
- Compatible with AWS* for wireless connectivity with compatible dust extraction

[^]Rating in accordance with EPTA 05/2009. *Requires optional wireless transmitter

Max. Drilling Capacities in Masonry	TCT Bit: 40mm Core Bit: 105mm
Chuck Type	SDS Max
Impact Energy	8.0j
No Load Speed	250 - 500rpm
Impact Rate	1,450 - 2,900ipm
Sound Pressure	91dB(A)
Vibration	5.0m/s ²
Overall Length	520mm
Skin Weight	6.9kg
Weight (With Battery)	8.2kg (BL4050F)
Voltage	40V Max



40V Max Brushless 30mm ROTARY HAMMER

HR008G

- Heavy duty power 3.9j[^] of impact force
- Active feedback sensors shut down the tool in the event of a kickback
- Anti-vibration technology provides extremely low vibration of 5.0m/s²
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Dust management compatible with multiple options for various environments

[^]Rating in accordance with EPTA 05/2009. *Requires optional wireless transmitter

Max. Drilling Capacities in Masonry	TCT Bit: 30mm Core Bit: 80mm Diamond Core Bit: 80mm
Chuck Type	SDS Plus Standard
Impact Energy	3.9j
No Load Speed	0 - 840rpm
Impact Rate	0 - 4,500ipm
Sound Pressure	91dB(A)
Vibration	9.1m/s ²
Overall Length	422mm
Skin Weight	5.4kg
Weight (With Battery)	6.4kg (BL4040)
Voltage	40V Max



Quick Change Chuck

40V Max Brushless 30mm ROTARY HAMMER

HR009G

- Heavy duty power 3.9j[^] of impact force
- Active feedback sensors shut down the tool in the event of a kickback
- Anti-vibration technology provides extremely low vibration of 5.0m/s²
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Dust management compatible with multiple options for various environments

[^]Rating in accordance with EPTA 05/2009. *Requires optional wireless transmitter

Max. Drilling Capacities in Masonry	TCT Bit: 30mm Core Bit: 80mm Diamond Core Bit: 80mm
Chuck Type	SDS Plus Quick Change Chuck
Impact Energy	3.9j
No Load Speed	0 - 840rpm
Impact Rate	0 - 4,500ipm
Sound Pressure	91dB(A)
Vibration	9.1m/s ²
Overall Length	439mm
Skin Weight	5.5kg
Weight (With Battery)	6.5kg (BL4040)
Voltage	40V Max

ROTARY HAMMER



Quick Change Chuck

40V Max Brushless 28mm ROTARY HAMMER

HR001G

- Heavy duty power 2.8j[^] of impact force
- Anti-vibration technology provides extremely low vibration of 7.0m/s²
- Active feedback sensors shut down the tool in the event of a kickback
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Variety of dust management options available

[^]Rating in accordance with EPTA 05/2009. *Requires optional wireless transmitter

Max. Drilling Capacities in Masonry	TCT Bit: 28mm Core Bit: 54mm Diamond Core Bit: 65mm
Chuck Type	Standard SDS Plus
Compatible Dust Extraction Unit	DX12
Impact Energy	2.8j
No Load Speed	0 - 980rpm
Impact Rate	0 - 5,000ipm
Sound Pressure	95dB(A)
Vibration	7.0m/s ²
Overall Length	373mm
Skin Weight	3.2kg
Weight (With Battery)	4.2kg (BL4040)
Voltage	40V Max

40V Max Brushless 28mm ROTARY HAMMER

HR002G

- Heavy duty power 2.9j[^] of impact force
- Anti-vibration technology provides extremely low vibration of 7.5m/s²
- Anti-vibration technology provides extremely low vibration of 5.0m/s²
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Variety of dust management options available

[^]Rating in accordance with EPTA 05/2009. *Requires optional wireless transmitter

Max. Drilling Capacities in Masonry	TCT Bit: 28mm Core Bit: 54mm Diamond Core Bit: 65mm
Chuck Type	Quick Change Chuck
Compatible Dust Extraction Unit	DX14
Impact Energy	2.9j
No Load Speed	0 - 980rpm
Impact Rate	0 - 5,000ipm
Sound Pressure	95dB(A)
Vibration	7.5m/s ²
Overall Length	404mm
Skin Weight	3.3kg
Weight (With Battery)	4.3kg (BL4040)
Voltage	40V Max



NEW



40V Max Brushless 28mm ROTARY HAMMER

HR007G

- Heavy duty power 3.0j[^] of impact force
- Anti-vibration technology provides extremely low vibration of 8.6m/s²
- Active feedback sensors shut down the tool in the event of a kickback
- Compatible with AWS* for wireless connectivity with compatible dust extraction
- Variety of dust management options available

[^]Rating in accordance with EPTA 05/2009. *Requires optional wireless transmitter

Max. Drilling Capacities in Masonry	TCT Bit: 28mm Core Bit: 54mm Diamond Core Bit: 65mm
Chuck Type	SDS Plus Standard
Impact Energy	3.0j
No Load Speed	0-980rpm
Impact Rate	0-5,000ipm
Sound Pressure	95dB(A)
Vibration	8.6m/s ²
Overall Length	473mm
Skin Weight	3.2kg
Weight (With Battery)	4.2kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025* / BL4040* / BL4050F *Recommended

40V Max Brushless Compact 20mm ROTARY HAMMER

HR010G

- Compact & lightweight design ideal for working in tight and overhead applications
- Anti-vibration technology provides extremely low vibration
- 2.1j* of impact energy deliver rapid drilling speeds
- Constant speed control maintains drilling speed under load
- 2-Mode operation for "Rotation Only" or "Hammering with Rotation" for multiple applications

[^]Rating in accordance with EPTA 05/2009

Max. Drilling Capacities in Masonry	TCT Bit: 20mm Core Bit: 35mm Diamond Core Bit: 32mm
Chuck Type	SDS Plus Standard
Impact Energy	2.1J
No Load Speed	0 - 1,350rpm
Impact Rate	0 - 5,000ipm
Sound Pressure	90dB(A)
Vibration	10.0m/s ²
Overall Length	289mm
Skin Weight	2.2kg
Weight (With Battery)	3.2kg (BL4040)
Voltage	40V Max



DEMOLITION HAMMER



80V Max (40Vx2) Brushless SDS Max DEMOLITION HAMMER

HM002G

- Heavy duty power delivering 15% faster breaking efficiency than the corded 1,510W equivalent
- Anti-Vibration Technology (AVT) an internal counterbalance system significantly reducing vibration
- Soft no-load automatically reduces motor speed when idling to increase tool life and performance
- Extreme Protection Technology (XPT) engineered for improved dust and water resistance for operation in harsh conditions
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Chuck Type	SDS Max
Impact Energy	20.9j
Impact Rate	950 - 1,900ipm
Vibration	8.0m/s ²
Noise	92dB
Overall Length	574mm
Skin Weight	10.7kg
Weight (With Battery)	13.3kg (BL4050F)
Voltage	40V Max



40V Max Brushless SDS Max DEMOLITION HAMMER

HM001G

- Heavy duty power delivering 20% faster breaking efficiency than the corded 1,100W equivalent
- Anti-Vibration Technology (AVT) an internal counterbalance system significantly reducing vibration
- Soft no-load automatically reduces motor speed when idling to increase tool life and performance
- Extreme Protection Technology (XPT) engineered for improved dust and water resistance for operation in harsh conditions
- Compatible with AWS* for wireless connectivity with compatible dust extraction

*Requires optional wireless transmitter

Chuck Type	SDS Max
Impact Energy	9.4j
Impact Rate	0 - 2,650ipm
Vibration	6.0m/s ²
Noise	89dB
Overall Length	496mm
Skin Weight	5.8kg
Weight (With Battery)	7.1kg (BL4050F)
Voltage	40V Max





CONSTANT SPEED CONTROL

Maintains speed for smooth consistent finish

40V Max Brushless 180mm (7") POLISHER

PV001G

- Constant speed control maintains rotation speed under load for a smooth even finish
- Variable speed control via both trigger and pre-set dial between 600-2,200rpm
- Elastomer bumper on gear housing for work piece protection
- Soft start and anti-restart improve user safety
- Ergonomically designed loop handle provides increased control when polishing at a variety of angles



Pad Size	180mm (7")
Spindle Thread	M14
No Load Speed	0 - 2,200rpm
Noise	80dB(A)
Vibration	2.5m/s ²
Overall Length	531mm
Skin Weight	2.5kg
Weight (With Battery)	3.5kg (BL4040)
Voltage	40V Max

DUST EXTRACTION VACUUM



LOW AIR-FLOW SENSOR



80V Max (40Vx2) AWS Brushless M Class DUST EXTRACTION VACUUM

VC006GM

- Auto-start Wireless System (AWS) for on demand dust extraction
- Automatic filter cleaning mechanism
- Brushless motor delivers up to 350W of suction power
- Flow rate sensor with low airflow alert
- Makpac connectability

Max. Sealed Suction	18kPa
Max. Air Volume	3.7m ³ /min
Tank Capacity	40L
Suction Power	350W
Continuous Runtime (Max)	40 minutes (Max suction) 2x BL4080F
Overall Length	598mm
Skin Weight	17kg
Weight (With Battery)	20.8kg (2x BL4080F)
Voltage	80V Max (40Vx2)

DUST EXTRACTION VACUUM



40V Max Brushless AWS DUST EXTRACTION VACUUM VC004G

- Auto-start Wireless System (AWS) for on demand dust extraction
- Brushless motor delivers up to 205W of suction power
- Powerful 23kPa max sealed suction performance
- 15L dust capacity with HEPA filter for 99.97% filtration
- Variable suction control dial for optimum suction and runtime

Max. Sealed Suction	23kPa
Max. Air Volume	3.2m ³ /min
Tank Capacity	15L
Suction Power	205W
Continuous Runtime (Max)	28 minutes (2x BL4050F)
Overall Length	475mm
Skin Weight	7.9kg
Weight (With Battery)	10.5kg (2x BL4050F)
Voltage	40V Max



40V Max Brushless Wet/Dry DUST EXTRACTION VACUUM VC003G

- Brushless motor delivers up to 310W of suction power
- Continuous operation of up to 28 minutes on Max suction*
- Powerful 23kPa max sealed suction performance
- 15L dust capacity with washable cloth filter
- Variable suction control dial for optimum suction and runtime

*Max suction with 2x BL4050F

Max. Sealed Suction	23kPa
Max. Air Volume	3.2m ³ /min
Tank Capacity	Dry: 15L / Wet: 12L
Suction Power	310W
Continuous Runtime (Max)	28 minutes (2x BL4050F)
Overall Length	475mm
Skin Weight	7.7kg
Weight (With Battery)	10.3kg (2x BL4050F)
Voltage	40V Max



BACKPACK VACUUM



NEW

40V Max Brushless AWS BACKPACK VACUUM

VC012G

- 2.1m³/min Max airflow for effective dust extraction
- Auto-start Wireless System(AWS) for on demand dust extraction
- Max sealed suction of 20kPa for effective dust extraction
- HEPA filter for 99.97% filtration with 6L reusable dust bag
- Standard cuffs suit a range of dust extraction accessories and tools

Max. Sealed Suction	20kPa
Max. Air Volume	2.1m ³ /min
Tank Capacity	6L
Suction Power	180W, 85W, 45W
Continuous Runtime (Max)	40 minutes (2x BL4050F)
Overall Length	526mm
Skin Weight	5.7kg
Weight (With Battery)	8.3kg (2x BL4050F)
Voltage	40V Max



40V Max Brushless AWS BACKPACK VACUUM

VC009G

- Lightweight at only 4.7kgs with BL4050F
- Auto-start Wireless System (AWS) for on demand dust extraction
- Max sealed suction of 18kPa for effective dust extraction
- HEPA filter for 99.97% filtration with 1.5L reusable dust bag
- Standard cuffs suit a range of dust extraction accessories and tools

Max. Sealed Suction	18kPa
Max. Air Volume	1.9m ³ /min
Tank Capacity	2L
Suction Power	165W, 85W, 45W
Continuous Runtime (Max)	14 minutes (Max suction) BL4050F
Overall Length	375mm
Skin Weight	3.4kg
Weight (With Battery)	4.7kg (BL4050F)
Voltage	40V Max



NEW

40V Max Brushless BACKPACK VACUUM

VC011G

- Lightweight at 7.6kgs with 2x BL4040
- HEPA filter for 99.97% filtration with 6L reusable dust bag
- Powerful max air volume of 40L/s for heavy duty applications
- Adjustable aluminium telescopic wand
- Convenient battery fuel gauge on hand control piece

Max. Sealed Suction	20kPa
Max. Air Volume	2.4m ³ /min
Tank Capacity	6L
Suction Power	195W, 100W, 55W, 25W
Continuous Runtime (Max)	32 minutes (2x BL4040)
Overall Length	526mm
Skin Weight	5.6kg
Weight (With Battery)	7.6kg (2x BL4040)
Voltage	40V Max



40V Max Brushless BACKPACK VACUUM

VC008G06

- Lightweight at only 4.7kgs with BL4050F
- HEPA filter for 99.97% filtration with 1.5L reusable dust bag
- Powerful max air volume of 40L/s for heavy duty applications
- Adjustable aluminium telescopic wand
- Convenient battery fuel gauge on hand control piece

Max. Sealed Suction	18kPa
Max. Air Volume	2.4m ³ /min
Tank Capacity	2L
Suction Power	195W, 100W, 55W, 25W
Continuous Runtime (Max)	14 minutes (Max suction) BL4050F
Overall Length	375mm
Skin Weight	3.4kg
Weight (With Battery)	4.7kg (BL4050F)
Voltage	40V Max

NEW



380mm Brush Width



40V Max Brushless UPRIGHT VACUUM

VC010G

- 5 Stage brush height adjustment to suit a range of floor types
- 380mm Brush width to cover more area
- 110W Suction power rivals AC performance
- 5L dust capacity with HEPA filter for 99.97% filtration
- Removable hand wand for detail cleaning on the go

Max. Sealed Suction	15kPa
Max. Air Volume	1.8m ³ /min
Tank Capacity	5L
Suction Power	110W, 50W, 25W
Continuous Runtime (Max)	25 minutes (BL4050F)
Overall Length	1,146mm
Skin Weight	7.3kg
Weight (With Battery)	8.6kg
Voltage	40V Max

STICK VACUUM



40V Max Brushless STICK VACUUM

CL001G

- Lightweight at only 1.7kg with BL4025
- HEPA filter provides high filtration rate of 99.97%
- Powerful max sealed suction of 21kPa
- 4 stage push button for optimal runtime & suction control
- High efficiency Brushless motor for 20 minutes runtime with BL4040

Max. Sealed Suction	21kpa
Max. Air Volume (m ³ /min)	1.2m ³ /min
Tank Capacity	730mL
Suction Power	125W, 70W, 45W, 20W
Continuous Runtime (Max)	25 minutes (BL4040)
Overall Length	1,066mm
Skin Weight	0.9kg
Weight (With Battery)	1.7kg (BL4025)
Voltage	40V Max



40V Max Brushless STICK VACUUM

CL002G

- Lightweight at only 1.7kg with BL4025
- 500mL reusable cloth dust bag
- Powerful max sealed suction of 21kPa
- 4 stage push button for optimal runtime & suction control
- High efficiency Brushless motor for 25 minutes runtime with BL4040

Max. Sealed Suction	21kpa
Max. Air Volume (m ³ /min)	1.2m ³ /min
Tank Capacity	500mL
Suction Power	125W, 70W, 45W, 20W
Continuous Runtime (Max)	25 minutes (BL4040)
Overall Length	1,046mm
Skin Weight	1.0kg
Weight (With Battery)	1.7kg (BL4025)
Voltage	40V Max

40V Max Brushless STICK VACUUM

CL003G



- Cyclonic filtration for reduced maintenance and ease of disposal
- HEPA filter provides high filtration rate of 99.97%
- Powerful max sealed suction of 20kPa
- 4 stage push button for optimal runtime & suction control
- High efficiency Brushless motor for 25 minutes runtime with BL4040

Max. Sealed Suction	20kpa
Max. Air Volume (m ³ /min)	1.0m ³ /min
Tank Capacity	440mL
Suction Power	100W, 60W, 35W, 15W
Continuous Runtime (Max)	25 minutes (BL4040)
Overall Length	1,086mm
Skin Weight	1.1kg
Weight (With Battery)	1.9kg (BL4025)
Voltage	40V Max

NEW

40V Max / 18V 450mm (17-3/4") JOBSITE FAN

CF003G



- Automatic oscillating fan increases airflow dispersion
- Powered by a single 40V Max XGT or 18V LXT battery or AC power
- 300m/min maximum air speed with variable speed control dial
- Off timer function with 1, 2 and 4 hour settings

Fan Diameter	450mm
Max. Wind Velocity	96 - 300m/min
Max. Air Volume	38 - 120m³/min
Overall Length	770mm
Skin Weight	7.9kg
Weight (With Battery)	8.9kg (BL4040)
Voltage	40V Max / 18V / AC



40V Max 330mm (13") JOBSITE FAN

CF002G

- Automatic oscillating fan increases airflow dispersion
- Powered by either 40V XGT batteries or AC power
- 240m/min maximum air speed with 3 wind speed settings
High / Medium / Low
- Off timer function with 1, 2 and 4 hour settings
- Quiet running noise level of only 52dB due to redesigned fan blades

Fan Diameter	330mm (13")
Max. Wind Velocity	240m/min
Max. Air Volume	21m³/min
Overall Length	602mm
Skin Weight	3.8kg
Weight (With Battery)	4.8kg (BL4040)
Voltage	40V Max



40V Max 235mm (9-1/4") JOBSITE FAN

CF001G

- Automatic oscillating fan increases airflow dispersion
- Powered by either 40V XGT batteries or AC power
- 190m/min maximum air speed with 3 wind speed settings
High / Medium / Low
- Off timer function with 1, 2 and 4 hour settings
- Quiet running noise level of only 48dB due to redesigned fan blades

Fan Diameter	235mm (9-1/4")
Max. Wind Velocity	190m/min
Max. Air Volume	8.2m³/min
Overall Length	333mm
Skin Weight	2.0kg
Weight (With Battery)	3.0kg (BL4040)
Voltage	40V Max

COOLER & WARMER



40V Max / 18V 50L COOLER & WARMER

CW002G

- Cooling temperatures between 10°C and -18°C and warming to 60°C
- Powered by 40V Max or 18V battery, 12V car charger or AC power
- Runtime of up to 24.5 hours with 2x 5.0Ah 40V Max batteries in cooling at 5°C (normal fridge temperature)
- Durable design with IPX4 water resistance
- 50L capacity allows for storage of approx. 30x cans or 15x 2L bottles

Cooling Capacity	-18°C to 10°C
Warming Capacity	30 - 60°C
Internal Capacity	50L
Water Resistance	IPX4
Runtime (2x 40V Max 5.0Ah Batteries)	10 hours at -18°C 24.5 hours at 5°C 6 hours at 60°C
Cooling System	Compressor
Overall Length	867mm
Skin Weight	25.2kg
Weight (With Battery)	27.8kg (2x BL4050F)
Voltage	40V Max XGT, 18V LXT, 12V Automotive & AC

40V Max / 18V 7L COOLER & WARMER

CW003G



NEW



40V Max / 18V 29L Dual Zone COOLER & WARMER

CW004G

- Dual temperature zones with partition, set 2 independent temperatures up to 30°C apart
- Cooling temperatures between 5°C and -18°C and warming to 60°C
- Powered by a single 40V Max XGT or 18V LXT battery, 12V car charger or AC power
- Runtime of up to 24 hours with 1x 8.0Ah 40V Max batteries in cooling at 5°C (normal fridge temperature)
- Durable design with IPX4 water resistance

Cooling Capacity	-18°C to 10°C
Warming Capacity	15 - 60°C
Internal Capacity	29L
Water Resistance	IPX4
Runtime (1x 40V Max 8.0Ah Batteries)	10 hours at -18°C 24 hours at 5°C 9.25 hours at 60°C
Cooling System	Compressor
Overall Length	676mm
Skin Weight	17.1kg
Weight (With Battery)	18.1kg (BL4040)
Voltage	40V Max XGT, 18V LXT, 12V Automotive & AC

- Cooling temperatures between 10°C and -18°C and warming to 60°C
- Powered by 40V Max or 18V battery, 12V car charger or AC power
- Runtime of up to 27 hours with 1x 8.0Ah 40V Max batteries in cooling at 5°C (normal fridge temperature)
- Durable design with IPX4 water resistance
- 7L capacity allows for storage of approx. 9x cans

Cooling Capacity	-18°C to 10°C
Warming Capacity	30 - 60°C
Internal Capacity	7L
Water Resistance	IPX4
Runtime (2x 40V Max 5.0Ah Batteries)	11.5 hours at -18°C 27 hours at 5°C 11.5 hours at 60°C
Cooling System	Compressor
Overall Length	456mm
Skin Weight	7.5kg
Weight (With Battery)	8.5kg (BL4040)
Voltage	40V Max XGT, 18V LXT, 12V Automotive & AC



500W Max. Output

40V Max MICROWAVE MW001G

- Dual stage maximum power output for heating and defrosting food
- Powered by a single 40V Max XGT battery there are dual battery terminals for extended runtime
- Runtime at 500W (2x 4.0Ah Batteries) 15mins & (2x 8.0Ah Batteries) 36mins
- Durable design with tempered glass door and dust and water resistant construction
- USB output port for charging mobile devices



Capacity	8 Litres 255 x 241 x 120mm
Power Output	High: 500W, Low: 350W
Continuous Runtime (Max)	2x BL4040: 15mins 2x BL4080F: 35mins
USB Charging Port	Yes - 1 Port (2.4A)
Overall Dimensions	318 x 343 x 338mm
Skin Weight	8.9kg
Weight (With Battery)	9.9kg (BL4040)
Voltage	40V Max

KETTLE / INFLATOR / AIR COMPRESSOR



40V Max KETTLE

KT001G

- 800mL water capacity
- Durable dual layer design insulates inside while keeping outside cool
- Tip over spill guard prevents hot water spill if kettle is knocked over
- Safety auto shut off with boil dry protection
- 8 minute boiling time at 23°C water temperature

Tank Capacity	161psi
Boiling Time	8 minutes (23°C water) 9 minutes (10°C water)
Runtime	1.1L (with BL4040)
Overall Length	233mm
Skin Weight	2.0kg
Weight (With Battery)	3.0kg (BL4040)
Voltage	40V Max



40V Max INFLATOR

MP001G

- 160psi maximum air pressure for inflating a wide variety of equipment
- Large digital backlit display, shows current and target air pressure
- Decompression function for reducing the current air pressure
- High discharge volume at 17L/min for fast inflation times
- Auto-stop function, inflator shuts down once target pressure is achieved

Max Air Pressure	161psi
Discharge Amount	At 29psi - 24L/min At 100psi - 12L/min At 161psi - 7L/min
Duty Cycle	10 minutes ON / 5 minutes OFF
Overall Length	272mm
Skin Weight	2.2kg
Weight (With Battery)	3.2kg (BL4040)
Voltage	40V Max

40V Max Brushless AIR COMPRESSOR

AC001G

NEW



- High airflow at 34L/min in a compact light weight design for maximum portability
- Low noise design at only 68dB for comfortable use indoors
- High durability roll-cage construction provides protection to withstand jobsite environments
- Up to 1,400x 50mm 18Ga nails continuously driven on a single 8.0Ah
- Rapid 100 second full tank fill from empty

Tank Size	7.6L
Air Flow	34L/min at 90PSI
Max Outlet Pressure	135PSI
Duty Cycle	50%
Noise	68dB
Recovery Time	100 seconds
Pump Type	Oil Free
Overall Length	302mm
Skin Weight	10.9kg
Weight (With Battery)	11.9kg (BL4040)
Voltage	40V Max

40V Max Digital Bluetooth JOBSITE RADIO



MR007G

- Audio Modes: Digital Radio, Bluetooth & FM radio frequency
- High quality sound produced by 2 stereo speakers and subwoofer
- Powered by 40V Max, 18V, 12V Max or AC power
- Durable design with an IP65 rating protection against dust & water
- Runtime up to 20 hours with an optional 4.0Ah battery (BL4040)

Continuous Runtime	40V Max 4.0Ah: 19 hours 18V 6.0Ah: 20 hours
Practical Max. Output	40V Max: 5W x 2 + 25W 18V: 5W x 2 + 25W
Frequency Band	FM: 87.5 -108 / DAB+
Bluetooth Range	Max. 30m, Optimum 10m
Overall Length	285mm
Skin Weight	5.3kg
Weight (With Battery)	6.3kg (BL4040)
Voltage	40V Max, 18V, 12V Max or AC Power

40V Max Bluetooth JOBSITE RADIO



MR005G

- Audio Modes: Bluetooth, AM & FM radio frequencies
- Group chain allows you to link up to 10 speakers for ultimate wireless sound*
- High quality sound produced by 2 stereo speakers and subwoofer
- Powered by 40V Max, 18V, 12V Max or AC power
- Durable design with an IP65 rating protection against dust & water

*Only on applicable models with this feature

Continuous Runtime	40V Max 4.0Ah: 19 hours 18V 6.0Ah: 20 hours
Practical Max. Output	40V Max: 5W x 2 + 25W 18V: 5W x 2 + 25W
Frequency Band	AM: 520 -1,710kHz FM: 87.5 -108MHz
Bluetooth Range	Max. 30m, Optimum 10m
Overall Length	285mm
Skin Weight	5.4kg
Weight (With Battery)	6.4kg
Voltage	40V Max, 18V, 12V Max or AC Power

40V Max Bluetooth JOBSITE RADIO



MR002G

- Audio Modes: Bluetooth, AM & FM radio frequencies
- High quality sound with 2 large 89mm speakers
- Durable design with an IP65 rating protection against dust & water
- Powered by 40V Max, 18V, 12V Max or AC power
- Runtime up to 53hours with an optional 4.0Ah battery (BL4040)

Continuous Runtime	40V Max 4.0Ah: 27.5 hours 18V 6.0Ah: 27.5 hours
Practical Max. Output	40V Max: 5Wx2 18V: 3.5Wx2
Frequency Band	AM: 520 - 1,710kHz FM: 87.5 - 108MHz
Bluetooth Range	Max. 30m, Optimum 10m
Overall Length	298mm
Skin Weight	4.3kg
Weight (With Battery)	5.3kg (BL4040)
Voltage	40V Max, 18V, 12V Max or AC Power

40V Max JOBSITE RADIO



MR001G

- Audio Modes: AM & FM radio frequencies
- High quality sound with 2 large 89mm speakers
- Durable design with an IP65 rating protection against dust & water
- Powered by 40V Max, 18V, 12V Max or AC power
- Runtime up to 53hours with an optional 4.0Ah battery (BL4040)

Continuous Runtime	40V Max 4.0Ah: 30 hours 18V 6.0Ah: 31 hours
Practical Max. Output	40V Max: 5Wx2 18V: 3.5Wx2
Frequency Band	AM: 520 - 1,710kHz FM: 87.5 - 108MHz
Overall Length	298mm
Skin Weight	4.3kg
Weight (With Battery)	5.3kg (BL4040)
Voltage	40V Max, 18V, 12V Max or AC Power

RADIO LANTERN / ADAPTOR / DUST BLOWER



40V Max Bluetooth Digital RADIO LANTERN

MR009G

- Audio Modes: Digital Radio, Bluetooth & FM radio frequency
- High brightness lantern with 4 light modes Full 360° / 270° / Flashlight / Strobe
- Colour temperature switching between daylight and warm light
- USB port for mobile device charging
- Runtime up to 15 hours running radio and lantern with an optional 4.0Ah battery (BL4040)

Continuous Runtime	Radio & 360° Lantern 10 hours (2.5Ah) 14 hours (4.0Ah)
Frequency Band	DAB+ FM: 87.5 - 108MHz
Bluetooth Range	Max. 30m, Optimum 10m
Overall Length	295mm (BL4040)
Skin Weight	1.0kg
Weight (With Battery)	2.0kg (BL4040)
Voltage	40V Max



40V Max USB CHARGING ADAPTOR

ADP001G

- Twin USB output ports providing 2.4A each of charging power
- Manual On and Off switch improving battery consumption
- USB Output protection covers, improving port durability

Max Output Current	One Port: 2.4 Amps Two Ports: 4.8 Amps
Number of Ports	2
Overall Length	96mm
Skin Weight	0.14kg
Weight (With Battery)	1.14kg (BL4040)
Voltage	40V Max



40V Max Brushless DUST BLOWER

AS001G

- Maximum air velocity up to 200m/s wind speeds
- 4 stage electronic speed control to suit a variety of applications
- Continuous runtime up to 50mins with optional BL4025
- Tool-less nozzle change with nozzles available for a variety of applications

Max. Air Volume	1.1m³/min
Max. Air Velocity	200m/sec
Blowing Force	2.8N
Max. Sealed Suction	10.3kPa
Overall Length	181mm
Skin Weight	0.9kg
Weight (With Battery)	1.9kg (BL4040)
Voltage	40V Max
Compatible Batteries	BL4025* / BL4040* / BL4050F *Recommended

Standard Accessories

191X19-5

Wide
Range
Nozzle



191X11-1

Confined
Space
Nozzle



191X13-7

Dusting
Nozzle



191X15-3

Blowing
Nozzle



191X17-9

Pinch
Valve
Nozzle



40V Max / 18V High Brightness LED WORKLIGHT

ML009G



- High brightness white LED's provide 10,000Lm of brightness
- Powered 40V Max XGT or 18V LXT Batteries
- High durability IP65 rated for protection against water and dust
- Runtime up to 2.4 hours (High) when powered by 2x optional 4.0Ah battery
- Lighting coverage 9.7m in front and 11.4m wide

Lighting Coverage	9.7m front, 11.4m wide
Continuous Runtime	High: 2.4 hours (4.0Ah) Med: 6.5 hours (4.0Ah) Low: 14 hours (4.0Ah)
Luminous Flux	High: 10,000lm, Med: 4,000lm, Low: 2,000lm
Illuminance (At 1m)	High: 4,300lx, Med: 1,900lx, Low: 1,000lx
Overall Length	386mm
Skin Weight	6.1kg
Weight (With Battery)	7.1kg (BL4040)
Voltage	40V Max



40V Max LED WORKLIGHT

ML005G

- High brightness white LED's provide 3,600Lm of brightness
- Powered 40V Max XGT or 18V LXT Batteries
- High durability IP65 rated for protection against water and dust
- Runtime up to 3 hours (High) when powered by optional 4.0Ah battery
- Lighting coverage 6.0m in front and 6.4m wide

Lighting Coverage	6.0m front, 6.4m wide
Continuous Runtime	High: 3.5 hours (4.0Ah) Med: 7.5 hours (4.0Ah) Low: 15 hours (4.0Ah)
Luminous Flux	High: 3,600lm, Med: 1,800lm, Low: 900lm
Illuminance (At 1m)	High: 2,100lx, Med: 1,000lx, Low: 500lx
Overall Length	309mm
Skin Weight	4.6kg
Weight (With Battery)	5.6kg (BL4040)
Voltage	40V Max



40V Max LED WORKLIGHT

ML003G

- High brightness white LED's provide 1,100lm of brightness
- Powered 40V Max XGT or 18V LXT Batteries
- High durability IP56 rated for protection against water and dust
- Runtime up to 10 hours (High) when powered by optional 4.0Ah battery
- Head pivots 240° for optimal light angle direction

Continuous Runtime	High Mode: 10 hours (4.0Ah)
Luminous Flux	High: 1,100lm, Low: 450lm
Illuminance (At 50cm)	High: 1,900lx, Low: 800lx
Overall Length	249mm
Skin Weight	3.4kg
Weight (With Battery)	4.3kg (BL4040)
Voltage	40V Max

FLASHLIGHT / WORKLIGHT

NEW



40V Max LED Long Distance FLASHLIGHT

ML007G

- Long beam distance lights up objects 640 metres away
- 4 output modes; spot light, flood light, spot/flood and strobe
- High brightness neutral white LED's provide a maximum 1,250lm
- Continuous runtime up to 14 hours with optional 5.0Ah in spotlight mode
- Extreme Protection Technology (XPT) engineered for improved dust and water resistance for operation in harsh conditions

Continuous Runtime (4.0Ah BL4040)	Spot Light: 10 hours Flood Light: 10 hours Spot & Flood: 7.5 hours
Luminous Flux	Spot Light: 600lm Flood Light: 1,000lm Spot & Flood: 1,250lm
Illuminance (At 1m)	Spot Light: 82,000lx Flood Light: 520lx Spot & Flood: 60,000lx
Overall Length	330mm (BL4040)
Skin Weight	0.95kg
Weight (With Battery)	1.95kg (BL4040)
Voltage	40V Max



40V Max / 18V Upright Area WORKLIGHT

ML010G

- Rounded base design to ensure light remains upright even when knocked
- 3 stage brightness settings with Max. 5,500lm LED brightness
- Runtime on high with 2x 40V Max 8.0Ah: 13 hours or 2x 18V 6.0Ah: 4.5 hours
- IP54 rated for protection against dust and moisture*
- Powered by either 40V Max XGT, 18V LXT batteries or AC power

*Only when being used with batteries not AC power

Continuous Runtime (2x 18V 6.0Ah / 2x 40V Max 8.0Ah)	High: 4.5 / 13 hours Med: 8.5 / 23 hours Low: 16 / 43 hours
Luminous Flux	High: 5,500lm Medium: 3,000lm Low: 1,500lm
Illuminance (At 1m)	High: 550lx Medium: 300lx Low: 150lx
Overall Length	814mm
Skin Weight	14.11kg
Weight (With Battery)	15.11kg (BL4040)
Voltage	40V Max, 18V & AC



NEW



40V Max LED Compact FLASHLIGHT

ML011G

- Compact design for use in small spaces
- Dual direction lighting both horizontal and vertical
- USB output for charging mobile devices
- Two stage lighting output high: 300lm and low: 150lm
- Continuous runtime up to 37 hours on high with optional 4.0Ah battery

Continuous Runtime (4.0Ah BL4040)	37 hours (at 300lm) 64 hours (at 150lm)
Luminous Flux	Up & Side : 300lm Side only: 150lm Up only: 150lm
Illuminance (At 50cm)	Up & Side : 240lx Side only: 190lx Up only: 190lx
Overall Length	107mm
Skin Weight	0.19kg
Weight (With Battery)	1.19kg (BL4040)
Voltage	40V Max



40V Max LED FLASHLIGHT

ML001G

- 12 Position pivoting flashlight head swivels from 0 to 170 degrees
- 34hrs of continuous illumination/runtime on a 2.5Ah battery
- 4x 0.5W LEDs provide brightness of 160lm

Continuous Runtime	34 hours (2.5Ah) 55 hours (4.0Ah)
Luminous Flux	160lm
Illuminance (At 1m)	3,000lx
Overall Length	281mm
Skin Weight	0.28kg
Weight (With Battery)	1.3kg (BL4040)
Voltage	40V Max



40V Max LED TORCH

ML002G

- 360 degree illumination with 20 bright white LED's
- Up to 32hrs runtime on a 2.5Ah battery
- 20 x 2W LED produces 710lm of brightness
- USB output port, able to charge mobile devices with 2.1A max
- 3 stage LED brightness switch, full, half or single LED

Continuous Runtime	High Mode: 10 hours (2.5Ah) 16 hours (4.0Ah)
Luminous Flux	710lm
Illuminance (At 50cm)	340lx
Overall Length	425mm
Skin Weight	0.46kg
Weight (With Battery)	1.5kg (BL4040)
Voltage	40V Max




40V Max LED Rotating FLASHLIGHT

ML006G

- Flashlight head folds up and down plus rotates left to right
- High brightness white LED's provide 500lm of brightness
- Metal hang hook swivels 360° and folds away for extra convenience
- 3 stage brightness settings 500lm / 250lm / 100lm
- Runtime up to 20 hours (High) when powered by optional 4.0Ah battery

Continuous Runtime	High: 20 hours (4.0Ah) Med: 40 hours (4.0Ah) Low: 82 hours (4.0Ah)
Luminous Flux	High: 500lm, Med: 250lm, Low: 100lm
Illuminance (At 50cm)	High: 800lx, Med: 400lx, Low: 180lx
Overall Length	275mm
Skin Weight	0.42kg
Weight (With Battery)	1.42kg (BL4040)
Voltage	40V Max

VIBRATOR / MIXING DRILL

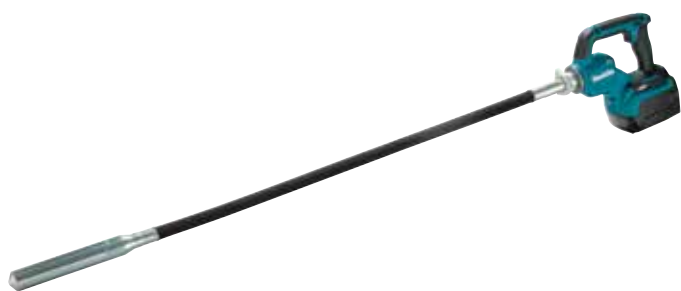

40V Max Brushless 1,200mm CONCRETE VIBRATOR

VR004G

- Dual power modes for a wide range of applications: Power mode & Standard
- Highly durable design with XPT for increased protection against dust and moisture
- 38mm shaft diameter and 1,200mm shaft length for high compaction performance
- Runtime of up to 40mins in standard & 25mins in power mode with optional 4.0Ah battery
- Constant Speed Control with lock on trigger switch

Vibration	Power mode: 15,500vpm Normal mode: 12,000vpm
Vibrator Diameter	Ø38mm
Flexible Shaft Length	1,200mm
Overall Length	1,439mm
Skin Weight	4.5kg
Weight (With Battery)	5.5kg (BL4040)
Voltage	40V Max



40V Max Brushless 2,400mm CONCRETE VIBRATOR

VR004G01

- Dual power modes for a wide range of applications: Power mode & Standard
- Highly durable design with XPT for increased protection against dust and moisture
- 38mm shaft diameter and 2,400mm shaft length for high compaction performance
- Runtime of up to 40mins in standard & 25mins in power mode with optional 4.0Ah battery
- Constant Speed Control with lock on trigger switch

Vibration	Power mode: 15,500vpm Normal mode: 12,000vpm
Vibrator Diameter	Ø38mm
Flexible Shaft Length	2,400mm
Overall Length	2,439mm
Skin Weight	5.9kg
Weight (With Battery)	6.9kg (BL4040)
Voltage	40V Max

40V Max Brushless MIXING DRILL

UT001G



- Heavy duty mixing power with a ø240mm maximum blade diameter
- 2-speed gearing with variable speed dial and trigger for optimum control
- Highly durable design with XPT for increased protection against water & dust
- Soft start reduces material splatter on start up
- Constant speed control maintains speed under load for consistent product mixing

Max. Blade Diameter	240mm
Spindle Thread	M14
No Load Speed	High: 0-920rpm Low: 0-500rpm
Overall Length	373mm
Skin Weight	4.97kg
Weight (With Battery)	5.97kg (BL4040)
Voltage	40V Max

EARTH AUGER / PRESSURE WASHER

NEW



40V Max Brushless EARTH AUGER

DG002G

- 2 speeds for effective drilling into a variety of materials
- Reverse switch allows for easy removal from material
- Max. drilling capacity of 200mm
- Earth auger handle allows for maximum control while drilling
- Torque limiter for added safety

Max. Power Output	1.35kW
Max. Drilling Diameter	Light Material: 200mm Heavy Material: 150mm
No Load Speed	Lo: 0 - 350rpm Hi: 0 - 1,400rpm
Overall Length	846mm
Skin Weight	6.1kg
Weight (With Battery)	7.4kg
Voltage	40V Max

Optional Accessories

E-07294 100mm x 800mm Earth Auger Adaptor & Locking Pin	E-07303 150mm x 800mm Earth Auger Adaptor & Locking Pin	E-07319 200mm x 800mm Earth Auger Adaptor & Locking Pin	E-07325 540mm Earth Auger Extension & Locking Pin

NEW



40V Max Brushless Pressure Washer PRESSURE WASHER

HW001G

- Self priming function
- Adjustable pressure function with 3 modes
- Max flow rate of 420L/h
- Compact trolley design for portability
- Convenient onboard accessory storage

Operating Pressure	Mode 1: 3.0MPa Mode 2: 5.5MPa Mode 3: 8.5MPa
Flow Rate	Mode 1: 3.0L/min Mode 2: 4.2L/min Mode 3: 5.5L/min
Hose Length	5m
Overall Length	520mm
Skin Weight	8.5kg
Voltage	40V Max



MIST BLOWER / BLOWER



40V Max Brushless Backpack MIST BLOWER

PM001G

- 15L tank with ergonomic backpack design
- Variable discharge rate adjustment
- 14.3m³/min Max air volume
- Up to 14m horizontal reach
- 3 Stage speed adjustment

Max. Spraying Distance	14m
Max. Air Volume	14.3m ³ /min
Spray Volume	180 - 1,400mL/min
Max. Air Velocity	64m/s
Liquid Tank Volume	15L
Overall Length	690mm
Dry Weight	11.9kg
Weight with Battery (Dry)	13.2kg (2x BL4050F)
Voltage	40V Max



40V Max Brushless BLOWER

UB001G

- Cruise control function with boost mode
- Powerful air speed up to 230km/h
- Up to 16m³/min of max air volume
- Lightweight design
- IPX4 Rated for increased resistance to water

No Load Speed	0 - 20,000rpm Turbo: 23,000rpm
Max. Air Volume	0 - 13.8m ³ /min Turbo: 16m ³ /min
Max. Air Speed	190km/h Turbo: 230km/h
Overall Length	1,043mm
Skin Weight	2.6kg
Weight (With Battery)	3.6kg (BL4040)
Voltage	40V Max



NEW



380mm

Operating Width



40V Max Brushless 380mm **LAWN SCARIFIER**

UV001G

- Working depth of +5mm down to -12mm for a range of applications
- Vertical cutting and de-thatching blades as standard
- 1.7kW Max output power to power through thick grasses
- Up to 41 minutes runtime with 2 x BL4080F batteries
- Constant speed control to maintain cutting efficiency

Max. Power Output	1.7kW
Working Width	380mm
Working Depth Adjustment	-12 to +5 (18 Stages)
No Load Speed	3,200rpm
Collection Capacity	50L
Skin Weight	20kg
Weight (With Battery)	22kg (2x BL4040)
Voltage	40V Max

LAWN MOWER



Self-Propelled Up to 5.0km/h



40V Max Brushless Self-Propelled 534mm LAWN MOWER

LM002G

- Quick to engage self-propelled motor with variable speed
- 534mm steel deck with 4 swing back blades
- No Load Speed of up to 2,800rpm
- 70L collection capacity with mulching & rear discharge
- 10 stage height adjustment from 20-100mm

Recommended Mowing Area	Self-Propelled – up to 2,500m ² Push – up to 3,400m ² <small>*Measured using 2x 8.0Ah 40V Max batteries, results may vary</small>
No Load Speed	2,800rpm 2,300rpm - Quiet Mode
Cutting Width	534mm
Cut Height Adjustment Range	20 - 100mm, 10 Heights
Blade Type	4 Swing Back Blades
Collection Capacity	70L
Overall Length	1,740mm
Skin Weight	31.6kg
Weight (With Battery)	35.4kg (2x BL4080F)
Voltage	40V Max

NEW



40V Max Brushless Self-Propelled 480mm LAWN MOWER

LM001G

- Quick to engage self-propelled motor with variable speed
- 480mm steel deck with 4 swing back blades
- No Load Speed of up to 3,200rpm
- 62L collection capacity with mulching & rear discharge
- 10 stage height adjustment from 20-100mm

Recommended Mowing Area	Self-Propelled – up to 2,100m ² Push – up to 2,600m ² <small>*Measured using 2x 8.0Ah 40V Max batteries, results may vary</small>
No Load Speed	3,200rpm 2,500rpm - Quiet Mode
Cutting Width	480mm
Cut Height Adjustment Range	20 - 100mm, 10 Heights
Blade Type	4 Swing Back Blades
Collection Capacity	62L
Overall Length	1,670mm
Skin Weight	30.1kg
Weight (With Battery)	33.9kg (2x BL4080F)
Voltage	40V Max



40V Max 430mm LAWN MOWER

LM004G

- Ideal for lawns up to 518m²
- 8 stage height adjustment from 20mm to 75mm
- No Load Speed of 3,600rpm
- 50L catcher with grass level indicator
- Mulching with plug & catching with cloth catcher

Recommended Mowing Area	518m ²
No Load Speed	3,800rpm
Cutting Width	430mm
Cut Height Adjustment Range	20-75mm, 8 heights
Blade Type	2 tooth bar blade
Collection Capacity	50L
Overall Length	1,440mm
Skin Weight	16.2kg
Weight (With Battery)	17.3kg (BL4050F)
Voltage	40V Max



BRUSHCUTTER



0-6,500rpm
No Load Speed



80V Max (40Vx2) Brushless U-Handle BRUSHCUTTER

UR012G

- 3 stage speed control up to 6,400rpm with reverse function
- Active feedback sensors shut down the tool in the event of a kickback
- Powerful brushless motor produces 2.0kW maximum output
- 35% faster drilling speed compared with the equivalent 18V model
- Easy to use control panel plus trigger operation

Max. Output	2.0kW
Max. Spindle Speed	Lo: 3,500rpm Med: 5,000rpm Hi: 6,400rpm
Shaft Type	Straight
Handle Type	U-Handle
Spindle Thread	M10 x 1.25LH
Noise	96dB
Overall Length	1,829mm
Skin Weight	6.7kg
Weight (With Battery)	9.3kg (2x BL4050F)
Voltage	80V Max (40Vx2)

LINE TRIMMER / BRUSHCUTTER



40V Max Brushless Loop Handle LINE TRIMMER

UR014G

- Variable speed control from 4,000 to 5,700rpm
- Forward or reverse rotation mode selection
- High Max power output of 1.5kW
- Active feedback technology reduces kickback
- Not compatible with metal or plastic blades

Max. Output	1.5kW
Max. Spindle Speed	0 - 4,000 - 5,700rpm
Shaft Type	Straight
Handle Type	Loop Handle
Spindle Thread	M10 x 1.25LH
Noise	93dB
Overall Length	1,908mm
Skin Weight	4.8kg
Weight (With Battery)	6.1kg (BL4050F)
Voltage	40V Max

40V Max Brushless U-Handle BRUSHCUTTER

UR013G

- Variable speed control from 3,500 to 6,700rpm
- Adjustable U-Handle grip for ergonomic use
- High Max power output of 1.5kW
- Active feedback technology reduces kickback
- Compatible with nylon cutting head, plastic or metal blades

Max. Output	1.5kW
Max. Spindle Speed	0 - 3,500 - 6,700rpm
Shaft Type	Straight
Handle Type	U-Handle
Spindle Thread	M10 x 1.25LH
Noise	95dB
Overall Length	1,916mm
Skin Weight	5.3kg
Weight (With Battery)	6.6kg (BL4050F)
Voltage	40V Max



BRUSHCUTTER



40V Max Brushless Loop Handle BRUSHCUTTER

UR007G

- 3 stage speed control up to 7,000rpm with reverse function
- Automatic Torque Drive Technology - increases torque under load
- Powerful brushless motor provides 1.0kW of max power output
- Active Feedback Technology protects against kickback
- 430mm cutting width with nylon cord

Max. Spindle Speed	Lo: 0 - 4,600rpm Med: 0 - 5,500rpm High: 0 - 7,000rpm
Shaft Type	Straight
Handle Type	Loop
Spindle Thread	M10 x 1.25LH
Noise	94dB
Overall Length	1,909mm
Skin Weight	4.0kg
Weight (With Battery)	5.3kg (BL4050F)
Voltage	40V Max



40V Max Brushless U-Handle BRUSHCUTTER

UR006G

- 3 stage speed control up to 7,000rpm with reverse function
- Automatic Torque Drive Technology - increases torque under load
- Powerful brushless motor provides 1.0kW of max power output
- Active Feedback Technology protects against kickback
- 430mm cutting width with nylon cord

Max. Spindle Speed	Lo: 0 - 4,600rpm Med: 0 - 5,500rpm High: 0 - 7,000rpm
Shaft Type	Straight
Handle Type	U-Handle
Spindle Thread	M10 x 1.25LH
Noise	94dB
Overall Length	1,909mm
Skin Weight	4.4kg
Weight (With Battery)	5.7kg (BL4050F)
Voltage	40V Max





40V Max Brushless Loop Handle BRUSHCUTTER

UR003G

- 3 stage speed control up to 6,500rpm with reverse switch
- Automatic Torque Drive Technology - increases torque under load
- Powerful brushless motor provides 0.55kW of max power output
- Active Feedback Technology protects against kickback
- IPX4 Rated for increased resistance to water

Max. Spindle Speed	Lo: 0 - 3,500rpm Med: 0 - 5,300rpm High: 0 - 6,500rpm
Shaft Type	Straight
Handle Type	Loop
Spindle Thread	M10 x 1.25LH
Noise	92dB
Overall Length	1,735mm
Skin Weight	3.4kg
Weight (With Battery)	4.7kg (BL4050F)
Voltage	40V Max



40V Max Brushless U-Handle BRUSHCUTTER

UR002G

- 3 stage speed control up to 6,500rpm with reverse switch
- Automatic Torque Drive Technology - increases torque under load
- Powerful brushless motor provides 0.55kW of max power output
- Active Feedback Technology protects against kickback
- U-handle design for comfortable use and increased maneuverability

Max. Spindle Speed	Lo: 0 - 3,500rpm Med: 0 - 5,300rpm High: 0 - 6,500rpm
Shaft Type	Straight
Handle Type	Loop
Spindle Thread	M10 x 1.25LH
Noise	92dB
Overall Length	1,735mm
Skin Weight	4.0kg
Weight (With Battery)	5.3kg (BL4050F)
Voltage	40V Max



CHAINSAW



Equivalent Performance to 40cc PETROL CHAINSAWS

40V Max Brushless 450mm CHAINSAW

UC013G

- Max output power equivalent to 40cc petrol saws
- Captive bar nut allows for efficient chainsaw maintenance
- Max chain speed of 25.5m/s for fast effective cutting
- Metal bar spike for additional safety and control
- High water resistance (IPX4) for use in all seasons

Chain Speed	25.5m/s
Max Output Power	1.6kW
Bar Size	450mm
Standard Chain	0.325" / 0.043"
Oil Tank Capacity	260mL
Overall Length	445mm
Skin Weight	4.51kg
Weight (With Battery)	3.81kg (BL4050F)
Voltage	40V Max





40V Max Brushless 300mm Telescopic **POLE SAW**

UA004G

- Telescopic design provides high reach over 4m
- Active Feedback sensing Technology (AFT) for added safety
- High Max power output of 1.5kW
- Integrated branch hook to easily remove cut branches
- Slim saw head design for improved maneuverability

Chain Speed	20m/s
Max Output Power	1.5kW
Bar Size	300mm
Standard Chain	3/8" / 0.043
Telescopic Range	0 - 1,232
Oil Tank Capacity	160mL
Overall Length	2516mm
Skin Weight	7.2kg
Weight (With Battery)	8.5kg (BL4050F)
Voltage	40V Max



40V Max Brushless 300mm Top Handle **CHAINSAW**

UC003G

- Lightweight at only 4.2kg with battery
- Top handle design with lanyard clip
- Max chain speed of 24m/s for fast effective cutting
- Captive bar nut allows for efficient chainsaw maintenance
- Metal bar spike for additional safety and control

Chain Speed	24m/s
Max Output Power	1.4kW
Bar Size	300mm
Standard Chain	3/8" / 0.043
Oil Tank Capacity	200mL
Overall Length	266mm
Skin Weight	2.5kg
Weight (With Battery)	3.5kg (BL4040)
Voltage	40V Max



HEDGE TRIMMER



40V Max Brushless 750mm HEDGE TRIMMER

UH009G

- Designed for precision trimming of dense hedges
- 3 stage speed control with reverse switch
- Max branch diameter of 21.5mm
- Low vibration design allows for maximum user comfort
- Rotating rear handle provides best grip whilst in use

Strokes per Minute	2,000 / 3,600 / 5,000spm
Blade Length	750mm
Tooth Interval	35mm
Max. Branch Diameter	21.5mm
Noise	97dB
Overall Length	1,275mm
Skin Weight	4kg
Weight (With Battery)	5kg (BL4040)
Voltage	40V Max



40V Max Brushless 600mm HEDGE TRIMMER

UH008G

- Designed for precision trimming of dense hedges
- 3 stage speed control with reverse switch
- Max branch diameter of 21.5mm
- Low vibration design allows for maximum user comfort
- Rotating rear handle provides best grip whilst in use

Strokes per Minute	2,000 / 3,600 / 5,000spm
Blade Length	600mm
Tooth Interval	35mm
Max. Branch Diameter	21.5mm
Noise	97dB
Overall Length	1,123mm
Skin Weight	3.8kg
Weight (With Battery)	4.8kg (BL4040)
Voltage	40V Max

21.5mm
Max. Branch Diameter





40V Max Brushless 750mm HEDGE TRIMMER

UH007G

- Designed for cutting thick, rough branches
- 3 stage speed control with reverse switch
- Max branch diameter of 25mm
- Low vibration design allows for maximum user comfort
- Rotating rear handle provides best grip whilst in use

Strokes per Minute	2,000 / 3,000 / 4,000spm
Blade Length	750mm
Tooth Interval	38mm
Max. Branch Diameter	25mm
Noise	97dB
Overall Length	1,275mm
Skin Weight	3.9kg
Weight (With Battery)	4.9kg (BL4040)
Voltage	40V Max



40V Max Brushless 600mm HEDGE TRIMMER

UH006G

- Designed for cutting thick, rough branches
- 3 stage speed control with reverse switch
- Max branch diameter of 25mm
- Low vibration design allows for maximum user comfort
- Rotating rear handle provides best grip whilst in use

Strokes per Minute	2,000 / 3,000 / 4,000spm
Blade Length	600mm
Tooth Interval	38mm
Max. Branch Diameter	25mm
Noise	97dB
Overall Length	1,123mm
Skin Weight	3.7kg
Weight (With Battery)	4.7kg (BL4040)
Voltage	40V Max



25mm
Max. Branch Diameter

MULTI-FUNCTION POWERHEAD



1.0kW
Max. Output



40V Max Brushless Multi-Function **POWERHEAD**

UX01G

- Compatible with a wide range of attachments
- 3 stage speed control
- No Load Speed of up to 9,700rpm
- Easy installation and replacement of attachments
- Active Feedback Technology prevents kickback

Engine Power	1kW
No Load Speed	Lo: 0 - 5,700rpm Med: 0 - 8,200rpm Hi: 0 - 9,700rpm
Overall Length	1,027mm
Skin Weight	3.5kg
Weight (With Battery)	4.5kg (BL4040)
Voltage	40V Max

MULTI-FUNCTION POWERHEAD



40V Max Brushless Multi-Function POWERHEAD POLE HEDGE TRIMMER

UX01GZ05

- Includes an Extension Pole and Hedge Trimmer Attachment
- Active Feedback sending Technology (AFT) for added safety
- 1kW Max output to power through to toughest tasks
- 3 speed selection (High/ Medium/ Low)
- Quick change between different attachments



40V Max Brushless Multi-Function POWERHEAD POLE SAW

UX01GZ06

- Includes an Extension Pole and Pole Saw Attachment
- Active Feedback sending Technology (AFT) for added safety
- 1kW Max output to power through to toughest tasks
- 3 speed selection (High/ Medium/ Low)
- Quick change between different attachments



40V Max Brushless Multi-Function POWERHEAD, POLE HEDGE & SAW

UX01GZ07

- Includes an Extension Pole, Hedge Trimmer and Pole Saw Attachment
- Active Feedback sending Technology (AFT) for added safety
- 1kW Max output to power through to toughest tasks
- 3 speed selection (High/ Medium/ Low)
- Quick change between different attachments



40V Max Brushless Multi-Function POWERHEAD & LINE TRIMMER

UX01GZ08

- Includes EM409MP Line Trimmer Attachment
- Active Feedback sending Technology (AFT) for added safety
- 1kW Max output to power through to toughest tasks
- 3 speed selection (High/ Medium/ Low)
- Quick change between different attachments

Optional Attachments

191E23-0 Extension Pole 	199509-8 420mm Straight Shaft Brushcutter 	191N47-0 330mm Straight Shaft Brushcutter 	191T37-9 300mm Pole Saw 	198057-4 Ground Trimmer 	196340-3 490mm Hedge Trimmer 
191P71-5 Blower 	196750-4 Edge Trimmer 	191M55-5 Rotary Scissor 	199187-4 Cultivator 	199326-6 Bristle Brush 	199347-8 Sweeper 

40V MAX

40V Max Brushless 2 PIECE COMBO KIT

DK0114G209



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless Impact Driver - TD001GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tote Bag - 832319-7

40V Max Brushless 2 PIECE COMBO KIT

DK0139G202



Includes:

- 40V Max Brushless 3/4" Impact Wrench - TW001GZ
- 40V Max Brushless 125mm (5") Paddle Switch Angle Grinder - GA013GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tote Bag - 832319-7

COMBO KITS

40V Max Brushless 3 PIECE COMBO KIT

DK0140G302



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless Impact Driver - TD001GZ
- 40V Max Brushless 125mm (5") Slide Switch Angle Grinder - GA005GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tote Bag - 199935-1

40V Max Brushless 3 PIECE COMBO KIT

DK0141G302



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless Impact Driver - TD001GZ
- 40V Max Brushless 125mm (5") Paddle Switch Angle Grinder - GA013GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tote Bag - 199935-1

40V MAX

40V Max Brushless 3 PIECE COMBO KIT

DK0133G302



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless 125mm (5") Slide Switch Angle Grinder - GA005GZ
- 40V Max Brushless Recipro Saw - JR001GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tote Bag - 199935-1

40V Max Brushless 3 PIECE COMBO KIT

DK0131G302



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless 3/4" Impact Wrench - TW001GZ
- 40V Max Brushless 125mm (5") Paddle Switch Angle Grinder - GA013GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tote Bag - 199935-1

COMBO KITS

40V Max Brushless 3 PIECE COMBO KIT

DK0146X1



Includes:

- 40V Max Brushless 3/4" Impact Wrench - TW001GZ
- 40V Max Brushless 125mm (5") Paddle Switch Angle Grinder - GA013GZ
- 18V Grease Gun - DGP180ZBK
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- 18V Battery Charging Adaptor for DC40RA - ADP10
- Tote Bag - 832319-7
- **BONUS:** 18V 3.0Ah Li-Ion Battery - BL1830B

40V Max Brushless 5 PIECE COMBO KIT

DK0144G502



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless Impact Driver - TD001GZ
- 40V Max Brushless 28mm Rotary Hammer - HR001GZ
- 40V Max Brushless 125mm (5") Slide Switch Angle Grinder - GA005GZ
- 40V Max Brushless 185mm (7-1/4") Circular Saw - HS003GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tool Bag - 832367-6

40V MAX

40V Max Brushless 6 PIECE COMBO KIT

DK0115G603



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless Impact Driver - TD001GZ
- 40V Max Brushless Recipro Saw - JR001GZ
- 40V Max Brushless 28mm Rotary Hammer - HR001GZ
- 40V Max Brushless 185mm (7-1/4") Circular Saw - HS003GZ
- 40V Max Brushless 125mm (5") Slide Switch Angle Grinder - GA005GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tool Bag - 832367-6

40V Max Brushless 6 PIECE COMBO KIT

DK0153G601



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless Impact Driver - TD001GZ
- 40V Max Brushless Recipro Saw - JR001GZ
- 40V Max Brushless 28mm Rotary Hammer - HR001GZ
- 40V Max Brushless 185mm (7-1/4") Circular Saw - HS003GZ
- 40V Max Brushless 125mm (5") Paddle Switch Angle Grinder - GA013GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tool Bag - 832367-6

COMBO KITS

40V Max Brushless 6 PIECE COMBO KIT

DK0191G601



Includes:

- 40V Max Brushless Hammer Driver Drill - HP001GZ
- 40V Max Brushless 1/2" Mid-Torque Impact Wrench - TW007GZ
- 40V Max Brushless 125mm (5") Paddle Switch Angle Grinder - GA013GZ
- 40V Max Brushless 185mm (7-1/4") Circular Saw - HS003GZ
- 40V Max Brushless 30mm Rotary Hammer - HR008GZ01
- 40V Max Brushless Orbital Recipro Saw - JR002GZ
- 40V Max 4.0Ah Li-Ion Battery x2 - BL4040
- 40V Max Single Port Rapid Charger - DC40RA
- Tool Bag - 832367-6

DIRECT CONNECT POWER SUPPLY

NEW

1,400W
Continuous Rating Output




Direct Connect POWER SUPPLY

BAC01

- Power supply provides 2,800W* peak and 1,400W continuous rating output
- Pure Sin Wave, smooth consistent AC output suitable for powering sensitive electronics
- Multiple output ports: 240V AC, USB and 12V automotive outlets
- Output indicator indicates output load reducing chance of overload
- Compatible devices, XGT and LXT chargers, small home appliances and mobile electronics

Inverter Capacity	Continuous Rating Output: 1,400W Max. Output: 2,800W*
Output Ports	2x AC Outlets 2x USB Type A 2x USB Type C 1x 12V Automotive Socket
Approx. Continuous Runtime	56mins at 1,000W (PDC1200)
Overall Length	395mm
Skin Weight	7.3kg
Weight (With Battery)	16.2kg (PDC1200)
Voltage	40V Max

*Rating value for 4 seconds

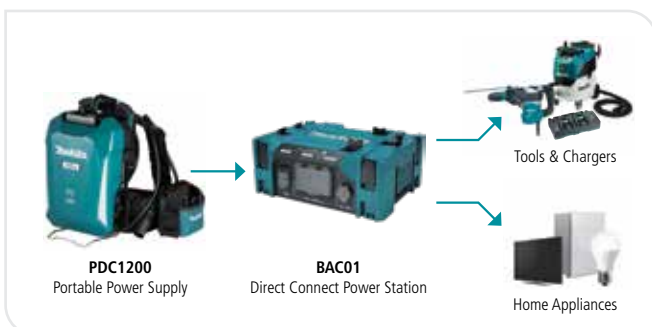

NEW



1206Wh POWER SUPPLY KIT

PDC1200

- Powers 36V Direct Connection tools simply by plugging in
- Available with LXT 18Vx2 or XGT 40V Max battery adaptor
- 1,206Wh for long runtimes
- AC charger has charging time of 360mins
- IPX4 Rated for increased resistance to water

Battery Fuel Gauge	Yes
Battery Capacity	33.5Ah
Energy Capacity	1,206Wh
Overall Length	369mm
Charging Time	360mins
Weight (With Battery)	8.8kg
Voltage	18Vx2 / 40V Max



1500Wh POWER SUPPLY KIT

PDC1500

- Powers 36V Direct Connection tools simply by plugging in
- Available with LXT 18Vx2 or XGT 40V Max battery adaptor
- 1,567Wh for long runtimes
- AC charger has charging time of 480mins
- IPX4 Rated for increased resistance to water

Battery Fuel Gauge	Yes
Battery Capacity	43.5Ah
Energy Capacity	1,567Wh
Overall Length	369mm
Charging Time	450mins
Weight (With Battery)	10.9kg
Voltage	18Vx2 / 40V Max





E-12790-5

355mm x 4.3 x 25.4

METAL CUT DISC



E-12996


355mm DIAMOND SEGMENT BLADE



EFFICUT Metal

THIN KERF

- ⌘ Less Resistance
- ⌘ Less Waste
- ⌘ Cermet Tip
- ⌘ Longer Life



NEW EFFICUT

- ⌘ Teeth Design
- ⌘ Longer Runtime
- ⌘ Faster Cutting



SILENCER DESIGN

- ⌘ Laser Etched
- ⌘ Resin Filled
- ⌘ Quieter Cutting





POWER WITHOUT LIMITS™



40V^{Li-ion} max 80V^{Li-ion} max



Single Port Rapid Charger



Dual Port Rapid Charger



2.5Ah



4.0Ah



5.0Ah



8.0Ah

5

YEAR

LIMITED
WARRANTY*

XGT LXI CXI

REGISTER YOUR TOOLS FOR EXTRA PROTECTION

Makita 5 year limited warranty on XGT cordless skins*

*Makita.com.au/MyMakita for details, terms & conditions