



GUN SAFE INSTRUCTIONS

Suitable for model numbers: SGUN9001, SGUN9002, SGUN0002, SGUN0003, SGUN0004, SGUN0005, GSB10, GSB14, GSB20, GSI3, GSI5 and GSI8



INSTALLING YOUR SAFE

Important:

- All safes should be bolted down to ensure the best possible security
- All safes come with pre-drilled holes in the floor and rear wall for bolt down options. If securing through the floor you will need to remove the anti-slip mat and reposition over the bolt heads once the safe is fixed in place.

If installing into a concrete or timber surface please follow the below steps:



1. Choose your desired location ensuring it is a flat & sturdy surface.

Please note: The safe must be mounted in an upright position with the door opening towards you like a microwave, **NOT** in a vertical position with the door opening towards the roof of your house.

2. **Concrete surface:** Use the provided masonry bolts. Mark & drill holes with a 14mm masonry drill bit.

Timber surfaces: Use the provided coach screws. Mark & drill a 5mm pilot hole.

3. Insert the masonry bolts or coach screws & tighten with a 16mm socket or adjustable wrench.

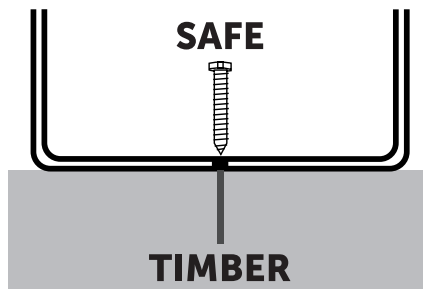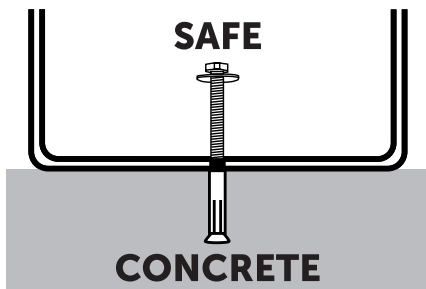

REPLACEMENT KEY PROCESS

To purchase a replacement key, fill out a "Key Request Form" available from the Bunnings Special Orders desk. You will need the following details:

- Serial number (positioned on the bottom right of the door).
- Key number (digits etched into the face of your key).

This replacement key process can take anywhere from 10-21 days depending on your location.




WARNING:

DO NOT STORE YOUR ACCESS KEYS INSIDE YOUR SAFE!

WARRANTY

Important: Please read the following to ensure maximum protection of your privacy & valuables:

- Check the packaging thoroughly to ensure you have all keys, instructions, etc. before throwing anything away.
- Read instructions completely and test the safe is in working order before installing.
- This safe must be installed in an upright position or the warranty will be void (please refer to the "Installing your safe" steps in this instruction booklet for more details).
- If you wish to clean your safe, use a damp cloth. Do not use liquid or sprayers.
- Never try to dismantle the product yourself.
- Keep keys and instructions in a secure place, **NOT** inside the safe.
- If you misplace your keys and require replacements, you will need to provide the above information with photo ID.
- A safe is an aid only in reducing theft. It must form only a part of a range of security measures used. Sandleford Holdings will not be held responsible for any loss or damage caused in the event of a theft or unauthorised use.

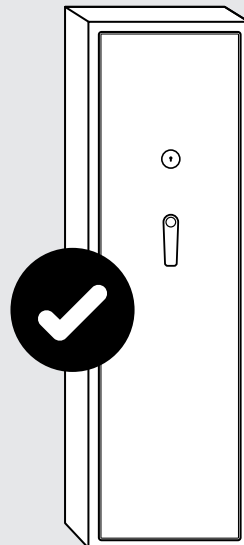

WARRANTY SUPPORT

Please fill in the following details and keep in a safe place for future reference:

Model of Safe:

Serial Number:

Emergency Key Number:

Support: Please refer to our website: www.sandleford.com.au



WARNING:

DO NOT STORE YOUR ACCESS KEYS INSIDE YOUR SAFE!