



# SAFEGUARD

## Thanks for Purchasing



**CARGO NETS**  
**HOW-TO-GUIDE**  
[www.safeguardnet.com.au](http://www.safeguardnet.com.au)



**3 YEAR**  
**WARRANTY**  
WITH ONLINE REGISTRATION





## Contents:

- What's in the bag
- Net Features
- Intended Use
- Instructions
- Warning
- Extending life
- Maintenance
- Contact us
- Leave a review



# WHAT'S IN THE BAG




Cargo Bag

How-To-Guide

Cargo Straps

Cargo Net

## NET FEATURES

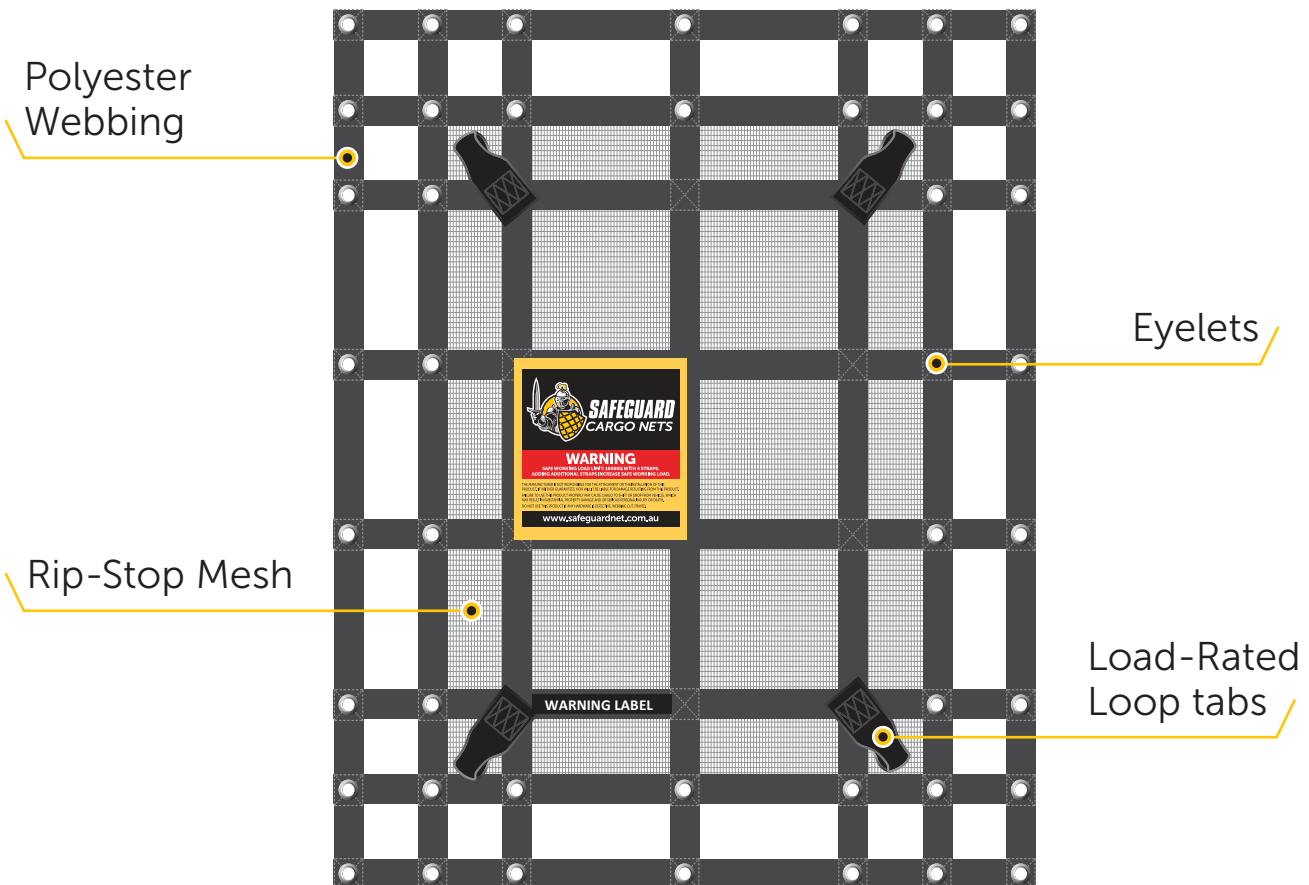

Polyester Webbing

Eyelets

Rip-Stop Mesh

Load-Rated Loop tabs

# INTENDED USE

The Safeguard Net is intended to be used in or on any vehicle transporting cargo from one place to another. It enhances safety for drivers, passengers, and others on highways and roadways. The Safeguard Net can be easily applied to any vehicle exterior or interior; truck or trailer bed, cabin interior, boat or aircraft and exterior cargo rack systems.

The Safeguard Net is designed to contain most loads if the vehicle is in a collision, where small and large items could be dislodged. It reduces cargo related accidents, driver liability, unnecessary risk and potential lawsuits. The Safeguard Net helps to protect our environment by not allowing items to escape during high winds or evasive maneuvers.



HOW TO  
INSTALL  
VIDEO LINK

## INSTRUCTIONS

### STEP 1 Throw the Safeguard Net over the load.



### STEP 2 Attach the karabiner to the point.



# INSTRUCTIONS



HOW TO  
INSTALL  
VIDEO LINK

**STEP 3** Attach the strap's hook to the tie rail.



**STEP 4** Tighten the strap by pulling down as shown.



**STEP 5** Hook the strap's end eyelet to karabiner to secure.



# WARNING

## OVERLOADING

Webbing restraint systems should not be overloaded, by using mechanical aids such as levers or bars (cheater bars) unless they are designed for use with the webbing restraint system.

## STABILITY OF LOAD

Care should be taken to ensure that the stability of the load is independent of the webbing restraint system and that the release of the webbing restraint system will not cause the load to shift, thus endangering personnel. If necessary, attach more straps for further support to the load before releasing the tensioning device in order to prevent accidental falling.

## LIMIT OF TWIST

Webbing restraint systems should not be used when knotted, and twisting of the webbing is prohibited; however, a half turn is allowable to prevent vibration and flapping.

## PROTECTION

The webbing restraint system should be protected against friction, abrasion and damage from loads with sharp edges, use protective sleeves, blankets or corner protectors.

## WITHDRAWAL AND REPAIR

Webbing restraint systems should be withdrawn from service and replaced or returned to the manufacturer for repair if they show the following signs of damage:

- (A) Webbing Tears, cuts, nicks and abrasions in load-bearing fibres and retaining stitches exceeding 10%, and deformations resulting in exposure to heat.
- (B) End fittings and tensioning devices deformations, cracks and pronounced signs of wear or corrosion. Only the manufacturer should carry out repairs on webbing restraint systems and on the webbing, any identification labels should be repaired.

## EXTENDING THE USEFUL LIFE

The life of lashing webbing and components can be extended by observing the following:

### (A) CARE AND MAINTENANCE

- (i) Never heat or heat treat the lashing components.
- (ii) Lightly oil the lashing components prior to prolonged storage.
- (iii) Store the lashing webbing and components in a clean dry place.
- (iv) Keep the tie-down as clean as possible and the ratchet free from dirt.
- (v) If contaminated with oil, fuel or acid, remove with hot soapy water.
- (vi) If contaminated with alkali, rinse thoroughly in cold water as soon as possible.

Do not allow the webbing to dry out before rinsing in water.

- (vii) If the ratchet mechanism becomes stiff in use, a small amount of lubricant applied to the moving parts will ease operation.

# EXTENDING THE USEFUL LIFE

## (B) USE

- (i) Ensure that the lashing webbing or components are free of any significant damage or wear.
- (ii) Avoid throwing from heights or leaving on the ground where vehicles may damage the metal fittings.
- (iii) Do not twist or knot the webbing.
- (iv) Use protective sleeves or other packing material to protect the webbing if it passes over sharp edges or rough surfaces.
- (v) Ensure the lashing webbing restraint system is evenly applied before tightening.
- (vi) When the lashing webbing is tensioned, ensure the force applied does not exceed the manufacturer's or suppliers recommendations.
- (vii) Ensure that there is even tension on all attachment webbing straps.

## MAINTENANCE

It is important that all components of the webbing restraint system should be examined regularly by the users prior to use. If there is any doubt about serviceability of the system, it should be withdrawn from use and examined by a competent person.

Take note of the following guidance:

- (A)** If necessary, the lashing webbing and components should be cleaned before they are inspected.
- (B)** The complete webbing system should be individually inspected for any signs of wear, twisting or stretching.
- (C)** Clearly mark the faults on all webbing restraint systems that have been withdrawn from service for evaluation.
- (D)** Any damaged webbing restraint system which cannot be repaired should be destroyed.

## SAFEGUARD NETS LOAD CAPACITY

### LOAD-RATING

Load-rating only applies when strap is attached.

1000kg with 6 straps

500kg with 4 straps attached. (Only on SUMN-200 & SUT-600)

Containment nets are for securing cargo, and a load rating can be achieved by adding Safeguard straps or a ratchet strap over the load.

The manufacturer is **NOT** responsible for the attachment or the installation of this product. It neither guarantees, nor will be liable for damage resulting from this product. Failure to use this product properly may cause cargo to shift or drop from vehicle, which may result in substantial property damage and or serious injury or death.

Do not use this product if any hardware is defective, webbing cut, frayed.

For technical assistance call **1800 20 88 66**



## REVIEWS



Thanks for purchasing a Safeguard Net and supporting an Australian Business.

If you had fantastic service from the team at Safeguard or rate the product we would love to hear from you.

Please review us on google as that will go a long way to helping us grow our business.



Thanks again and we hope you enjoy your Safeguard Net.

56 Enterprise Street, Svensson Heights

QLD 4670

1800 20 88 66

sales@activetrade.com.au