


CONCERTO HEATED BIDET SUITE

Plumber's Installation Guide

PACKAGE CONTENTS

Please ensure that all items below have been included in this Concerto Heated Bidet Suite and that all parts are undamaged prior to installation. If any items are damaged or missing, please contact Customer Support immediately.

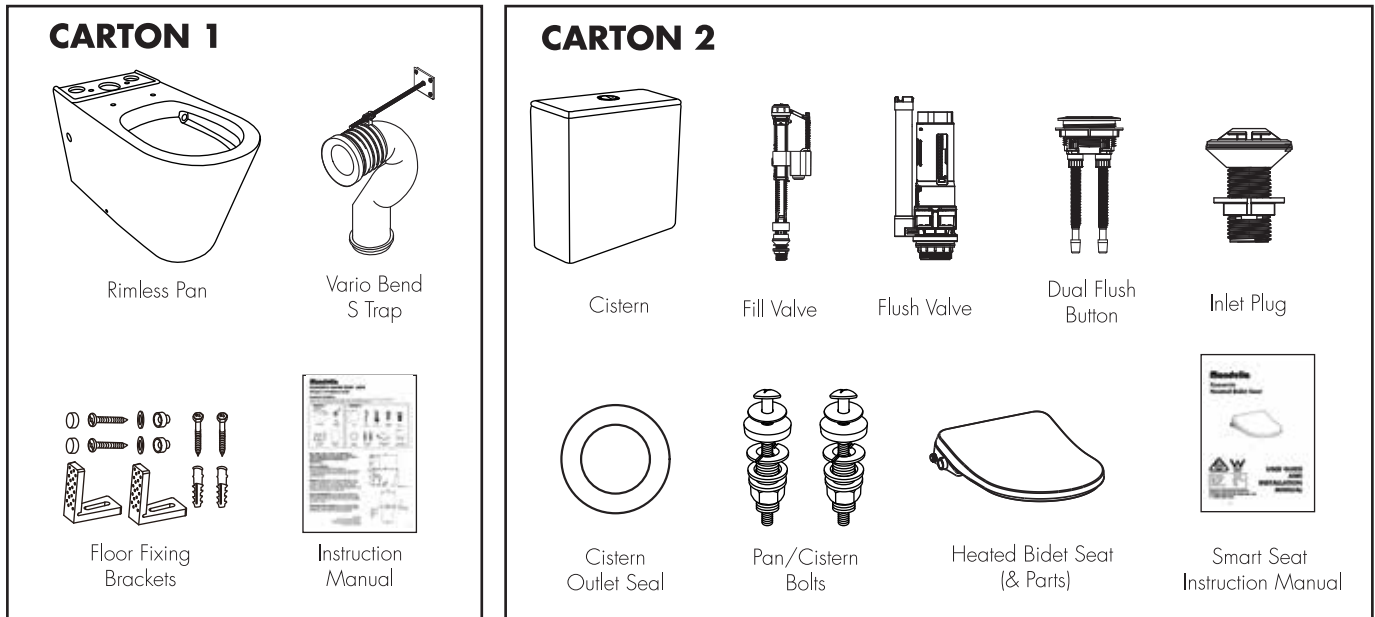

This toilet suite must be installed by a licensed plumber in accordance with local, State and National Standards and Regulations.



Before Installation

The Concerto Heated Bidet Suite requires the following setout for bottom entry installation as well as external connection requirements for water and power supply for the Heated Bidet Seat.

Setout 90-180mm setout for S trap and 180mm for P trap. This toilet is supplied with a vario bend S trap. Please note, a suitable P trap connection can be installed when required. Floor and wall must be perpendicular and the toilet must be installed on a level surface.

Smart Seat Plumbing The Concerto Heated Bidet Seat requires water supply on the left of the toilet so that a T valve and hose may be installed as part of the smart seat installation (see figure on right).













Smart Seat Power Supply The Concerto Heated Bidet Seat requires a power outlet to the right of the toilet that must be installed as per local, State and National regulations.

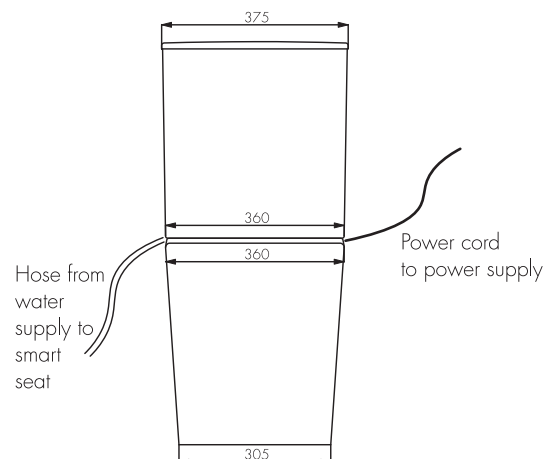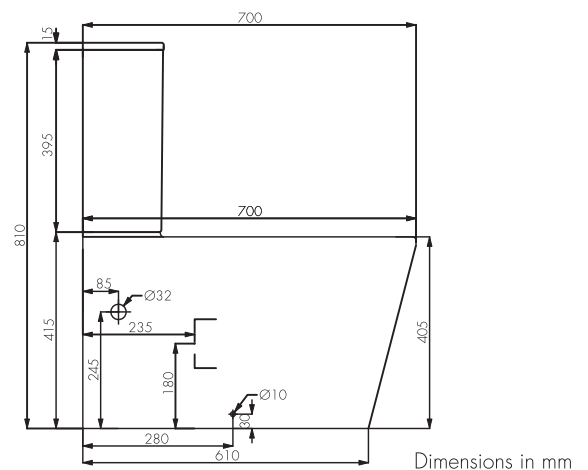

Please note:
Product measurements are subject to
some variance due to manufacturing process.
Always check physical product dimensions
prior to setout and installation.

Installation Guide

1. Install the floor fixing kit, excluding the external screws:
 - a) Place pan into position, tracing around the outside of the pan and marking floor alongside the two holes on either side of the pan.
 - b) Remove pan and mark points for bracket installation on inside of pan floor area and in line with pan holes from 1(a), allowing clearance for pan thickness (see Fig.2).
 - c) Drill holes into floor to required depth and apply wet area silicone into the holes and to base of floor bracket. Install the floor bracket using floor plugs, washers and screws supplied (Fig.3). Do not install external screws until Step 10.
2. Into the 2 holes in the top rear of the pan, install the pan spigots, washers and nuts (Fig.4) with the cistern to be attached in Step 7. Feed a flexible hose (not supplied) through bottom entry hole of pan and then continue to feed the hose out through the top of the pan.
3. For S trap installation, position the vario bend S Trap and determine whether trimming is required to meet pan outlet and waste connections (Fig 5). If trimming is required, measure the vario bend carefully, mark and then cut accordingly. Anchor vario bend to wall by measuring, marking, drilling and fixing (Fig.6).
4. Replace vario bend cover and install, ensuring that the connection points are secured correctly with a complete seal.
5. Install the Cistern Outlet Seal to base of cistern, over the outlet flush pipe (Fig.7).
6. Attach the flexible hose (from step 2) to the inlet valve connection on bottom of cistern. Please note the inlet valve position can be changed between right side and left side with the unused inlet valve to be sealed with the Inlet Plug supplied.
7. Using the Pan/Cistern Bolts provided, connect the cistern and pan together (Fig.8). If necessary, the outlet flush valve may be temporarily removed to make it more accessible to fix the pan and cistern bolts into place. Ensure the outlet flush valve is placed back into position.
8. Install flush button to cistern cover, adjusting toggles if needed (Fig.9).
9. Before fixing external screws into side of toilet, connect water supply and conduct several flush tests and ensure that there are no leaks.
10. Install external screws to fixing brackets within pan (Fig.10) and cover with white caps provided (Fig.11).
11. Complete installation of pan and cistern by sealing around base of toilet with a bead of wet area silicone and allow to dry before use (Fig.12).
12. For installation of Concerto Heated Bidet Seat, follow installation instructions (supplied separately).



www.mondella.com.au

Support & Technical Advice
Email: supportau@fgi-industries.com