



TPIK-025

Tank to Pump Installation Kit


These instructions are to be used as a guide only. The fittings & hose included in this kit will allow you to connect your rainwater tank to your pump. Additional fittings could be required depending on your pump installation requirements. Always read the instruction manual supplied with your pump for full details relating to safety instructions, assembly, operation and maintenance of your pump.

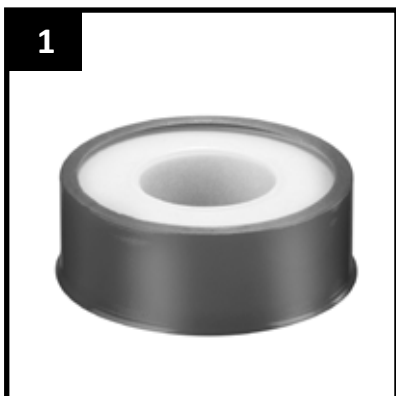


Teflon tape (included) is recommended on threads to ensure a water tight seal and prevent any leakage.

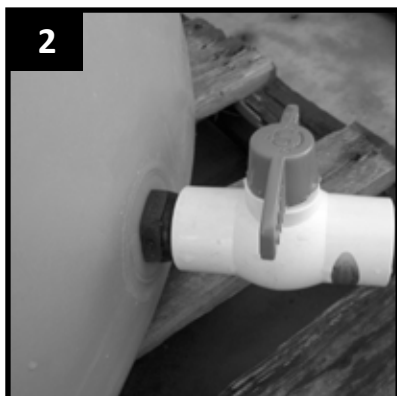

Connect the 25mm Ball Valve to the outlet of your rainwater tank.

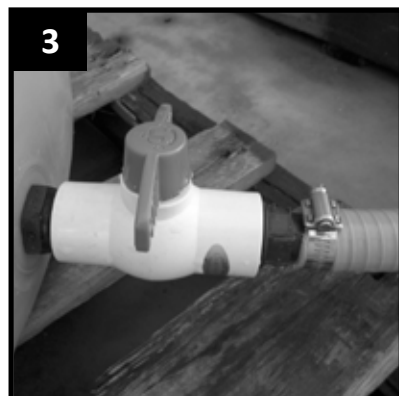

Screw one end of the Flexible Suction Hose onto the Ball Valve. (Check all hose clamps are fully tightened).

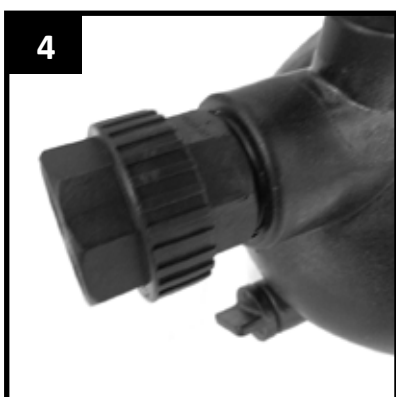

Screw the 25mm Threaded Connector into the inlet of your pump.




Screw the other end of the Flexible Suction Hose installed in step 3 into the 25mm Threaded Connector installed in step 4 to your pump.




Securely attach the 25mm Male Connector to the outlet of your pump.



Screw the 25mm end of the Thread Elbow onto the 25mm Male Connector installed in step 6. Screw a piece of pipe (not supplied) to the 20mm end of the Threaded Elbow.

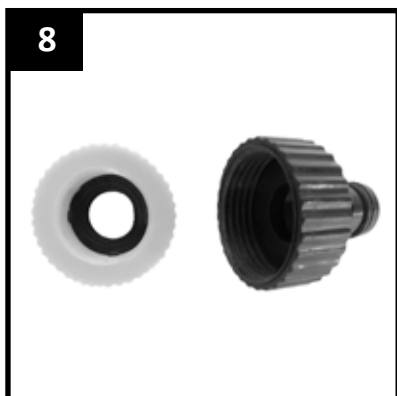

For connecting a tap (not supplied) to your garden hose with a click connector remove the 20mm insert from the Tap Adaptor and attached to your tap.

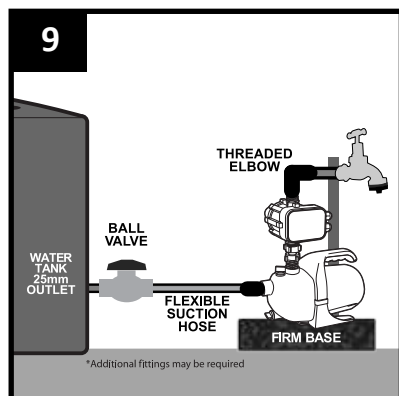

A tap (not supplied) may be equipped onto the end of pipe (not supplied) and secured to the ground with a metal or wooden stake for stability.