

PRODUCT DATA SHEET **EXH8R**











PRODUCT DESCRIPTION

Safely keep both hands on the job. The EX8HR headlamp offers excellent safety in any Ex-Zone 1/21 areas where flammable gases, vapours or dust clouds hazards occasionally occur. It's lightweight and comfortable to wear and features Ledlenser's patented3 Advanced Focus System for simple adjustment of the light beam's illumination area and throw distance. Best of all it's rechargeable.

TECHNICAL DATA			
Head diameter [mm]	41		
Weight incl. batteries [g]	342		
Weight without batteries [g]	266		
Focus function	Yes		
Head material	PC		
Tube material	PC		
Optic	Plastic lense (PMMA)		
Headband material	Elastic fabric		
Headband type	Side overhead headband		
Head movement type	Stepless movement		
Head movement angle [°]	55		
Headband specifications	Detachable,		
	Elastic,		
	Rubberised back,		
	Washable		

POWER SUPPLY			
Power source type	Rechargeable battery		
Battery quantity	1		
Battery type	Li-ion		
Battery description	1x18650 Battery Pack 3.7V		
Total battery voltage [V]	3.7		
Total battery capacity [mAh]	3250		
Total battery energy [Wh]	12		
Rechargeable	Yes		
Charging time [min]	660		
Energy status indicator	Charge Indicator		

EXPLOSION PROTECTION			
ATEX Certificate	Baseefa17ATEX0157		
IEC Ex Certificate	IECEx BAS18.0008		
Ex marking	II 2G Ex ib op is IIC T4 Gb		
	II 2D Ex ib op is IIIC T135°C Db		
Ex-Zone Gas	1		
Gas Group	IIA,IIB,IIC		
Temperature Class Gas	Т4		
Ex-Zone Dust	21		
Dust Group	IIIA,IIIB,IIIC		
Temperature Class Dust	135 °C		

FEATURES

- Magnetic Switch for easy operation with gloves and protective equipment
- First Ex lamp for Ex-Zone 1/21 with patented Advanced Focus System
- Focusable
- Dustproof and protected against powerful water jets (IP66)
- Red rear light as a position marker

FURTHER SPECIFICATIONS		
IP class	IP66	
Drop test (drop height) [m]	1	
Working temperature range [°C]	-20 to +40	

LIGHT FUNCTIONS

Low Power, Power

LIGHT SOURCE	
Amount LEDs	1
Color temperature [K]	6000 to 8000
Color rendering index (CRI)	65

LIGHT VALUE	S		
	Boost	Power	Mid Power Low Power
Light output [lm]		200	45
Beam distance [m]		130	60
Run time [h]		10	45

SWITCH

Magnetic Switch, Rotary Switch

FEATURES

Rear light

TECHNOLOGIES

Advanced Focus System

BOX CONTENTS

1 set of rechargeable batteries, Charging station, Power adaptor





WITH US, THE JOBS ARE SAFE. AT LEAST WHEN IT COMES TO THE LIGHT.

Anyone who works in potentially explosive environments must pay attention to safety when working with electronic devices.

The lights of the new Ledlenser EX and iL series fulfil both Ex and IECEx standards in every respect. Specially designed for contact with explosive gases, vapours and dust in the best possible IIC and IIIC groups.


They are both optimally impervious to dust and water and are certified in accordance with the Ex & IECEx directives.

The two series are thereby organised for different situations of explosion hazards. The EX series is suitable for use in working areas of Zone 0/20 & Zone 1/21 (rechargeable EX models only) and the iL series for use in working areas of Zone 2/22.²

Discover the new EX & iL lights from Ledlenser.



LEDLENSER SHINES A LIGHT ON EXPLOSION PROTECTION.

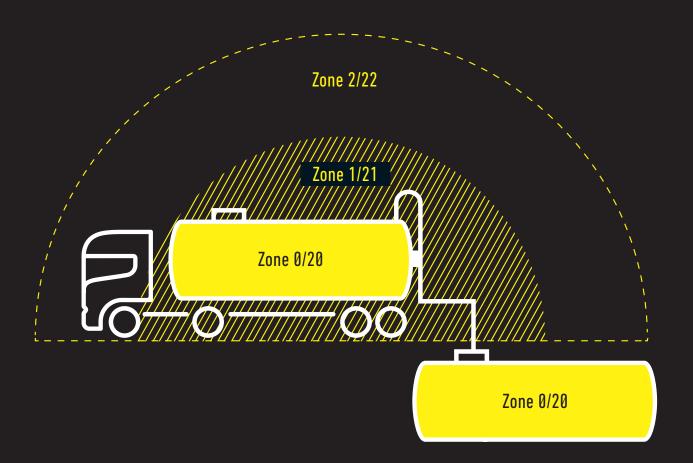

ZONE 0/20

Working areas in which explosive atmospheres in the form of flammable gases, vapours or dust clouds (e.g. in gas tanks or grain silos) prevail predominantly.

ZONE 1/21

Working areas in which explosive atmospheres in the form of flammable gases, vapours or dust clouds prevail occasionally.

ZONE 2/22

Working areas in which explosive atmospheres in the form of flammable gases, vapours or dust clouds (e.g. in case of a gas leak) usually do not prevail / prevail only for a short time.