

# JFLEX<sup>®</sup>

## DIGITAL TYRE INFLATOR

PART NO. 602045



### OPERATING INSTRUCTIONS

[JFLEX.COM.AU](http://JFLEX.COM.AU)



## OPERATION

1. Remove the valve core cap, connect the inflation chuck to the valve core, and ensure no air leakage.
2. **Tyre pressure detection:** The measured in-tyre pressure will be displayed once connected without the need to press the trigger.
3. **Inflating:** Hold the trigger and the inflator will inflate the tyre.
4. **Deflating:** Press the trigger halfway and the tyre will be deflated via the inflator.
5. The inflator will automatically shut off after 90 seconds of inactivity.
6. Press the operation button to turn on the backlight. The backlight will automatically turn off after 10 seconds.
7. Press and hold the operation button for 3 seconds to set different units of measurement: BAR / PSI / KPA.
8. Frequent use of the backlight will reduce the battery life. Replace the 2x AAA batteries if needed.
9. Working Pressure 0.5–12 Bar with the reading accuracy of 0.01 Bar and maximum inlet pressure of 15 Bar.

## WARNING

- To prevent personal injury, do not point the inflation chuck at any part of the body.
- Oil-water filter cotton should be changed based on actual usage. It is recommended to change every 6 months.
- Manufacturer reserves the right to change the technical specifications of the product without prior notice.


## CHANGING BATTERIES

1. Separate the soft rubber guard.
2. Remove the battery cover.
3. Change the batteries (2x AAA batteries required).
4. Replace the battery cover and soft rubber guard.

## REPLACING OIL AND WATER FILTER COTTON

1. Unscrew the connector with a wrench.
2. Remove the filter cotton and replace it.
3. Replace the connector.

# JFLEX<sup>®</sup>

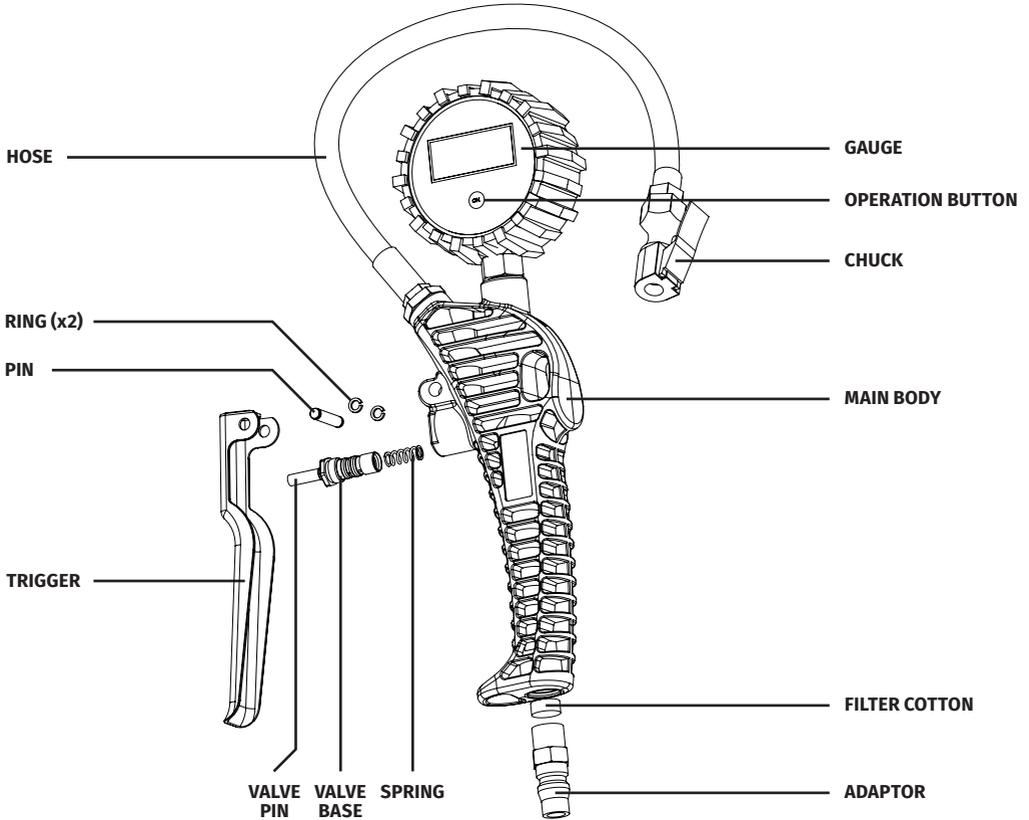

## SPECIFICATIONS

PART NUMBER	602045
SUPPLY PRESSURE MAX.	218 psi, 15 BAR, 1500 kPa
MAX. INFLATION	500L/MIN @ 174 psi
CHUCK TYPE	CLIP ON
CHUCK STYLE	SINGLE STRAIGHT
SCALE	7 – 174 psi, 0.5 – 12 BAR, 50 – 1200 kPa
INLET SIZE	1/4" FEMALE
HOSE LENGTH	0.35m RUBBER HOSE
ACCURACY	± 1 psi ACCORDING TO DIN EN12645:2015
BATTERY	2 x AAA
WARRANTY	1 YEAR

DISTRIBUTED BY TRADEPEM INDUSTRIAL PTY LTD

**JFLEX.COM.AU**