



MIMOSA®

# Installation Guide




# Bentota

## Side Table




Timber Look Aluminium Frame - Oak  
Ceramic Glass Table Top - Limestone



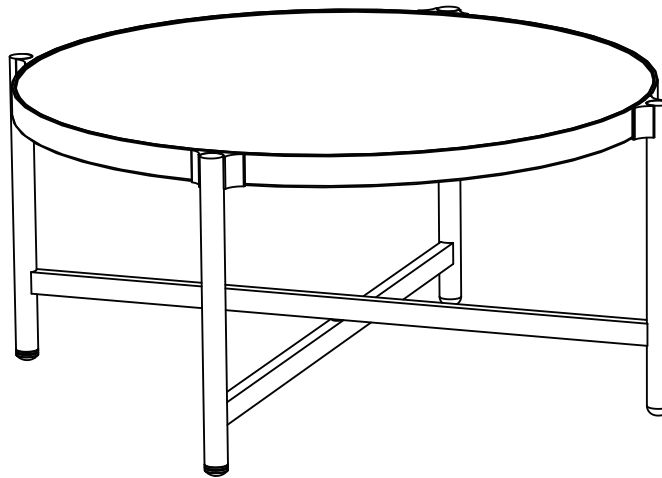

# Assembly Instructions



**Please carefully read the below warnings and instructions. Save the instructions for future reference.**


- 1. Please carefully read all instructions before assembly and use**
- 2. Please separate and identify all parts, ensuring that you have all parts listed**
- 3. To avoid damaging your table, it is recommended that you assemble it on a clean, protected surface**
- 4. Washers must be used when indicated during the assembly process**
- 5. Loosely tighten the nuts and then securely tighten when all are in position. Be careful not to over tighten the nuts during assembly.**

PARTS LIST		
CODE	PARTS	QTY.
<b>1</b>	 Table Top	1PC
<b>2</b>	 Leg tube bottom	1PC
<b>3</b>	 Leg tube top	1PC


HARDWARE LIST		
CODE	PARTS	QTY.
<b>A</b>	 M6x40mm	5PC
<b>B</b>	 Washer	5PC
<b>C</b>	 Allen Key	1PC
<b>D</b>	 Cap	5PC

# Assembly Instructions


- 1 Secure leg tube bottom (2) to table top (1), using bolt (A) and washer (B). Tighten bolts to 80%, using Allen key (C).

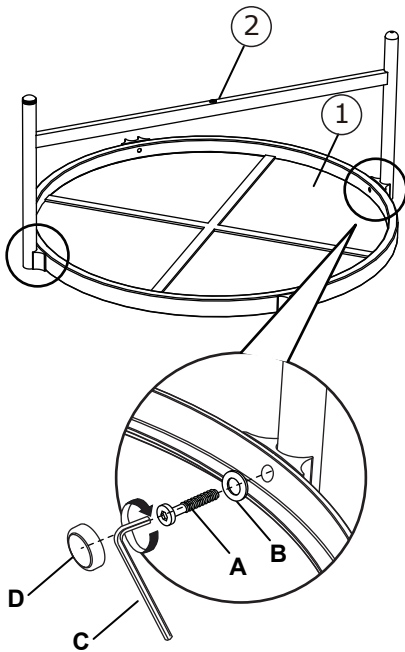

- 2 Secure leg tube top (3) to table top (1), using bolt (A) and washer (B). Tighten bolts to 80%, using Allen key (C). Once all bolts are in position, fully tighten and then cover with cap (D).

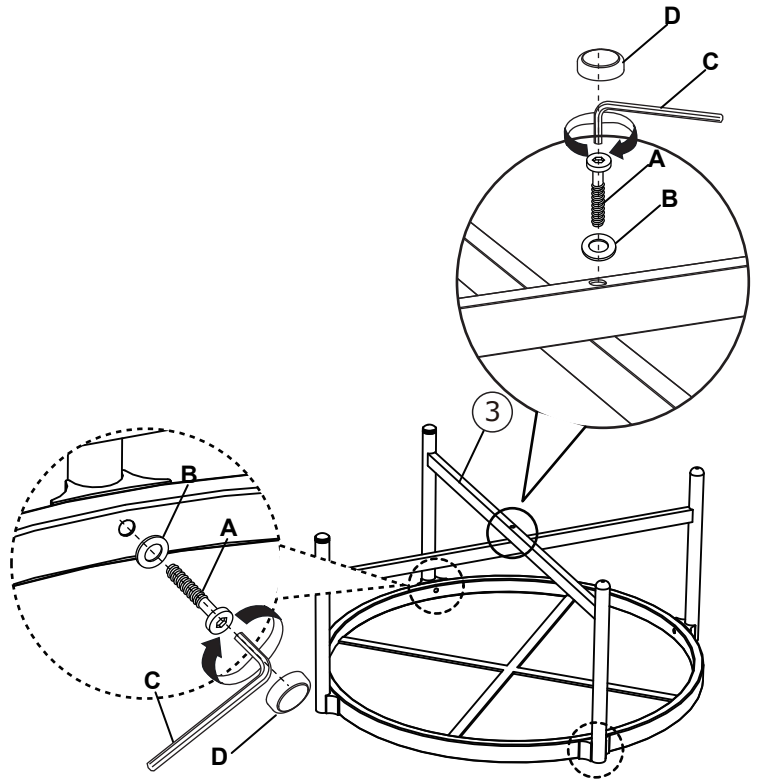

- 3 Turnover your table frame and place in desired location. If the surface is uneven, you can level the table with adjustable feet. Your table is now ready for use.

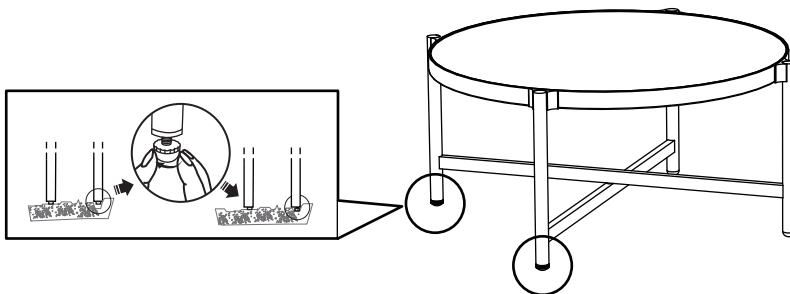

## CARE AND CLEANING:

1. TO CLEAN, WIPE WITH DAMP CLOTH. DO NOT USE BLEACH, ACID SOLVENTS OR ABRASIVE CLEANERS ON FRAME PARTS.
2. DURING VARYING WEATHER CONDITIONS AND WINTER PERIOD, WE STRONGLY RECOMMEND THAT IT CAN BE STORED IN A DRY AREA WITH A SUITABLE COVER BEFORE STORAGE, PLEASE ENSURE IT IS CLEAN AND DRY BEFORE STORAGE.
3. IN THE EVENT OF BARE METAL SHOWING DUE TO SCRATCH, IT IS PREFERRED TO TREAT WITH A RUST REPELLING VARNISH OR SIMILAR.
4. PERIODICALLY CHECK AND ENSURE THAT ALL THE SCREWS ARE COMPLETELY TIGHTENED.
5. A PROTECTIVE WEATHER COVER IS ENCOURAGED TO PROLONG THE LIFESPAN OF YOUR TABLE.