


stainless steel & aluminium SECURITY SCREEN DOOR

Installation Instructions




Components List

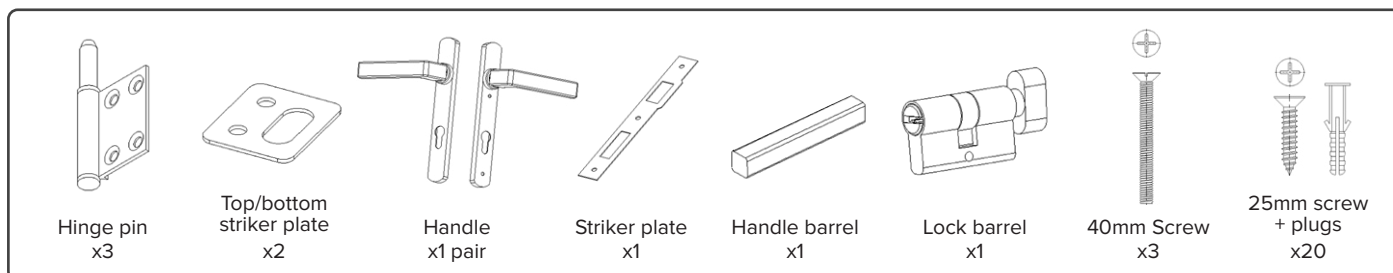


MEASURE DOOR OPENING

1. Measure height and width of door frame, ensuring it is square and suitable for the chosen door size.
2. This security door has a left-hand hinge when viewed from outside.
3. Hinges face the side that they open towards (i.e. when installing, the hinge will need to be on the left facing outside)
4. Check that the door handle will not hit the existing door


DOOR INSTALLATION

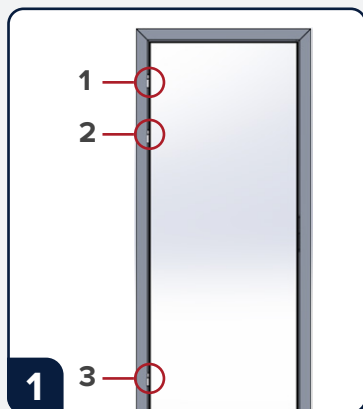

Mark door hinge position.
Chisel to depth if required

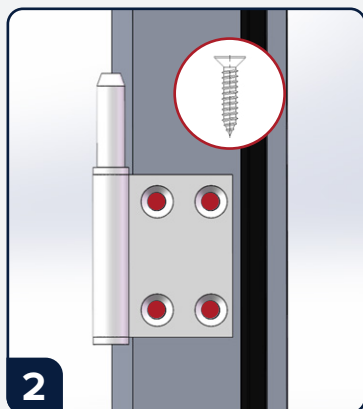



Pre-drill with 3.5mm bit and secure
hinge pin with 25mm screws provided

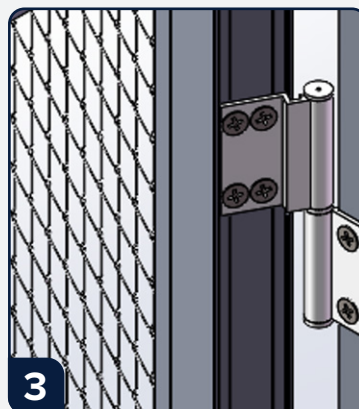

Secure door onto hinge pin

HANDLE INSTALLATION

1. Insert the handle barrel
2. Put the two handles together.
Ensure it is facing the correct way
3. Secure with 2x 40mm screws provided
4. Insert lock barrel through, ensuring the
key end is facing outside the home.
5. Secure with 1x 40mm screw provided

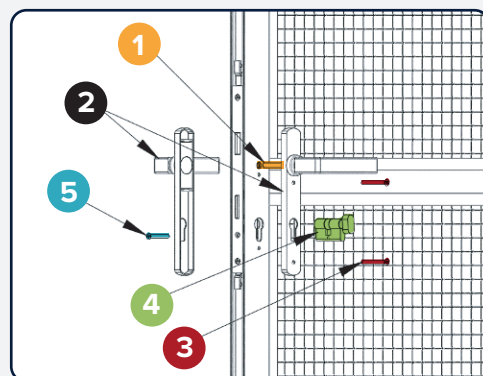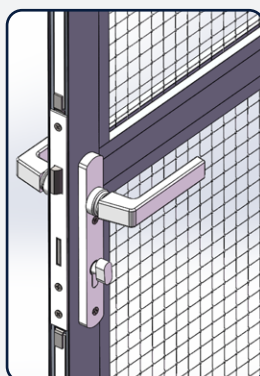




stainless steel & aluminium SECURITY SCREEN DOOR

Installation Instructions




STRIKER PLATE INSTALLATION


1. Mark position of the main lock bolt
2. Align striker plate and draw outline of the plate
3. Drill pilot hole and chisel to depth
4. Check that the door latch can be locked and unlocked
5. Secure striker plate with 25mm screws
6. Repeat for top and bottom bolt

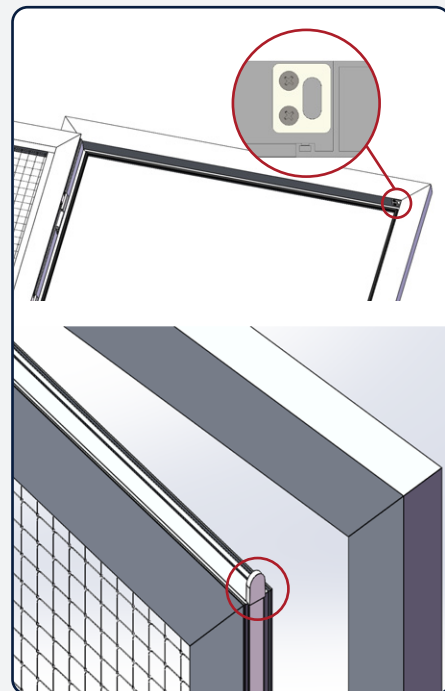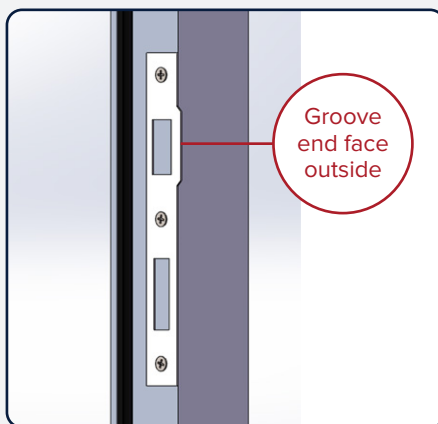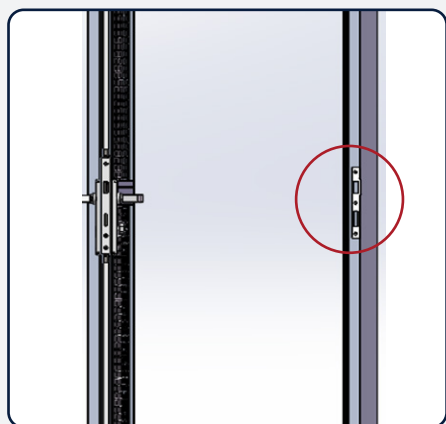

3-POINT LOCK OPERATION

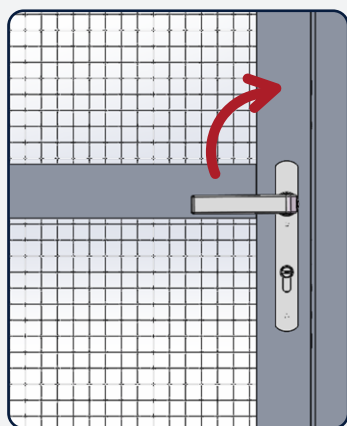

To activate 3 point lock, move the handle upward

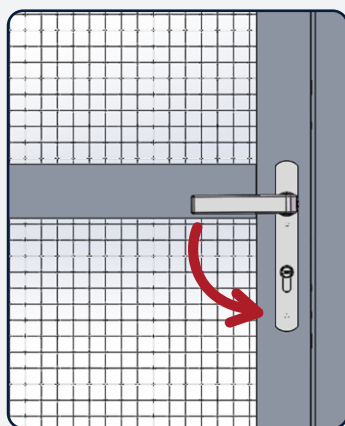

Move the handle down to disengage the 3 point lock.


To lock the door

Insert the key, lift handle slightly UP and turn clockwise 1 full turn to engage lock. The 3 point lock is now locked into place.

Alternatively, turn the indoor lock cylinder counter-clockwise once whilst lifting the handle slightly UP to engage the lock.

To unlock the door

Insert the key, turn counter-clockwise 1 full turn to unlock. OR turn the indoor lock cylinder clockwise once.

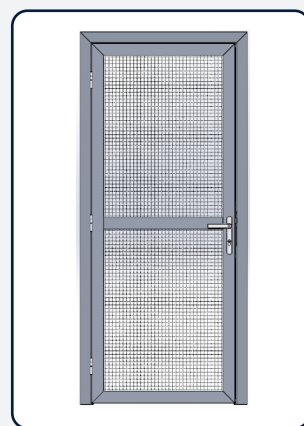

Note: You will need to ensure to pull the handle slightly upwards when turning the key to engage the lock into place.

