


barelli

INSTALLATION GUIDE

Pre-installation checks


1. Ensure that there is no damage to the glass mirror, warranty claims for damaged mirrors will not be accepted after the mirror has been installed.
2. Ensure the mirror's power cord is not damaged in any way. DO NOT install the mirror if the power cord is damaged, return to your local Bunnings store for exchange or refund.
3. Check that all assembly components have been included.
4. This mirror is designed to be installed over and existing recessed or low-profile power outlet. If modifications are required to your power outlet, these MUST be performed by a licensed electrician.

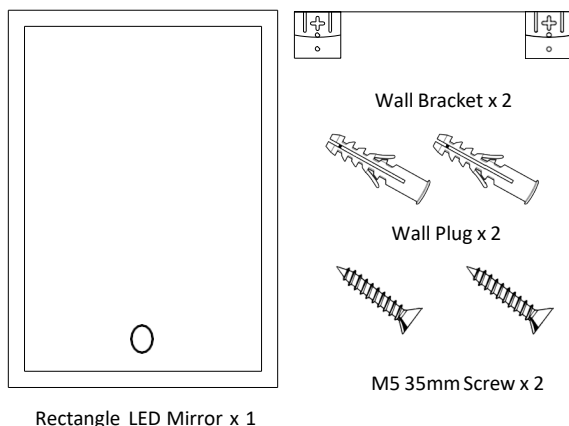


Installation

1. Work out the desired location for the mirror taking into account the minimum clearances and recommended power outlet locations in the diagrams to the right.
2. If any modifications are required to the power outlet type or location, these MUST be carried out by a licensed electrician.
3. Mark and drill holes based on the desired location established in Step 1. Ensure holes are level.


Verify Minimum Clearances

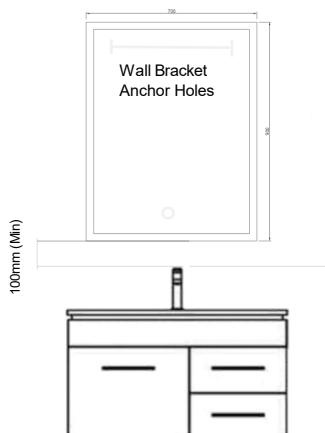


Recommended Power Outlet Locations

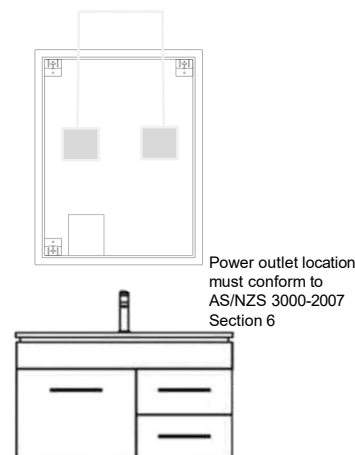

4. Drill holes using a suitable drill bit for the wall surface and substrate. NOTE that the fixings provided are suitable for solid walls only. It is the installers responsibility to ensure the fixings used are suitable for the wall type.
5. Insert the wall plugs.
6. Hammer the provided screws spike into the wall plug.

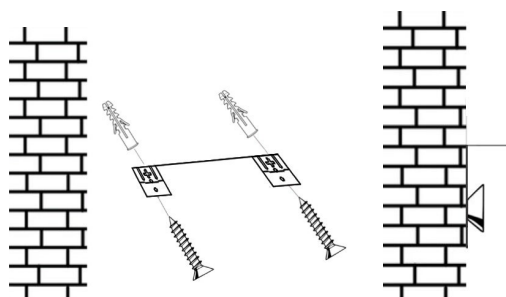

7. Place mirror wall brackets into the screws so the wall brackets are fully engaged in the channel on the screws. Once engaged, check to ensure the position of the mirror is correct and that the power cord is not obstructing the mirror from laying flush on the wall.
8. Push the mirror's power plug into the power outlet and switch on.

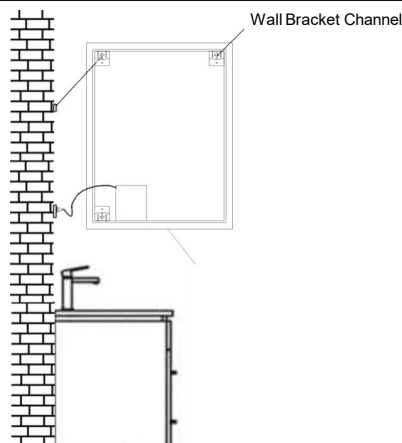


RECTANGLE LED MIRROR 700X900 MM

barelli

OPERATIONAL GUIDE

1. Press the touch sensor on the bottom of mirror surface to turn on the LED mirror light.
2. Hold finger on the touch sensor to control the brightness. LED will begin to dim or brighten.
3. Mirrors features hanging options for both Vertical or Horizontal format.

Vertically

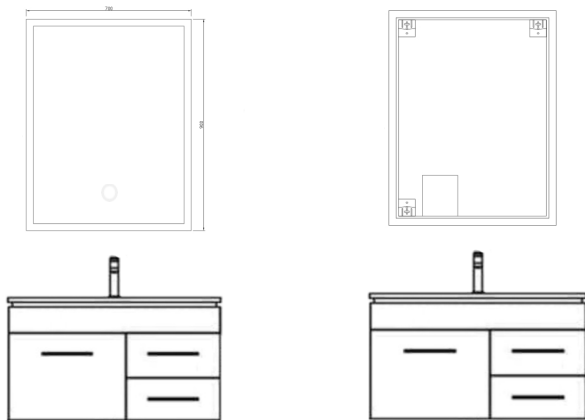

Horizontally

