OPERATOR'S MANUAL LINK Modular Storage System

Your kit may not include all items shown. Please consult your packaging for the exact items included in your kit. To purchase additional accessories, visit https://www.ryobi.com.au/

SAFETY RULES

WARNING:

Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

READ ALL INSTRUCTIONS

- **Know your product.** Read operator's manual carefully. Learn its applications and limitations, as well as the specific potential hazards related to this product. Following this rule will reduce the risk of serious personal injury.
- The maximum weight of all the items placed on each wall rail must not exceed 94 ka
- Do not exceed the maximum weight capacity for the wall rails or accessories.
 Secure the wall rail to the wall following the instructions in this operator's
- manual. Failure to properly secure each wall rail will reduce the wall rail's See Figures 1 - 3. maximum weight capacity. ■ To reduce risk of injury, do not use accessories which are not specifically designed
- and recommended by the manufacturer. These are hanging wall rails. Do not use for any other purpose than supporting
- tools or products. **Keep the area around the wall rails clean and well lit.** Cluttered or dark areas invite accidents
- Mount the wall rails in a dry, indoor place protected from wet conditions.
 Keep wall rails dry, clean, and free from oil and grease.
- **Do not use the wall rail if it is damaged or broken.** A damaged or broken wall rails may not mount securely and/or it might not provide adequate support for the items stored on it.
- When servicing this product, use only identical replacement parts. Use of unauthorised parts may create a risk of injury.
- Mount the wall rails to sound structural supports. NEVER mount the wall rails to drywall or plaster without the mounting fastener going into a structural support. Failure to properly mount the wall rails could result in a failing hazard that can cause death or serious personal injury.
- Mount the wall rails on smooth and flat surfaces capable of bearing the weight of wall rails and the items stored on it.
- Use extra care when mounting the wall rails. Keep proper footing and balance at all times.
- Ensure the wall rails are securely mounted. Make sure they do not rock, slide, or move before storing products or tools.
- Always wear eye protection with side shields marked to comply with AS/NZS 1337.1 during installation. Following this rule will reduce the risk of serious personal injury
- Do not allow children or untrained individuals to use these wall rails.
- Store idle power tools out of the reach of children
- SAVE THESE INSTRUCTIONS. Refer to them frequently and use them to instruct other users. If you loan someone this product, also loan these instructions.

SYMBOLS

The following signal words and meanings are intended to explain the levels of risk associated with this product.

| SYMBOL | SIGNAL | MEANING |
|--------|----------|---|
| | DANGER: | Indicates a hazardous situation, which, if not avoided, will result in death or serious injury. |
| | WARNING: | Indicates a hazardous situation, which, if not avoided, could result in death or serious injury. |
| | CAUTION: | Indicates a hazardous situation, that, if not avoided, may result in minor or moderate injury. |
| | NOTICE: | (Without Safety Alert Symbol) Indicates infor- mation considered important, but not related to a potential injury (e.g. messages relating to property damage). |

Some of the following symbols may be used on this product. Please study them and learn their meaning. Proper interpretation of these symbols will allow you to operate the product better and safer.

| SYMBOL | NAME | DESIGNATION/EXPLANATION |
|--------|---------------------------|--|
| | Safety Alert | Indicates a potential personal injury hazard. |
| 63 | Read Operator's Manual | To reduce the risk of injury, user must read and understand operator's manual before using this product. |
| | Eye Protection | Always wear eye protection with side shields marked to comply with AS/NZS 1337.1. |

FEATURES

PRODUCT SPECIFICATIONS Maximum Weight Capacity'

Wall rail. 94 kg (34kg per 300 mm) Wall rails must be secured to the wall according to the instructions in this operator's manual to achieve maximum weight capacity

Maximum weight capacities for the hooks and accessories have ranges from 7 kg to 23 kg and vary for each individual item. Please consult the package for your kit for the proper weight capacities of the included items.

Wall rails must attach to studs and anchors used between studs to achieve maximum weight capacity. See Figure 2.

INSTALLATION

WARNING:

To reduce the risk of injury, do not attempt to use this product until you have read thoroughly and understand completely this operator's manual and the operator's manual for any power tools used.

TOOLS NEEDED (NOT INCLUDED)

Drill, level, 3 mm and 9 mm drill bits, pencil, hammer and Phillips screwdriver MOUNTING THE WALL RAILS

WARNING:

Only install screws into sound structural supports (such as studs) in areas where no electrical wires, utility cables, pipes, or other obstructions are located. Failure to follow these instructions can result in death, electrical shock, or other serious personal injury.

. Using a stud finder, locate two studs behind your wall and mark with a pencil.

Place the wall rail against the wall, making sure to place the rail centre over, the two marked studs.


- 3. Mark the screw holes with a pencil on the left and right of the wall rail.
- 4. Remove the wall rail and using an AC or DC drill, drill 9 mm holes through each mark.
- These holes are for the wall anchors and should not be in to studs. 5. Insert the wall anchors into the pilot holes.
- **NOTE:** Use your fingers to squeeze and press the anchor into the pilot hole. Tap the head of the anchor lightly with a hammer until it is flush with the wall.
- 6. Place the wall rail back on the wall in the same location as before.
- 7. Secure the wall rail to the wall by screwing the left and right side of the plate into the wall anchors with the provided screws.
- 8. Next mark holes in your upper and lower installation channels, above your premarked studs.
- 9. Using an AC or DC drill, make two 3 mm holes in both the lower and upper installation channels for each marked stud.
- 10. Secure the wall rail to the studs using the provided screws.
- . Repeat steps to confirm if this reduces the load rating. NOTE: Where it is not possible to secure the wall rail to two studs. secure the middle of the rail to a stud and use the included wall plugs to secure each side of the plate to the wall.


ATTACHING/REMOVING ACCESSORIES

- See Figures 4 5.
- 1. Mount the wall rails as described above.
- 2. Position the accessory between two of the raised octagonal patterns on the wall rail. 3. Insert the tabs on the accessory into the openings on the wall rail.
- 4. Push the accessory in and down to secure.
- 5. If desired, insert an M5 30 mm screw through the centre of the accessory into the wall

rail to secure it. To remove an accessory:

- If applicable, remove the screw from the centre of the accessory.
- Slide the accessory up and away from the wall rail.
- If securing the wall rails into materials other than plasterboard, please use suitable
- fasteners and follow the manufactures instructions.

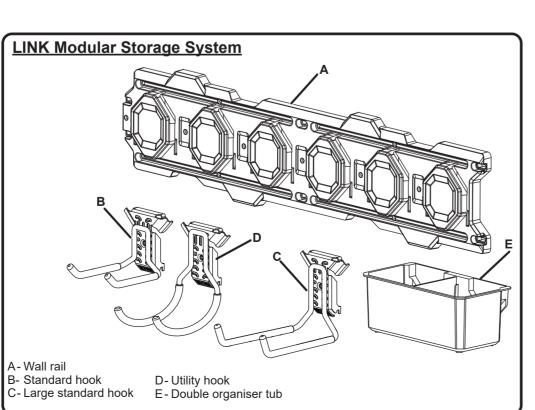

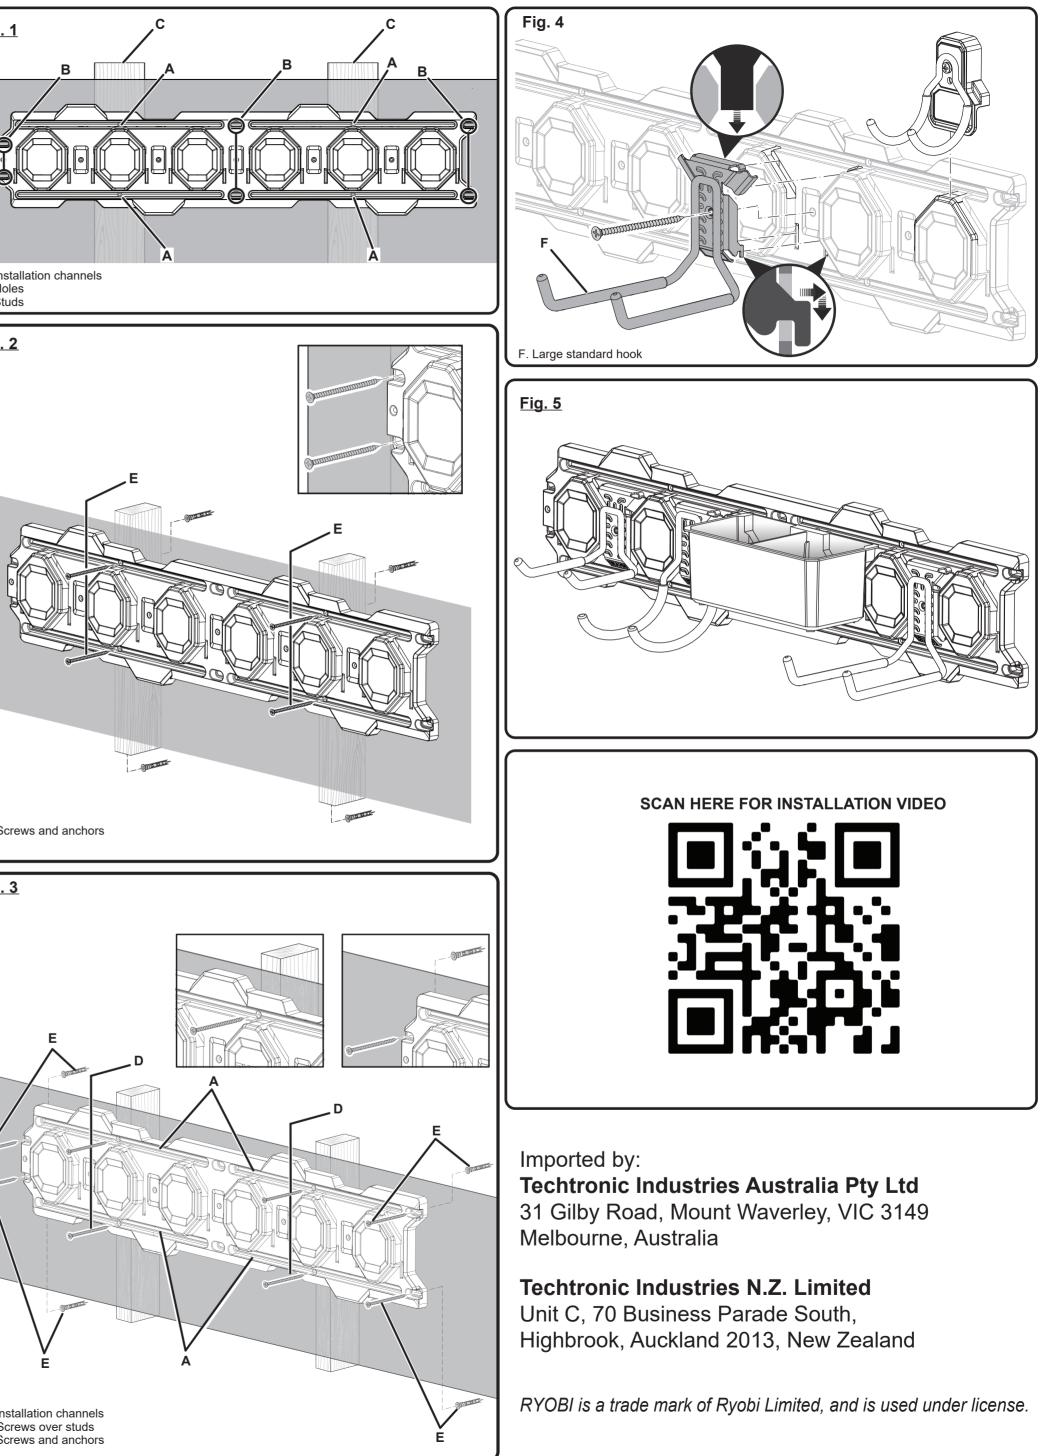

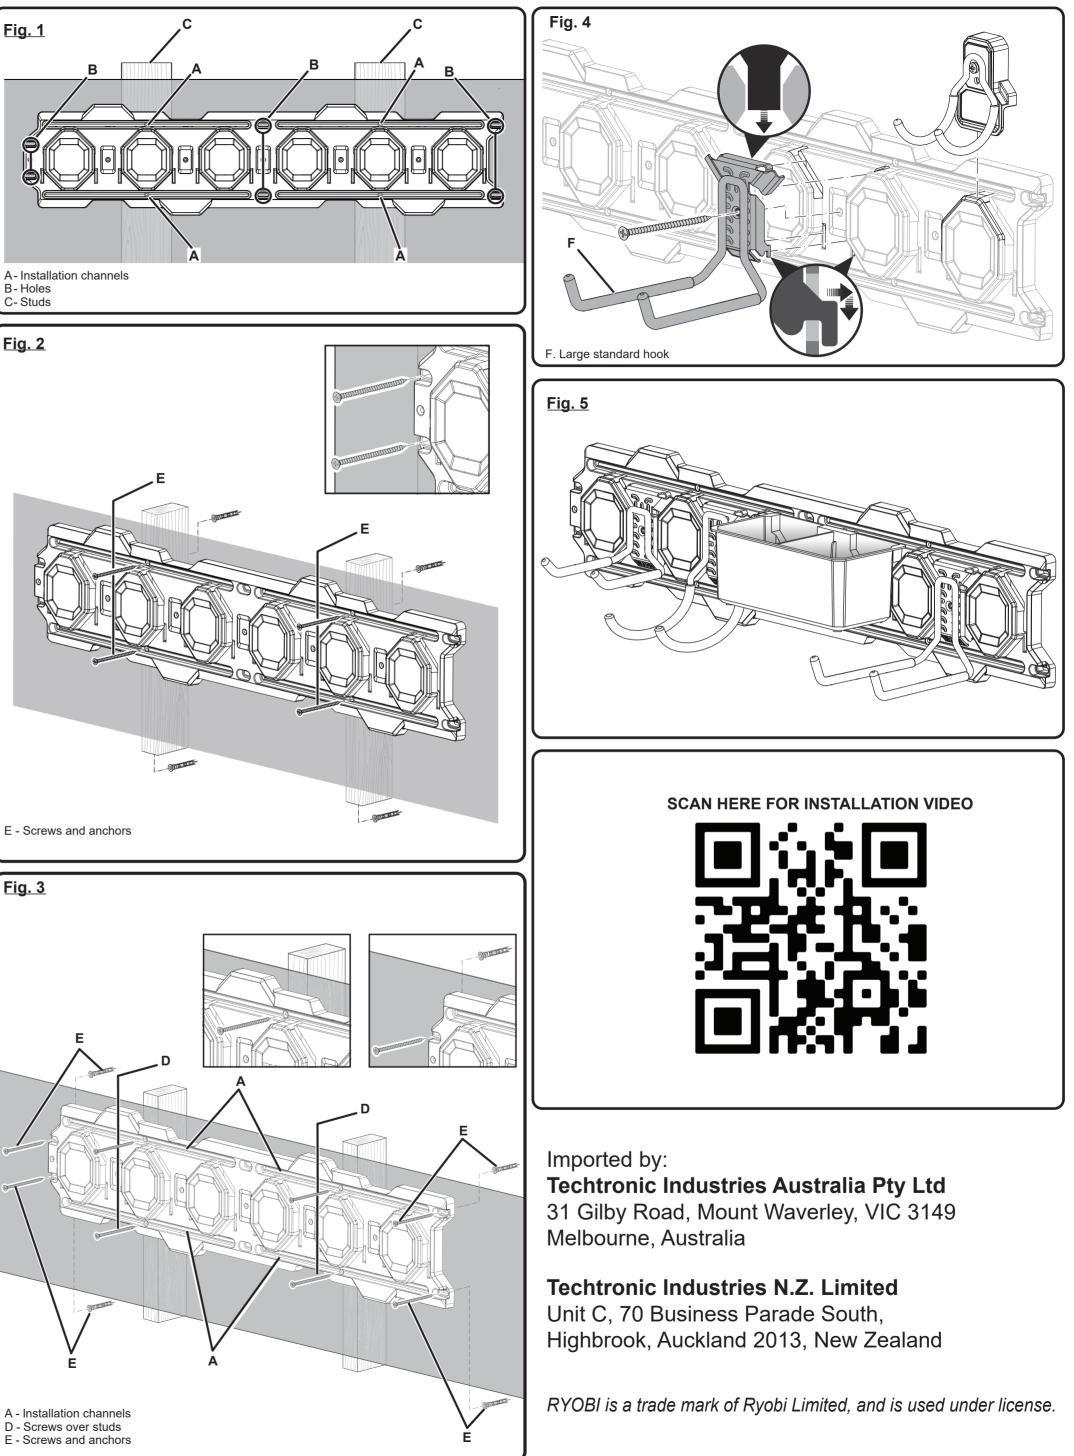


Fig. 3

