



Cabinet Refrigerators/Freezers Instruction manual



Model

DL893-A/DL894-A/DL895-A/DL896-A/DL897-A/DL898-A/DL899-A /CK480-A

Safety Tips

- Position on a flat, stable surface.
- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components or service panels on this product.
- Consult Local and National Standards to comply with the following:
 - Health and Safety at Work Legislation
 - BS EN Codes of Practice
 - Fire Precautions
 - IEE Wiring Regulations
 - Building Regulations
- DO NOT use jet/pressure washers to clean the appliance.
- DO NOT use the appliance outside.
- DO NOT use this appliance to store medical supplies.
- DO NOT use electrical appliances inside the appliance (e.g. heaters, ice-cream makers etc.)
- DO NOT stand or support yourself on the base, drawers or doors.
- DO NOT allow oil or fat to come into contact with the plastic components or door seal. Clean immediately if contact occurs.
- Bottles that contain a high percentage of alcohol must be sealed and placed vertically in the refrigerator.
- Always carry, store and handle the appliance in a vertical position and move by holding the base of the appliance.
- Always switch off and disconnect the power supply to the unit before cleaning.
- Keep all packaging away from children. Dispose of the packaging in accordance with the regulations of local authorities.
- If the power cord is damaged, it must be replaced by a POLAR agent or a recommended qualified technician in order to avoid a hazard.

Product Description

- DL893-A** - 600 litre Single Door Stainless Steel Refrigerator
- DL894-A** - 600 litre Single Door Stainless Steel Freezer
- DL895-A** - 1200 litre Double Door Stainless Steel Refrigerator
- DL896-A** - 1200 litre Double Door Stainless Steel Freezer
- DL897-A** - 1200 litre Double Door White Freezer
- DL898-A** - 1200 litre Double Door White Refrigerator
- DL899-A** - 600 litre Single Door White Refrigerator
- CK480-A** - 600 litre Single Door White Freezer

Introduction

Please take a few moments to carefully read through this manual. Correct maintenance and operation of this machine will provide the best possible performance from your POLAR product.

Pack Contents

The following is included:

- POLAR Refrigerator or Freezer
- Keys x 2
- Shelf guides x 6 (Single)/ x 12 (Double)
- Shelves x 3 (Single)/ x 6 (Double)
- Instruction manual

POLAR prides itself on quality and service, ensuring that at the time of packaging the contents are supplied fully functional and free of damage.

Should you find any damage as a result of transit, please contact your POLAR dealer immediately.

Installation



Note: If the appliance has not been stored or moved in an upright position, let it stand upright for approximately 12 hours before operation. If in doubt allow the appliance to stand.

1. Remove the appliance from the packaging. Make sure that all protective plastic film and coatings are thoroughly removed from all surfaces.
2. Maintain a distance of 20cm (7 inches) between the unit and walls or other objects for ventilation. Increase this distance if the obstacle is a heat source.



Note: Before using the appliance for the first time, clean the shelves and interior with soapy water.


3. Set the brakes on the castors to keep the appliance in position
OR
Level the appliance by adjusting the screw feet.

Removing the Compressor Safety Band

The compressor is located on the top of the appliance, and sits on rubber washers. Under normal operating conditions the compressor is allowed to vibrate.

To avoid damage through excessive motion during transit, a stainless steel safety band is placed over the compressor and screwed into the top of the appliance.

This safety band and the two screws fixing it to the appliance **must be removed** before the appliance is turned on.

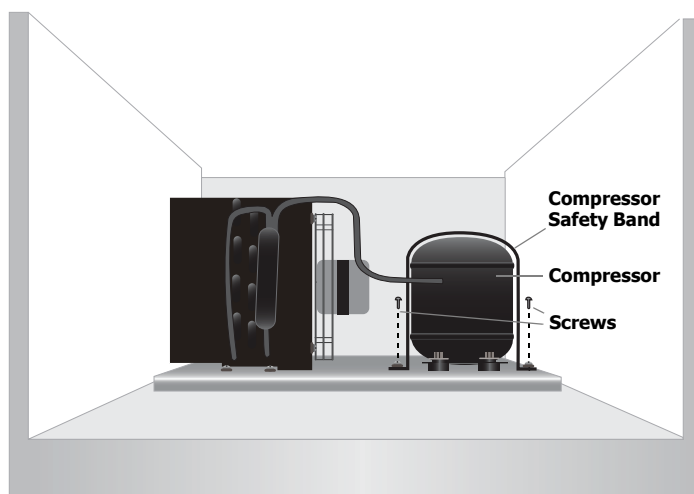

Lock/Unlock the Doors

A lock is fitted to the doors to ensure foodstuffs are kept secure within your POLAR appliance.

Use the keys provided to lock/unlock the doors.

Fitting the Shelves

1. Place one set of shelf guides on either side of the cabinet at the desired height.
2. Slide the shelf into place.
3. Repeat for the remaining shelves..

Operation

Storing Food

To get the best results from your POLAR appliance, follow these instructions:

- Only store foodstuffs in the appliance when it has reached the correct operating temperature.
- Do not place uncovered hot food or liquid inside the appliance.
- Wrap or cover food where possible.
- Do not obstruct the fans inside the appliance.
- Avoid opening the doors for prolonged periods of time.

Turn On

1. Close the door(s) of the appliance.
2. Ensure the power switch is set to [O] and turn on at the socket.
3. Switch on the Power [I]. The current temperature within the appliance is displayed.

Control Panel

To See the Setpoint

Push and immediately release the SET key: the display will show the Setpoint value

Changing the Setpoint

- 1) Push the SET key for more than 2 seconds to change the Setpoint value
- 2) The value of the set point will be displayed and the COMPRESSOR LED starts blinking
- 3) To change the Set value push the UP and DOWN buttons within 10 seconds
- 4) To store the new Setpoint push the SET key or wait 10 seconds

Manual Defrost

The appliance will automatically run a defrost cycle every six hours.

⚠ Note: The cycle starts from the time the appliance is initially powered up.

To manually defrost the appliance:

1. Press and hold the aux button for more then 2 seconds.
2. The defrost cycle will start immediately and the Defrost LED illuminates. .

⚠ Note: Starting a manual defrost also resets the automatic defrost timer.

3. The next automatic defrost will start six hours after the manual defrost has finished.



Cleaning, Care & Maintenance

- Defrost appliance at least every 3 months, more often if required
- Switch off and disconnect from the power supply before cleaning.
- Clean the interior of the appliance as often as possible.
- Do not use abrasive cleaning agents. These can leave harmful residues.
- Clean the door seal with water only.
- Always wipe dry after cleaning.
- Do not allow water used in cleaning to run through the drain hole into the evaporation pan.
- Take care when cleaning the rear of the appliance. Sharp edges can cut.
- A POLAR agent or qualified technician must carry out repairs if required.

Stainless Steel Care.

To maintain the stainless steel exterior of your Polar item, please consider the following information:

Never:

- Use abrasive Scourers or scrubbing pads etc
- Use Chlorinated or acidic detergents
- Allow anything e.g. food, dirt, cleaning chemicals to remain on the surface for longer than necessary, clean them off right away.
- Allow the surface to remain wet.

Do:

- Clean often.
- Use soft Cloths or plastic Scourers.
- Rub with the grain of the metal, rather than across it.
- Use detergents and polish designed for cleaning Stainless Steel.
- Ensure that the cleaning products are washed off fully and that the steel is left dry.


Cleaning the Condenser

The condenser is part of the refrigeration system. The condenser requires monthly cleaning.

Always disconnect power supply before carrying out Routine Maintenance.

Failure to clean the condenser will reduce the performance and life of your Polar unit and may invalidate your warranty

The condenser is located above the refrigeration cabinet. These models have a removable filter which can be cleaned with a vacuum cleaner.

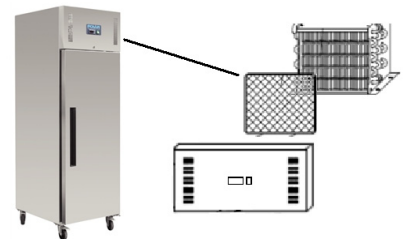

Troubleshooting

If your POLAR appliance develops a fault, please check the following table before making a call to the Helpline or your POLAR dealer.

| Fault | Probable Cause | Action |
|---|---|--|
| The appliance is not working | The unit is not switched on | Check the unit is plugged in correctly and switched on |
| | Plug and lead are damaged | Call POLAR agent or qualified Technician |
| | Fuse in the plug has blown | Replace the fuse |
| | Power supply | Check power supply |
| | Internal wiring fault | Call POLAR agent or qualified Technician |
| The appliance turns on, but the temperature is too high/low | Too much ice on the evaporator | Defrost the appliance |
| | Condenser blocked with dust | Clean condenser with hose attachment of vacuum |
| | Doors are not shut properly | Check doors are shut and seals are not damaged |
| | Appliance is located near a heat source or air flow to the condenser is being interrupted | Move the refrigerator to a more suitable location |
| | Ambient temperature is too high | Increase ventilation or move appliance to a cooler position |
| | Unsuitable foodstuffs are being stored in the appliance | Remove any excessive hot foodstuffs or blockages to the fan |
| | Appliance is overloaded | Reduce the amount of food stored in the appliance |
| The appliance is leaking water | The appliance is not properly levelled | Adjust the screw feet to level the appliance (if applicable) |
| | The discharge outlet is blocked | Clear the discharge outlet |
| | Movement of water to the drain is obstructed | Clear the floor of the appliance (if applicable) |
| | The water container is damaged | Call POLAR agent or qualified Technician |
| | The drip tray is overflowing | Empty the drip tray (if applicable) |
| The appliance is unusually loud | The safety band has not been removed | Remove the safety band |
| | Loose nut/screw | Check and tighten all nuts and screws |
| | The appliance has not been installed in a level or stable position | Check installation position and change if necessary |

Technical Specifications

| Model | Voltage | Power | Current | Temperature Range | Capacity (litres) | Refrigerant | Dimensions H x W x D (mm) | Weight (kg) |
|----------------|---------------|-------|---------|-------------------|-------------------|-------------|---------------------------|-------------|
| DL893-A | 220-240V 50Hz | 380 | 2.3A | -2°C to 10°C | 600 | R134a 300g | 2010 x 680 x 850 | 145 |
| DL894-A | 220-240V 50Hz | 600 | 2.8A | -15°C to -22°C | 600 | R404a 360g | 2010 x 680 x 850 | 148 |
| DL895-A | 220-240V 50Hz | 700 | 3.3A | -2°C to 10°C | 1200 | R134a 320g | 2010 x 1340 x 850 | 195 |
| DL896-A | 220-240V 50Hz | 700 | 3.3A | -15°C to -22°C | 1200 | R404a 450g | 2010 x 1340 x 850 | 198 |
| DL897-A | 220-240V 50Hz | 700 | 3.3A | -15°C to -22°C | 1200 | R404a 450g | 2010 x 1340 x 850 | 198 |
| DL898-A | 220-240V 50Hz | 700 | 3.3A | -2°C to 10°C | 1200 | R134a 320g | 2010 x 1340 x 850 | 195 |
| DL899-A | 220-240V 50Hz | 380 | 2.3A | -2°C to 10°C | 600 | R134a 300g | 2010 x 680 x 850 | 145 |
| CK480-A | 220-240V 50Hz | 600 | 2.8A | -15°C to -22°C | 600 | R404a 360g | 2010 x 680 x 850 | 148 |

Electrical Wiring

The plug is to be connected to a suitable mains socket.

POLAR appliances are wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

All POLAR appliances must be earthed, using a dedicated earthing circuit.

If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

Disposal

Regulations require refrigeration products to be disposed of by specialist companies who remove or recycle all gasses, metal and plastic components. Consult your local waste collection authority regarding disposal of your appliance. Local authorities are not obliged to dispose of commercial refrigeration equipment but may be able to offer advice on how to dispose of the equipment locally.

Alternatively call the POLAR helpline for details of national disposal companies.

Compliance

The WEEE logo on this product or its documentation indicates that the product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.



POLAR parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.

POLAR products have been approved to carry the following symbol:



All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of POLAR.

Every effort is made to ensure all details are correct at the time of going to press, however, POLAR reserve the right to change specifications without notice.

DECLARATION OF CONFORMITY

Equipment Type Refrigerator / Freezer
Model DL893-A, DL894-A, DL895-A, DL896-A, DL897-A, DL898-A,
DL899-A, CK480-A


Legislation C-Tick
AS/NZ 3820 Essential Safety Requirements for Low Voltage
Electrical Equipment

Standards EN 55014-1:2006, EN 55014-2:1997+A1
EN 61000-3-2:2006,
EN 61000-3-3:1995+A1+A2,
EN 61000-3-11:2000,
EN 55015:2006, EN 61547:1995+A1
AS/NZS 60335.2.89:2002+A1:2003+A2:2005+A3:2007 with: AS/
NZS 60335.1:2002+A1:2004+A2:2007+A3:2007

Producer Name POLAR
Producer Address 15 Badgally Road,
Campbelltown,
NSW 2560

I, the undersigned, hereby declare that the equipment specified above conforms to the above Legislation and Standard(s).

Date 24/03/11

Signature 

Full Name Richard Cromwell

Position Marketing Director

