


TRAY

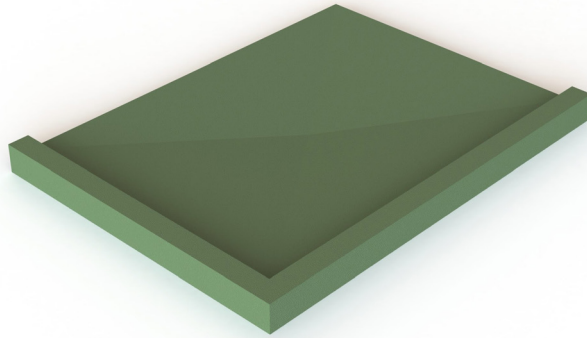

FEATURES


- Made from Lightweight Rigid Polyurethane
- Can be installed onto solid timber, particle board, concrete or slate/tile sub floors
- Preformed for tile application
- 20-year warranty

WASTE OPTIONS



Centre Waste


TRAY ORIENTATION

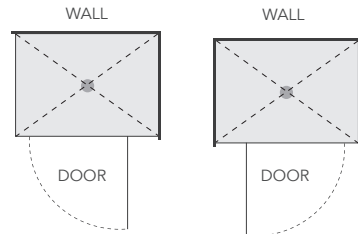

LEFT TRAY


RIGHT TRAY

SPECIFICATIONS

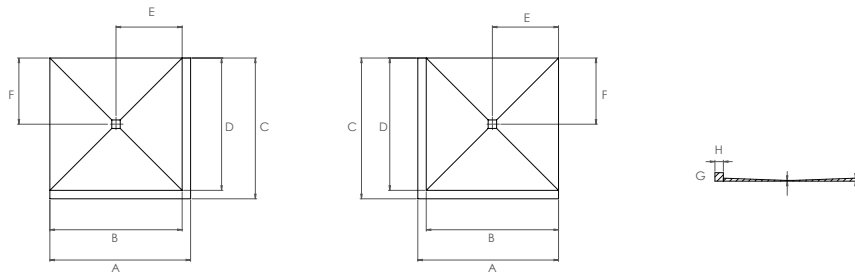

	A	B	C	D	E	F	G	H
QuickTile Tray Only 900x900 Centre Waste 2S	900	840	900	840	420	420	60	60
QuickTile Tray Only 1000x1000 Centre Waste 2S	1000	940	1000	940	470	470	60	60
QuickTile Tray Only 1200x900 Centre Waste LH 2S	1200	1140	900	840	570	420	60	60
QuickTile Tray Only 1200x900 Centre Waste RH 2S	1200	1140	900	840	570	420	60	60


TRAY

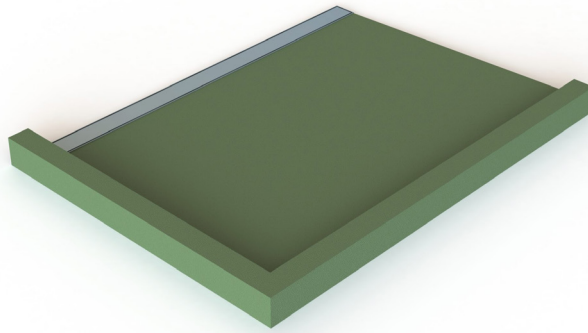

FEATURES


- Made from Lightweight Rigid Polyurethane
- Can be installed onto solid timber, particle board, concrete or slate/tile sub floors
- Preformed for tile application
- 20-year warranty

WASTE OPTIONS



Channel Drain



TRAY ORIENTATION

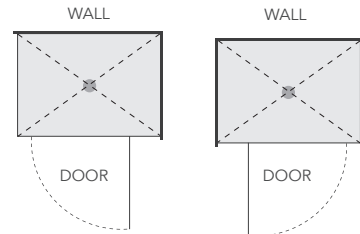

LEFT TRAY


RIGHT TRAY

SPECIFICATIONS

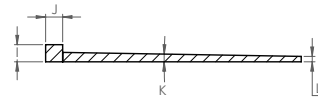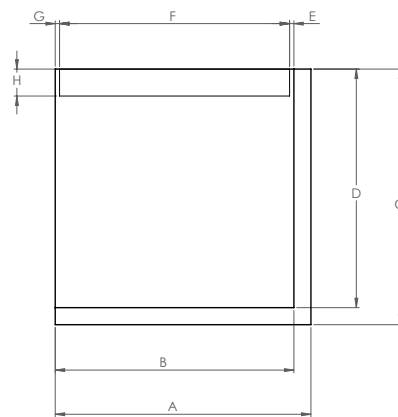

	A	B	C	D	E	F	G	H	I	J	K	L
QuickTile Tray Only 900x900 Channel Drain 2S	900	840	900	840	15	810	15	95	60	60	0.95	19
QuickTile Tray Only 1000x1000 Channel Drain 2S	1000	940	1000	940	15	910	15	95	60	60	0.95	19
QuickTile Tray Only 1200x900 Channel Drain 2S	1200	1140	900	840	65	1010	65	95	60	60	0.95	19

TRAY

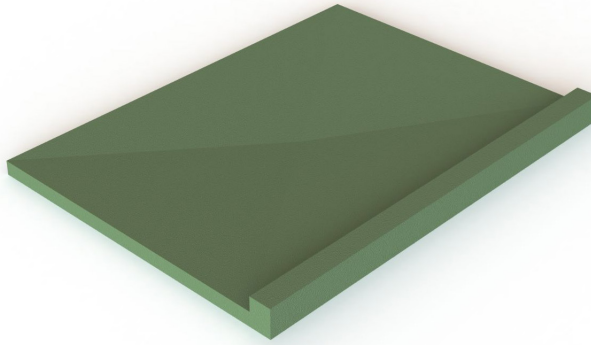

FEATURES


- Made from Lightweight Rigid Polyurethane
- Can be installed onto solid timber, particle board, concrete or slate/tile sub floors
- Preformed for tile application
- 20-year warranty

WASTE OPTIONS



Centre Waste


TRAY ORIENTATION

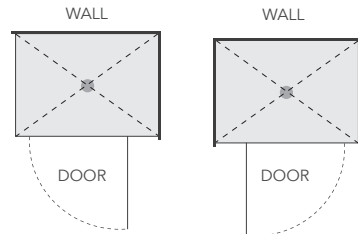

LEFT TRAY

RIGHT TRAY

SPECIFICATIONS

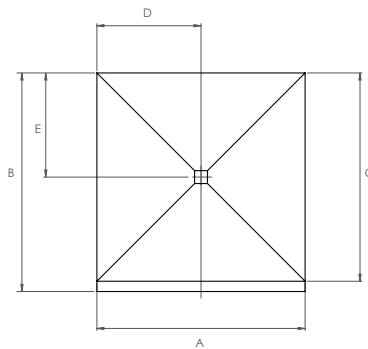

	A	B	C	D	E	F	G
QuickTile Tray Only 900x900 Centre Waste 3S	900	900	840	450	420	60	60
QuickTile Tray Only 1000x1000 Centre Waste 3S	1000	1000	940	500	470	60	60
QuickTile Tray Only 1200x900 Centre Waste 3S	1200	1000	940	600	470	60	60

PRODUCT INFORMATION

CLASS: TWO

DESCRIPTION

The QuickTile™ Tray System is made in New Zealand from high density, environmentally safe, rigid polyurethane, and replaces the need for a traditional sand and cement sloped tile shower base.

The QuickTile™ Tray System offers flexibility, as trays can be custom manufactured to suit individual requirements. QuickTile™ Trays are easy to install, can accommodate either a channel drain or standard tile waste, are suitable for above floor or recessed application, and can be manufactured to accommodate virtually any waste position.

The QuickTile™ Tile Tray System is bonded to the floor, using compliant "Wet Area" wall linings, a continuous waterproofing membrane on floors, tray and up the walls. This whole enclosure is then ready for tiling.

CONTRIBUTIONS TO COMPLIANCE

B2.3.1 (b) and B2.3.2: The Stein QuickTile™ shower system, when exposed to normal conditions of the environment and subjected use, is intended to have serviceable minimum life period of 20 years and be compatible with ceramic and stone tile finishes that have a serviceable life of between 15 to 25 years.

E3.3.2 and E3.3.6: The Stein QuickTile™ Shower System will prevent the passage of moisture from penetrating behind wall linings or entering concealed spaces. All surfaces of the membrane must have a finished surface of ceramic or stone tile.

F2.3.1: The Stein QuickTile™ Shower System is made from a rigid polyurethane base that does not give rise to harmful concentrations.

SCOPE OF USE

The Stein QuickTile™ Shower System is intended for use in the following environments.

- Buildings where an enclosed shower tray system and impervious waterproof membrane is required to floor and wall wet areas as defined in E3/AS2 to prevent damage to building elements and adjoining structures.
- Suitable for uses in applications such as residential housing, commercial bathrooms, hotels and apartments.

WARNINGS AND BANS

This product is not subject to warning or bans under section 26 of the Building Act 2004.

CONTACT DETAILS

Location: NZ for Local and Imported Products

Legal and Trading Name of Manufacturer:
Newline Group Ltd

Importer Address for Service:
54 Unutoto Place, Tauranga, 3171

Importer Website: stein.nz

Importer Email: sales@stein.co.nz

Importer Phone Number: 0800 002 299

CONDITIONS OF USE

- Refer to appraisal for full scope of system. The QuickTile™ system must be installed according to the QuickTile™ Installation manual.
- When designed and installed correctly, no maintenance of the Stein QuickTile™ shower system is required or is achievable. A regular check of the finished surfaces must be made to ensure it remains fully adhered to the substrate. Any cracks or damage that may occur to the finished surface must be repaired by a professional tradesperson immediately. Refer to Stein Maintenance Document for more information.
- Product should be installed by an experienced installer or tradesperson to ensure best outcome.

SUPPORTING DOCUMENTATION

The following additional documentation supports the above statements:

[QuickTile Installation Manual](#)

[Warranty Information](#)