CARBON MONOXIDE ALARM
DIGITAL DISPLAY WITH SEALED BATTERY

Carbon monoxide Alarm

QUELL

Move to Fresh Air — Alarm — Operate — Fault

10 year sealed-in lithium battery
Test/Reset button
Digital display
LED indicators
Peak level memory

PPM of CO displayed
Lb = Low Battery
End = End of Unit Life

Part Number: 140022

Model: Q10LLDCO
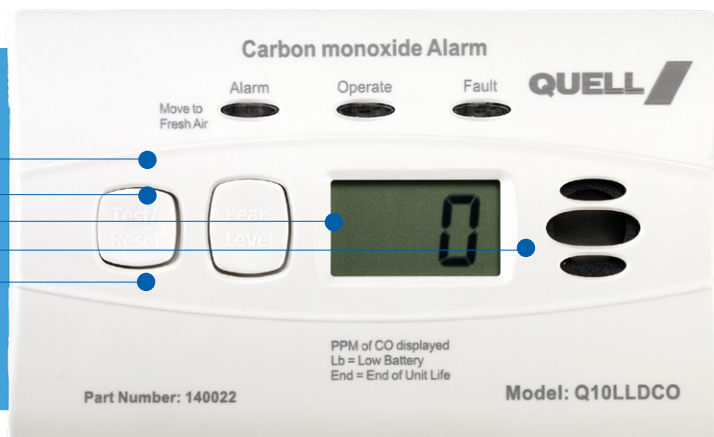
Quell Carbon Monoxide Alarm

The Quell® Worry-Free™ range of alarms provide a total smoke and CO alarm solution for the home.

Each smoke and COdetector is location specific, offering protection for bedrooms, living areas, kitchens and hallways.

Protect your family

House fires develop in different ways and are often unpredictable. As smoke alarms have sensing limitations, it is recommended that both ionisation and photoelectric smoke alarms be installed to provide maximum detection of the various types of fires that can occur within the home.

Ionisation sensing alarms may detect invisible fire particles (associated with fast flaming fires) sooner than photoelectric alarms. Photoelectric sensing alarms may detect visible fire particles (associated with slow smouldering fires) sooner than ionisation alarms.

Quell Worry-Free carbon monoxide alarms are easy to install and suitable for all living areas.

Please refer to the user manual prior to installing any smoke alarm.

EASY ROOM SELECTION
KITCHEN | HALLWAY
LIVING AREA | BEDROOM
CO CARBON MONOXIDE ALARM

Features and Benefits

- **Sealed-In lithium battery**
  Maintenance and hassle free with prevention from tampering and removal. The alarm is always on, with no battery replacement required for the 10 year life-span of the alarm

- **Peak level memory**
  Displays the highest CO concentrate measured since the last reset

- **Self activation**
  Alarm automatically activates when attached to the mounting bracket

- **Test/Reset button**
  Tests the alarm circuitry and horn. Resets memory after the alarm has sounded

- **LED indicators**
  Flashing green LED every 30 seconds indicates the unit is operating properly. Pulsing red LED with alarm indicates a dangerous level of carbon monoxide has been detected. Amber LED indicates the unit is in fault mode.

- **Deactivation switch**
  Disables the alarm to allow for safe battery disposal once the unit has reached the end of its 10-year life

- **10 year limited warranty**
  Provides peace-of-mind with a decade of carbon monoxide detection

10 YEAR WARRANTY

UKCA CE bsi Carbon Monoxide Alarms KITEMARK™

BS EN50291-1: 2018
LICENSE NO. KM 738897

CARBON MONOXIDE ALARM
DIGITAL DISPLAY

Product specifications

Product Code	140022
Model Number	Q10LLDCO
Power Source	Sealed lithium battery
Smoke Sensor	Electrochemical
Audio Alarm	85+ dB(A) at 3 m, 3.0 to 3.5 kHz pulsing alarm
Size	116 x 72 x 40mm
Weight	0.10 kg
Interconnects	No
Temperature	Operating range: -10°C to 45°C
Humidity	Operating range: up to 90% RH non-condensing
Warranty	10 year limited warranty
Approvals	Carbon Monoxide Alarms complying with BS EN50291-1: 2018 BS EN50291-2: 2019

Ordering information

Bar Code	Code	Pack Qty	Dimensions (D x W x H)	Weight	Pallet Qty
9315546400223	140022	Each	215 mm x 190 mm x 45 mm	0.314kg	192
29315546400227	140022	Inner box 4	238 mm x 202 mm x 230 mm	1.25kg	192
69315546400225	140022	Outer carton 24	628 mm x 502 mm x 250 mm	8.5kg	192

Distributed by:

Contact

For further information on Quell® smoke alarms, or other products in the Quell® range visit our website at **www.quell.com.au** or phone **1800 654 435**